

INSTRUCTIONS

CCT Adjustable Edge-lit Surface Mount Installation



RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: marketing@rablighting.com

**** DON'T TOSS IT—RECYCLE IT! MAKE THE SUSTAINABLE CHOICE BY RECYCLING THIS FIXTURE AT END OF LIFE WITH A LICENSED RECYCLING PROVIDER. ****



SUMO-R-x
SUMO-R-7/BP

IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

RAB fixture must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

TO PREVENT ELECTRICAL SHOCK, POWER SHOULD BE TURNED OFF AT THE FUSE BOX BEFORE INSTALLATION.

SAFETY WARNINGS:


Read all product labels and directions.

- **WARNING – Risk of fire or electric shock. Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings and where the input rating of the retrofit kit does not exceed the input rating of the luminaire.**
- **Installation should be performed only by a qualified electrician in accordance with the National Electrical Code and relevant local codes. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.**
- **WARNING – To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.**
- **INSTALLATION SHOULD ONLY BE PERFORMED AFTER POWER TO THE FIXTURE HAS BEEN DISCONNECTED.**
- **These instructions shall be included on an information sheet packaged with each unit.**
- **This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:**
(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.


This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

WHAT'S IN THE BOX



Fixture (1)




Nuts (3)



Screws (2)



Mounting plate (1)



Mounting plate (1) (15")

TOOLS NEEDED

Installation with J-BOX

A screw driver is needed for installation

INSTRUCTIONS

CCT Adjustable Edge-lit Surface Mount Installation



RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: marketing@rablighting.com

**** DON'T TOSS IT—RECYCLE IT! MAKE THE SUSTAINABLE CHOICE BY RECYCLING THIS FIXTURE AT END OF LIFE WITH A LICENSED RECYCLING PROVIDER. ****

INSTALLATION WITH J-BOX


1. Make sure the POWER IS TURNED OFF at the source to the J-box in which you are installing the product.
2. Remove the mounting plate from the back of the fixture. (Fig.1)

Fig: 1




3. Fasten mounting plate to J-BOX with mounting screws. (Fig.2)

Fig: 2

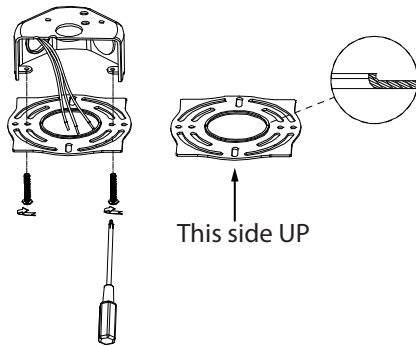

4. Select desired color temperature (CCT) using switch. (Fig.3)


Fig: 3

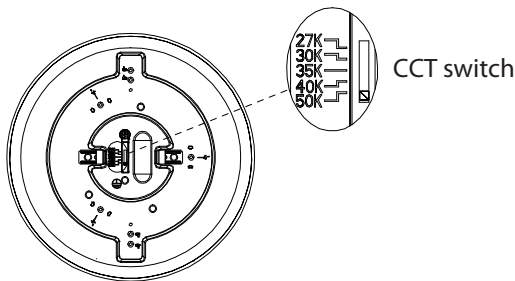

INSTALLATION WITH J-BOX (cont'd)


5. Wire the surface mount, white-white, black-black. Once wire connections are made, secure each with a wire nut. (Fig.4)

Fig: 4




6. Align spring clips on the fixture with mounting plate. (Fig.5)

Fig: 5




7. Carefully tuck wires into J-Box, and raise the surface mount up into place. (Fig.6)

Fig: 6



8. Caulk around the mounting surface edge with silicone sealant (Fig.7)

Fig: 7

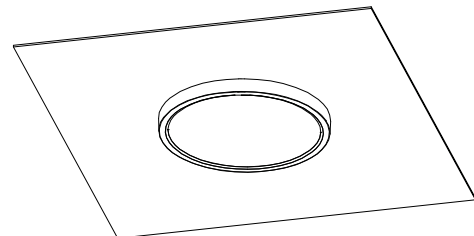

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.

INSTRUCTIONS

CCT Adjustable Edge-lit Surface Mount Installation




RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: marketing@rablighting.com

**** DON'T TOSS IT—RECYCLE IT! MAKE THE SUSTAINABLE CHOICE BY RECYCLING THIS FIXTURE AT END OF LIFE WITH A LICENSED RECYCLING PROVIDER. ****

INSTALLATION WITH J-BOX: 15"


1. Remove the mounting plate from the back of the fixture. (Fig.8)

Fig: 8




2. Fasten mounting plate to J-BOX with mounting screws. (Fig.9)

Fig: 9




3. Insert paper template into the installation bracket and rotate the paper. Use a pen to draw circles according to the outer size path of the template. (Fig.10)

Fig: 10



4. Select desired color temperature(CCT) using switch. (Fig.11)


Fig: 11

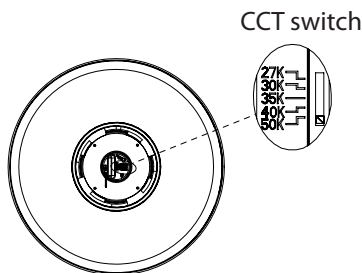

INSTALLATION WITH J-BOX: 15" (cont'd)


5. Fix the safety cable hook with the bracket hole. Wire the surface mount, white-white, black-black and green to ground wires. Once wire connections are made, secure each with a wire nut. (Fig.12)

Fig: 12

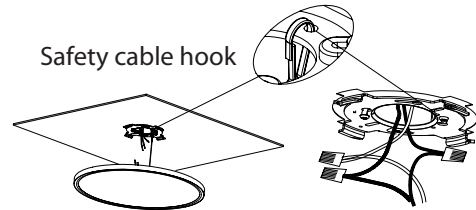


6. Carefully tuck wires and safety cable into the junction box. Align the lamp with the pre-marked path line, then rotate the luminaire clockwise to securely snap it into the mounting bracket. (Fig.13)

Fig: 13

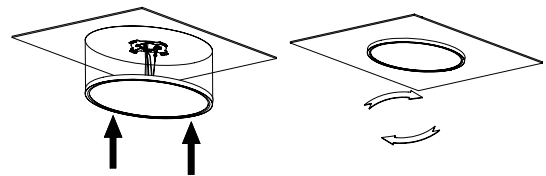

7. Caulk around the mounting surface edge with silicone sealant. (Fig.14)

Fig: 14



Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.