

Technical Specifications (continued)

Optical

BUG Rating:

B2 U3 G2

Installation

Mounting:

Four (4) anchor bolts provided for concrete pad mounting. Internal base support has leveling screws.

Other

Patents:

The design of BLED is protected by patents in US, Canada & China


Replacement:

Replaces up to 50W Metal Halide

5-Year, No-Compromise Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

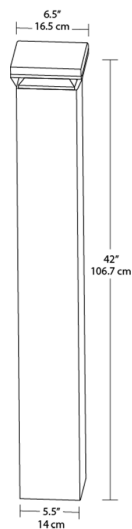

Features

- Backup battery UL924 listed
- Patent-pending base mount design for super sturdy installation
- Durable construction and vandal-resistant polycarbonate lens
- 90 minutes illumination time during power interruption
- 360° lighting pattern
- Precision-engineered optics deliver maximum downward lighting without glare
- Four leveling screws provided for easy installation
- 100,000-hour LED lifespan