



Color: Black

Weight: 0.8 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	12/9/06W
120V	0.10A	Color Temp	3000/4000/5000K
208V	N/A	Color Accuracy	82-85 CRI
240V	N/A	L70 Lifespan	100,000 Hours
277V	N/A	Lumens	636-1,324 lm
Input Watts	5.7-12.3W	Efficacy	100.2-116.4 lm/W

### Technical Specifications

#### Field Adjustability

##### Field Adjustable:

Field Adjustable Light Output:  
12W/9W/6W (factory default 12W)  
Color temperature selectable 3000K, 4000K and 5000K (factory default 4000K)

#### Compliance

##### UL Listed:

Suitable for wet locations

##### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

##### IP Rating:

Ingress protection rating of IP65 for dust and water

##### Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

#### Electrical

##### Driver:

Constant Current, Class 1, 120V, 50/60Hz, 120V: 0.10A

##### Dimming Driver:

TRIAC compatible dimmer with dimming as low as 10%.

##### THD:

14.53% at 120V

##### Power Factor:

99% at 120V

##### Surge Protection:

L/N:1 kV, L/N-PE:1 kV

##### Aux Power Supply:

No

##### Dim to Off:

No

#### LED Characteristics

##### LEDs:

Long-life, high-efficacy, surface-mount LEDs

#### Construction

##### Cold Weather Starting:

The minimum starting temperature is -40°F (-40°C)

##### Maximum Ambient Temperature:

Suitable for use in up to 104°F (40°C)

##### Lens:

Glass

##### Housing:

Die-cast aluminum

##### Reflector:

Polyethylene Terephthalate (PET)

##### Green Technology:

Mercury and UV free. RoHS-compliant components.

##### Finish:

Formulated for high durability and long-lasting color

#### Performance

##### Lifespan:

100,000-Hour LED lifespan based on IESIm-80 results and TM-21 calculations

#### Optical

##### NEMA Type:

NEMA Beam Spread 6H x 6V

#### Installation

##### Mounting:

Heavy-duty mounting arm with "O" ring seal and stainless steel screws


## Technical Specifications (continued)

### Other

#### 5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

### Dimensions

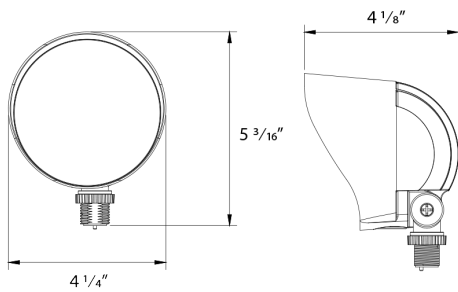

### Features

- 100,000-hour LED Life
- 120V
- 5-Year, limited warranty

### Ordering Matrix

Family	Wattage	Color Temp	Finish	Driver
BULLET	12		B	
	12 = 12/9/6W 20 = 20/15/10W 2X12 = 24/18/12W 2X20 = 40/30/20W	Blank = 3000/4000/5000K CCT Adjustable	A = Bronze B = Black VG = Verde Green W = White	Blank = 120V, TRIAC Dimming