



| | |
|---------------------|--------------|
| Project: | Type: |
| Prepared By: | Date: |

| Driver Info | | LED Info | |
|-------------|------------------|----------------|---------------------------|
| Type | Constant Current | Watts | 32W |
| 120V | 0.30A | Color Temp | 2700/3000/3500/4000/5000K |
| 208V | 0.17A | Color Accuracy | 90 CRI |
| 240V | 0.15A | L70 Lifespan | 50,000 Hours |
| 277V | 0.13A | Lumens | 2,450 lm |
| Input Watts | 32W | Efficacy | 77 |

Technical Specifications

Performance

Product Type:

Flush Mount

Description:

5-CCT selectable, back-lit LED retrofit fixture. Installs on standard junction boxes. Dimmable models available for 0-10V or TRIAC dimming systems with optional microwave sensor and/or integrated emergency battery backup.

Wattage Equivalency:

200W Incandescent

Input Wattage:

32W

Lumens (Nominal):

2,450lm

Efficacy:

77lm/W

Lumens (Measured):

2270lm @ 2700K; 2437lm @ 3000K; 2600lm @ 3500K; 2621lm @ 4000K; 2523lm @ 5000K

Lifespan:

50,000-Hour LED lifespan based on IESlm-70 results

Electrical

Driver:

Constant Current, Class 2

THD:

<20%

Power Factor:

≥0.9

Dimmable:

Yes, dimmable down to 10% on compatible 0-10V dimming systems. See Dimmer Compatibility List. Requires separate 0-10V DC dimming circuit.

Input Voltage:

120-277V

Operating Frequency:

50/60Hz

Input Current @ 120V (mA):

300mA

Input Current @ 208V (mA):

170mA

Input Current @ 240V (mA):

147mA

Input Current @ 277V (mA):

127mA

Operating Temperature:

-4°F to 104°F (-20°C to 40°C)

Emergency Operation:

90 minutes

LED Characteristics

Beam Angle:

120°

Color Temperature:

Field adjustable via dip switch
2700/3000/3500/4000/5000K

Color Accuracy (CRI):

90 CRI

R9 Value:

High color performance with R9 greater than 50

Color Consistency:

<4-step (2700K & 5000K); <7-step (3000K/3500K/4000K) MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Technical Specifications (continued)

Color Stability:

LED color temperature is warranted to Shift no more than 200K in color temperature over a 5-year period

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Installation**Mounting:**

Surface mount

Construction**Size:**

19"

Shape:

Round

Finish:

White

Enclosure Material:

Plastic

Trim Style:

Smooth

Lens Finish:

Frosted

Lens:

Polycarbonate light diffuser distributes light evenly and smoothly for general lighting applications

Compliance**Listings:**

UL Listed

Environment:

Suitable for use indoors and outdoors in dry, damp, or wet environments.

IC Rated:

No

Air Tight:

No

Certification Model Number:

DL50152(CRVFAS-19R-32-9CCT-UNV-W/EMBB)

California Title 20 Compliant:

No

California Title 24 JA8 Compliant:

Can be used to conform with the requirements of California Title 24 Part 6.

California Energy Commission (CEC) Status:

Lawful for Sales in California

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15 of the FCC Rules

Other**Compatible Accessories:**


CRVFA-CONVERTIBLE-KIT

Pendant mount kit for CRVFA

5-Year, No-Compromise Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

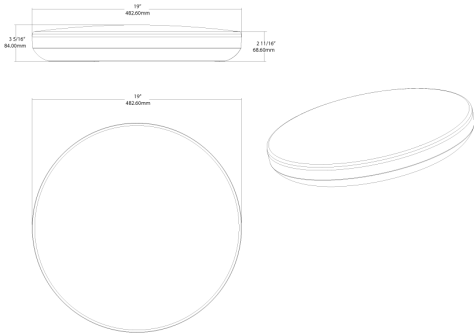

Features

- Surface mount to ceiling or wall
- Field-adjustable "set and forget" color temperature
- Diffused lens provides soft, smooth light
- Ideal for hospitality and multi-family residential applications
- Suitable for wet and damp locations

Ordering Matrix

| Family | Type | Size | Wattage | CRI/Color Temp | Driver | Finish | Sensor | Battery Backup |
|--------|---------------|--|----------------------------------|---|--|-------------------------------------|---|--|
| CRVFA | S | 19 | R | 32 | 9CCT | UNV | W | |
| | S = Smooth | 11 = 11" 19 = 19" 18 = 18" 14 = 14" 12 = 12" R = Round | 16 = 16W 20 = 20W 32 = 32W | 9CCT = 90 CRI, 2700/3000/3500/4000/5000K CCT Adjustable | UNV = 120-277V, 0-10V Dimming UNVT = 120-277V, TRIAC/ELV | W = White BN = Brushed Nickel | Blank = No Option /MVS = Microwave Occupancy Sensor | Blank = No Option /EM = Emergency Battery Backup /EMBB = Emergency Battery Backup |