



Project:	Type:
Prepared By:	Date:

Technical Specifications

Performance

Product Type:
Color Switching, Thermoplastic Exit Combo

Product Series:
ECOMBO34 Exit Sign Combo

Description:
Ultra economy thermoplastic exit combo that provides red/green switching capability in the field. Available in a white finish with round lamp heads.

Input Power (W):
1.8W

Lumens (lm):
160lm

Maximum Output Wattage (W):
4.2W

Construction

Housing Material:
Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating

Housing Finish:
Black Finish

Lettering:
Features 6" height letters with 3/4" stroke in both red and green colors.

Face Configuration:
Supplied with two faces for single or double face installation

Arrow Configuration:
Field-installable, removable chevron directional indicators for all configurations

Illumination Source:
2 Lamp Heads

Optical System:
SMT LED lamp heads for emergency mode

Head Orientation:
Adjustable heads for aiming light where required 330° Rotation, 40° Tilt

Remote Capable:
Yes - Remote version supports up to two (2) 3.6VDC Remote Heads

LED Characteristics

Color Temperature:
6500K

Electrical

Power Factor:
0.4

Input Voltage (V):
Universal 120-277 Voltage

Operating Frequency:
50/60Hz

Input Current @ 120V (A):
0.045A

Input Current @ 277V (A):
0.020A

Operating Temperature:
32°F to 104°F (0°C to 40°C)

Emergency Characteristics

Battery Backup:
Yes

Emergency Illumination:
90 minutes

Battery:
Built-in 3.6V 2000mAh NI-MH battery

Battery Voltage:
Battery Voltage

Technical Specifications (continued)

Recharge Time:

Maximum 24 hours for full recharge time

Battery Operating Temperature:

32°F to 122°F (0°C to 50°C)

Testing Method:

Integrated Test Switch & Charge Indicator

Installation

Mounting:

Universal J-Box Mounting Pattern

Application:

Wall Mount

Emergency Egress Coverage (ft) Mounting at height of 7.5 ft:

14'X3'

Compliance

Listings:

UL924 Listed, NFPA 101 (current Life Safety Code), NEC and OSHA illumination standards

Environment:

Suitable for use in dry and damp environments. Not suitable for applications with direct sunlight.

IP Rating:

IP20

T20 Compliant:

Can be used to conform with the requirements of California Title 20

California Title 24 JA8 Compliant:

No

California Energy Commission (CEC) Status:

Lawful for Sales in California

FCC:

Complies with Part 15 of the FCC Rules

Other


Compatible Products:

Standard Remote Heads
EREMOTE-1
EREMOTE
EREMOTE-1B
EREMOTE-B
Water Proof Remote Heads
EREMOTEOUT-1
EREMOTEOUT
EREMOTEOUT-1B
EREMOTEOUT-B
EREMOTEOUT-1W
EREMOTEOUT-W

3-Year, No-Compromise Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

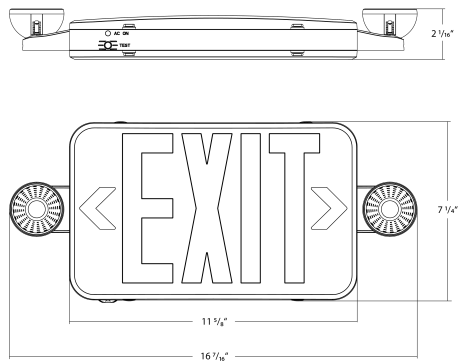

Features

- Universal faces with red/green letters
- Durable thermoplastic design
- 90 minutes of battery backup
- Compliant with California Title 20

Ordering Matrix

Family	Lettering Color	Remote Capacity	Housing Color	No of Sides
ECOMBO34	RG	R	B	
	Blank = Red Lettering RG = Red/Green Selectable Lettering	Blank = Not Remote Capable R = Remote Capable	Blank = White B = Black	Blank = Universal one side or doubled sided faces with removable left/right arrows