



Project:	Type:
Prepared By:	Date:

Technical Specifications

Performance

Product Type:

Exit Sign

Description:

Exit sign with remote capability and 90-minute emergency battery backup unit.

Input Power (W):

1.2W

Electrical

Power Factor:

0.4

Input Voltage:

120-277V

Operating Frequency:

50/60Hz

Input Current @ 120V (mA):

20mA

Input Current @ 277V (mA):

10mA

Maximum Output Wattage:

0.3W

Dual Voltage Circuit Operation:

No

Operating Temperature:

32°F to 104°F (0°C to 40°C)

Emergency Illumination:

90 minutes

Battery Type:

Nickel Cadmium

Battery Voltage:

1.2V

Recharge Time Required:

24-hours

Battery Operating Temperature:

0°F to 40°F (32°C to 104°C)

Storage Temperature:

68°F to 86°F (20°C to 30°C)

Storage Shelf Life:

3 years before the initial charge. 5 years after initial charge.

Self Diagnostics:

No, manual test only

Remote Test Switch:

No

Emergency Backup

Battery Backup:

Yes

Installation

Mounting Method:

Back/Top/Side

Mounting Type:

Wall/Ceiling Mount

Cold Weather Rated:

No

Construction

Shape:

Rectangle

Housing Material:

Thermoplastic

Housing Color:

White

Panel Material:

Thermoplastic

Technical Specifications (continued)**Panel Color:**

White

Letter Color:

Red/Green

Number of Faces:

Universal Single/Double Face

Arrow Direction:

Left/Right Arrow

Sign Format:

Stencil

Remote Capacity:

Yes

Remote Head Power (W):

2W

Remote Heads Replaceable:

No

Compliance

Listings:

UL924 Listed

Environment:

Suitable for use in dry and damp environments

IP Rating:

IP20

T20 Compliant:

Can be used to conform with the requirements of California Title 20

California Title 24 JA8 Compliant:

No

California Energy Commission (CEC) Status:

Lawful for Sales in California

FCC:


Complies with Part 15 of the FCC Rules

Other

5-Year, No-Compromise Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

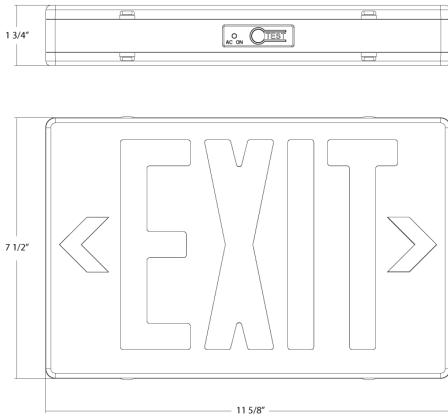

Features

- Double-face panel with red letters
- Durable thermoplastic design
- 90 minutes of battery backup
- N/A
- Compliant with California Title 20

Ordering Matrix

Family	Remote Capacity	Lettering Color	Battery Backup	Housing Color	No of Sides	Driver
EXIT						
	R = Remote Capable Blank = No Remote Capable	Blank = Red/Green Selectable Lettering	Blank = Battery Back Up	Blank = White	Blank = Universal one side or doubled sided faces with removable left/right arrows	Blank = 120-277V