



Color: Black

Weight: 3.2 lbs

Project:	Type:
Prepared By:	Date:

Technical Specifications

Performance

Product Type:

Color Switching, Thermoplastic Exit

Product Series:

EXIT/EXIT34 Exit Sign

Description:

Ultra-economy exit signs available field installed red or green letters and battery backup.

Construction

Housing Material:

Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating

Housing Finish:

Black Housing

Lettering:

Features 6" height letters with 3/4" stroke in both red and green colors.

Face Configuration:

Supplied with two faces for single or double face installation

Arrow Configuration:

Field-installable, removable chevron directional indicators for all configurations

Illumination Source:

Long-life LEDs provide diffuse illumination of exit face

Electrical

Power Factor:

0.4

Input Voltage (V):

120/277 Dual Voltage

Operating Frequency:

50/60Hz

Input Current @ 120V (A):

0.02A

Input Current @ 277V (A):

0.01A

Operating Temperature:

32°F to 104°F (0°C to 40°C)

Emergency Characteristics

Battery Backup:

Yes

Emergency Illumination:

90 minutes

Battery:

Built-in 1.2V 1000mAh Ni-MH battery provides ≥90 minutes of backup power.

Recharge Time:

Maximum 24 hours for full recharge time

Battery Operating Temperature:

32°F to 122°F (0°C to 50°C)

Testing Method:

Integrated Test Switch & Charge Indicator

Installation

Mounting:

Universal J-Box Mounting Pattern

Application:

Can be mounted on top, side or end mount

Compliance

Listings:

UL924 Listed, NFPA 101 (current Life Safety Code), NEC and OSHA illumination standards

Environment:

Suitable for use in dry and damp environments. Not suitable for applications with direct sunlight.

IP Rating:

IP20

Technical Specifications (continued)

T20 Compliant:

Can be used to conform with the requirements of California Title 20

California Title 24 JA8 Compliant:

No

California Energy Commission (CEC) Status:

Lawful for Sales in California

FCC:


Complies with Part 15 of the FCC Rules

Other

3-Year, No-Compromise Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

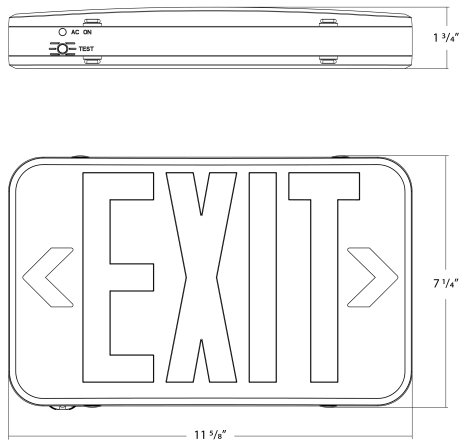

Features

- Universal faces with color letters
- Durable thermoplastic design
- Complies with California Title 20 requirements

Ordering Matrix

Family	Remote Capacity	Lettering Color	Battery Backup	Housing Color
EXIT34	RG	/E	B	
= Blank = No Remote Capable R = Remote Capable RG = Red/Green Selectable Lettering Blank = AC Only /E = Battery Back Up Blank = White B = Black				