

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	40/35/30/25/20W
120V	0.37A	Color Temp	3000/3500/4000/5000/6500K
208V	0.21A	Color Accuracy	83-85 CRI
240V	0.18A	L70 Lifespan	100,000 Hours
277V	0.16A	Lumens	2,649-4,994 lm
Input Watts	20.6-39.2W	Efficacy	126.9-131 lm/W

## Technical Specifications

### Field Adjustability

#### Field Adjustable:

Field Adjustable Light Output:  
40/35/30/35/20W (factory default 40W)  
Color temperature selectable by 3000K, 3500K, 4000K, 5000K and 6500 (factory default 4000K)

### Compliance

#### UL Listed:

Suitable for damp locations

#### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

#### IC Rated:

Suitable for direct contact with insulation

#### DLC Listed:

This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at [designlights.org](http://designlights.org) to confirm the qualification status of a specific SKU prior to specification or purchase.

### Electrical

#### Driver:

40W:  
Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.37A, 208V: 0.21A, 240V: 0.18A, 277V: 0.16A  
35W:  
Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.32A, 208V: 0.19A, 240V: 0.16A, 277V: 0.14A  
30W:  
Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.28A, 208V: 0.16A, 240V: 0.14A, 277V: 0.12A  
25W:  
Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.23A, 208V: 0.13A, 240V: 0.12A, 277V: 0.10A  
20W:  
Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.18A, 208V: 0.11A, 240V: 0.08A, 277V: 0.08A

#### Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

#### THD:

6.53% at 120V, 12.61% at 277V

#### Power Factor:

99.78% at 120V, 99.80% at 277V

#### Aux Power Supply:

Yes

### Dim to Off:

Yes

### Construction

#### Cold Weather Starting:

The minimum starting temperature is -4°F (-20°C)

#### Ambient Temperature:

Suitable for use in up to 104°F (40°C)

#### Housing:

Aluminum

#### Lens:

Polycarbonate lens

#### Finish:

Formulated for high durability and long-lasting color

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

### Installation

#### Mounting:

Recessed into existing T-grid brackets

### LED Characteristics

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs

**Technical Specifications (continued)**

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

**Performance**

**Lifespan:**


100,000-Hour LED lifespan based on IESlm-80 results and TM-21 calculations

**Other**

**5-Year Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Dimensions**

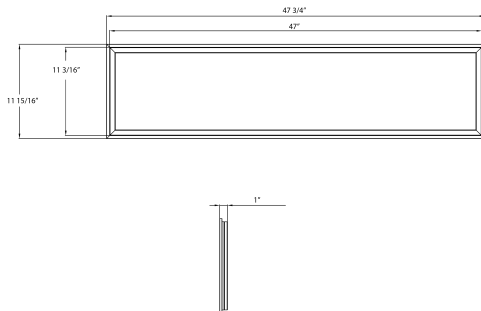

**Features**

- 100,000-hour LED Life
- DLC Premium Listed
- 0-10V dimming standard
- 5-Year, limited warranty

**Ordering Matrix**

Family	Size/Wattage	Color Temp	Finish	Driver	Options
FR	1X4				
	2X2 = 2'x2', 40/35/30/25/20W 1X4 = 1'x4', 40/35/30/25/20W 2X4 = 2'x4', 50/45/40/35/30W	Blank = 3000/3500/4000/5000/6500K CCT Adjustable	Blank = White	Blank = 120-277V, 0-10V Dimming	Blank = No Option /E = Battery Backup /LCB = Lightcloud Blue