



Color: Bronze

Weight: 1.0 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	8W
120V	0.07A	Color Temp	Amber
208V	0.00A	Color Accuracy	N/A CRI
240V	0.00A	L70 Lifespan	50,000 Hours
277V	0.00A	Lumens	182 lm
Input Watts	7.9W	Efficacy	23

**Technical Specifications**

**Compliance**

**UL Listed:**

Suitable for wet locations

**IP Rating:**

Ingress protection rating of IP65 for dust and water

**Trade Agreements Act Compliant:**

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**LED Characteristics**

**LEDs:**

Long-life, high-efficacy, discrete, surface-mount LEDs

**Color Consistency:**

7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for (SSL) Products, ANSI C78.377-2017.

**Electrical**

**Driver:**

Constant Current, Class 2, 120V, 50/60 Hz, 120V: 0.07A

**Dimmable:**

Yes, 120V with TRIAC dimmer

**Dim to Off:**

No

**Aux Power Supply:**

No

**Surge Protection:**

2.5 kV

**Performance**

**Lifespan:**

50,000-Hour LED lifespan based on IESIm-80 results and TM-21 calculations

**Construction**

**Cold Weather Starting:**

The minimum starting temperature is -40°F (-40°C)

**Maximum Ambient Temperature:**

Suitable for use in up to 104°F (40°C)

**Housing:**

Die-cast aluminum

**Tilt Increment:**

Rotates in 2 degree increments

**Lens:**

Tempered glass

**Gaskets:**

High-temperature silicone

**Finish:**

Formulated for high durability and long-lasting color

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

**Installation**

**Mounting:**


Knuckle arm mount

**Other**

**5-Year Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

## Dimensions

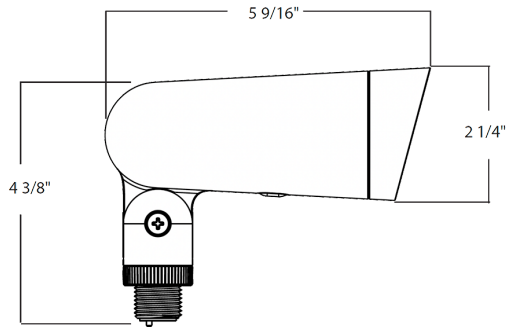

## Features

- Wildlife-friendly amber light
- 50,000-hour LED Life
- TRIAC dimming
- IP65 rating protects against dust and water
- 5-Year, limited warranty

## Ordering Matrix

Family	Size/Wattage	Mounting	Wavelength	Finish	Driver
LF34	S		YA		
	S = Small, 8W L = Large, 22W	Blank = Knuckle Arm	YA = Amber Wavelength 597 nm	Blank = Bronze W = White B = Black	Blank = 120V, TRIAC Dimming