



Fits decorator wall plates with only 1/2" protrusion. Gangable. Full 180° view covers 1000 sq. ft. Works with electronic ballasts. Can be wired in parallel. LED indicator, wallplate included. Can also be used as a ceiling sensor.

Color: White

Weight: 0.3 lbs

Project:	Type:
Prepared By:	Date:

Technical Specifications

Performance

Product Type:

In-wall PIR Sensor

Operation Mode:

Occ Mode / Vac Mode

Electrical

Rated Voltage:

120V, 50/60Hz

Rated Loaded:

Tungsten: 1000W@120VAC
 E-ballast: 600W@120VAC, 800W@277VAC
 Motor: 1/2HP@120VAC, 1HP@250VAC

Operating Temperature:

-20°C to 45°C (-4°F to 113°F)

Sensor Settings

Detection Range:

1,200 sq. ft @ 4 ft height
 46 ft front x 26 ft sides

Detection Angle:

180°

Time Setting:

30 sec - 30 min

Lux Setting:

5 - 1000 lux

Detection Technology:

PIR

Test Mode:

Yes

Override Switch:

Yes, with Override Switch

Compliance

Agency Certificate:

UL / FCC

Directive Compliance:

RoHS, REACH

Construction

Dimensions (W x H x D):


2.76" x 4.49" x 1.89"

Other

1-Year, No-Compromise Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of one (1) year from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

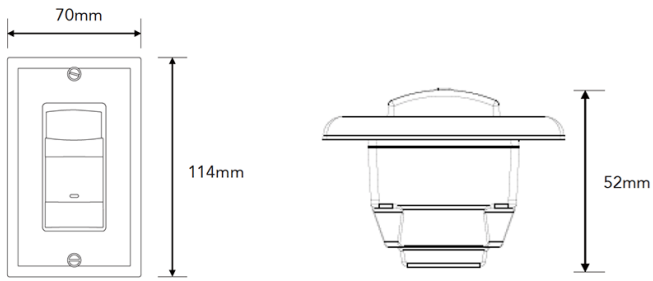

Features

- Full 180° view
- LED detection indicator
- Tough, vandal resistant lens
- Fits decorator wall plates
- Control panel cover only removable with wall plate to prevent tampering
- Manual off/auto switch
- Vandal proof sensor for schools, gyms and high abuse areas