

<b>Project:</b>	<b>Type:</b>	<b>Prepared By:</b>	<b>Date:</b>
-----------------	--------------	---------------------	--------------



**Features and Benefits**

- Replaces 18W/26W/32W 2G11 CFL Lamps
- Ballast Bypass. Integral Driver enables lamp to be wired directly to line voltage without need for an external driver or ballast
- 50,000 hour Lifespan
- Environmentally friendly, no mercury used
- UL Classified, DLC Listed
- Rated for use in enclosed and open fixtures in dry or damp locations
- 5 Year No Compromise Warranty

Technical Specifications		
<p><b>Performance</b></p> <p><b>Product Type:</b> Compact</p> <p><b>Input Wattage:</b> 17W</p> <p><b>Wattage Equivalency:</b> 40W Fluorescent</p> <p><b>Lumens:</b> 2,200lm</p> <p><b>Efficacy:</b> 129lm/W</p> <p><b>L70 Lifespan:</b> 50,000 Hours</p> <p><b>Electrical</b></p> <p><b>THD:</b> &lt;20%</p> <p><b>Power Factor:</b> 0.9</p>	<p><b>Dimmable:</b> Not suggested for dimming applications</p> <p><b>Operating Temperature:</b> -20°C to 45°C (-4°F to 113°F)</p> <p><b>Input Voltage:</b> 120-277V AC</p> <p><b>Operating Frequency:</b> 50/60Hz</p> <p><b>Construction</b></p> <p><b>Shape:</b> PLL</p> <p><b>Finish:</b> Frosted</p> <p><b>For Use Outdoors in Open Fixtures:</b> No</p> <p><b>LED Characteristics</b></p> <p><b>Color Temperature:</b> 4000K Cool White</p>	<p><b>Color Accuracy (CRI):</b> 82 CRI</p> <p><b>Installation</b></p> <p><b>Base Type:</b> 2G11</p> <p><b>Installation Type:</b> Type B, Ballast Bypass</p> <p><b>Installation Orientation:</b> Horizontal</p> <p><b>Other</b></p> <p><b>5-Year, No-Compromise Warranty:</b> RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <a href="http://rablighting.com/warranty">rablighting.com/warranty</a>.</p> <p><b>Compliance</b></p> <p><b>UL Recognized:</b> Yes</p>

## Technical Specifications (continued)

**UL Classified:**

Yes

**NSF Listed:**

Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones. Tube guard required in open fixtures.

**Certification Model Number:**

PLL-17-840-BYP

**California Energy Commission (CEC) Status:**

Lawful for Sales in California

**Application:**

Suitable for damp locations and totally enclosed fixtures.


**DLC Listed:**

This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at [designlights.org](http://designlights.org) to confirm the qualification status of a specific SKU prior to specification or purchase.

## Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	25	23.6	9.8	7
PALLET	1400	47.2	39.4	40.2

## Wiring Diagram

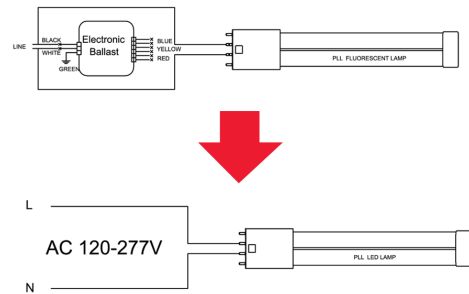

Dimension

