


<b>Project:</b>	<b>Type:</b>	<b>Prepared By:</b>	<b>Date:</b>
-----------------	--------------	---------------------	--------------

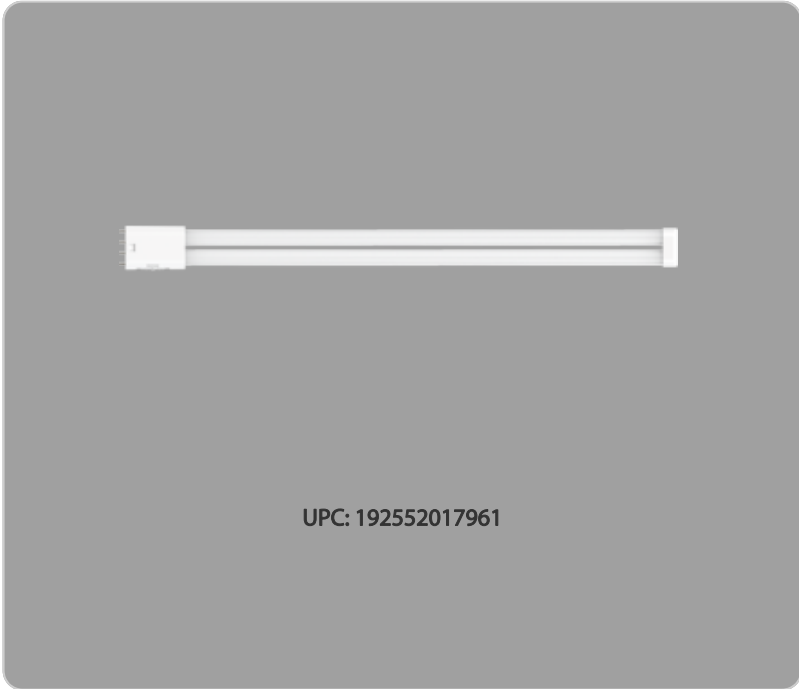

**Features and Benefits**

- 5 color temperatures in 1 SKU (3000/3500/4000/5000/6500K)
- Ballast Bypass-Install directly to line voltage
- Frosted diffuser eliminates glare and pixelation
- Rated for use in enclosed and open fixtures in dry or damp locations
- 5-Year, No-Compromise Warranty

Technical Specifications		
<p><b>Performance</b></p> <p><b>Product Type:</b> PLL Bypass</p> <p><b>Description:</b> PLL (Long) 4-Pin compact fluorescent replacements with CCT-Adjustability</p> <p><b>Wattage Equivalency:</b> 40W CFL</p> <p><b>Input Wattage:</b> 17W</p> <p><b>Lumens (Nominal):</b> 2050/2150/2200/2200/2300</p> <p><b>Efficacy:</b> 128.8/128.8/139/139/131.4</p> <p><b>L70 Lifespan:</b> 50,000-Hour LED lifespan based on IES LM-70 results</p>	<p><b>Electrical</b></p> <p><b>Driver:</b> Constant Current; 120-277V; 50/60 Hz 120V: 145mA, 208V: 91mA, 240V: 79mA, 277V: 68mA</p> <p><b>THD:</b> &lt;20%</p> <p><b>Power Factor:</b> 0.9</p> <p><b>Dimmable:</b> Yes, dimmable down to 10% on compatible TRIAC/ELV dimming systems. See Dimmer Compatibility List.</p> <p><b>Input Voltage:</b> 120-277V</p> <p><b>Operating Frequency:</b> 50/60Hz</p> <p><b>Operating Temperature:</b> -4°F to 113°F (-20°C to 45°C)</p> <p><b>Flicker:</b> 50%</p>	<p><b>LED Characteristics</b></p> <p><b>Beam Angle:</b> 140°</p> <p><b>Color Temperature:</b> Field adjustable via dip switch 3000/3500/4000/5000/6500K</p> <p><b>Color Accuracy (CRI):</b> &gt;80 CRI</p> <p><b>R9 Value:</b> High color performance with R9 greater than 0</p> <p><b>Color Consistency:</b> &lt;7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color</p> <p><b>Color Stability:</b> LED color temperature is warrantied to Shift no more than 200K in color temperature over a 5-year period</p> <p><b>Color Uniformity:</b> RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.</p>



**Technical Specifications (continued)**

**Installation**

**Installation Method:**

UL Type B, Ballast Bypass

**Installation Orientation:**

Universal Installation

**Base Type:**

2G11

**Construction**

**Shape:**

PLL

**Finish:**

White

**Endcap Material:**

Copper

**Enclosure Material:**

Constructed from frosted, shatter-resistant polycarbonate

**Lens Finish:**

Frosted

**Compliance**

**Listings:**

UL Classified, UL Recognized

**Environment:**

Suitable for use indoors in dry and damp environments.

**Fixture Rating:**

Suitable for use in enclosed fixtures.  
Suitable for use in open fixtures.

**Energy Star Approved:**

No

**DLC Listed:**

This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at [designlights.org](http://designlights.org) to confirm the qualification status of a specific SKU prior to specification or purchase.

**Certification Model Number:**

T20109(PLL-17-8FA-BYP)

**California Title 20 Compliant:**

No

**California Title 24 JA8 Compliant:**

No

**California Energy Commission (CEC) Status:**

Not Lawful for Sales in California

**NSF Listed:**

Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones. Tube guard required in open fixtures.

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**RoHS:**

Mercury and UV free. RoHS-compliant components.

**FCC:**

Complies with Part 15 of the FCC Rules

**Other**

**5-Year, No-Compromise Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

