



Color: Black

Weight: 0.5 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	14/11/7.5W
120V	0.06A	Color Temp	2700/3000/3500/4000/5000K
208V	N/A	Color Accuracy	90 CRI
240V	N/A	L70 Lifespan	N/A
277V	N/A	Lumens	1300/1050/750 lm
Input Watts	14/11/7.5W	Efficacy	100

Technical Specifications

Performance

Product Type:

LED Trim - Metal

Description:

Available in 4" and 6" models with 3 power settings and 5 field-adjustable color temperatures. Offered with smooth or baffle trims. Ideal for applications with tighter budgets.

Wattage Equivalency:

60W/75W/100W Incandescent

Input Wattage:

14/11/7.5W

Lumens:

1,300/1,050/750lm

Lumens (Measured):

7.5W
 2700K: 760lm
 3000K: 776lm
 3500K: 788lm
 4000K: 784lm
 5000K: 771lm

11W
 2700K: 1116lm
 3000K: 1138lm
 3500K: 1161lm
 4000K: 1156lm
 5000K: 1124lm

13W
 2700K: 1344lm
 3000K: 1382lm
 3500K: 1416lm
 4000K: 1397lm
 5000K: 1347lm

Efficacy:

100lm/W

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

Electrical

Driver:

Constant Current

THD:

≤20%

Power Factor:

≥0.9

Dimmable:

Yes, dimmable down to 10% on compatible TRIAC/ELV dimming systems. See Dimmer Compatibility List.

Input Voltage:

120V

Operating Frequency:

60 Hz

Input Current @ 120V (mA):

130mA

Operating Temperature:

-4°F to 104°F (-20 to 40°C)

Flicker:

≤30%

LED Characteristics

Beam Angle:

85°±10°

Technical Specifications (continued)**Color Temperature:**

Field-adjustable via dip switch
2700/3000/3500/4000/5000K

Color Accuracy (CRI):

90 CRI

R9 Value:

High color performance with R9 greater than 50

Color Consistency:

<4-step MacAdam Ellipse binning to achieve
consistent fixture-to-fixture color (2700K/5000K)

Color Stability:

LED color temperature is warrantied to Shift no more
than 200K in color temperature over a 5-year period

Color Uniformity:

RAB's range of Correlated Color Temperature follows
the guidelines of the American National Standard for
Specifications for the Chromaticity of Solid State
Lighting (SSL) Products, ANSI C78.377-2017.

Installation**Mounting:**

Recessed with housing

Construction**Size:**

6"

Shape:

Round

Finish:

Black

Material:

Constructed from spun aluminum

Trim Style:

Baffle

Lens Finish:

Frosted

Lens:

Single optic and full-face lens for precise beam angle
control

Compliance**Listings:**

UL Classified, UL Recognized

Environment:

Suitable for use indoors and outdoors in dry, damp,
or wet environments.

IC Rated:

No

Air Tight:

No

Energy Star Approved:

This product is ENERGY STAR® Certified.

Certification Model Number:

DLR0174(R34X-6B-B)

California Title 20 Compliant:

Can be used to conform with the requirements of
California Title 20

California Title 24 JA8 Compliant:

Can be used to conform with the requirements of
California Title 24 Part 6.

California Energy Commission (CEC) Status:

Lawful for Sales in California

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been
tested by an independent laboratory in accordance
with IESNA LM-79 and LM-80.

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15 of the FCC Rules

Trade Agreements Act Compliant:

This product is a product of Cambodia and a
"designated country" end product that complies
with the Trade Agreements Act

Other**Compatible Accessories:**

RFLED-GOOF-6R-8R-W

6"-8" Goof ring round white

DLTRIM/R6RS-BN

6" Color trim round smooth brushed nickel

DLTRIM/R6RS-BRZ

6" Color trim round smooth bronze

DLTRIM/R6RS-B

6" Color trim round smooth black

DLTRIM/R6RB-BN

6" Color trim round baffle brushed nickel

DLTRIM/R6RB-BRZ

6" Color trim round baffle bronze

DLTRIM/R6RB-B

6" Color trim round baffle black


RFLED-RETROBAND

6" Retrofit band

5-Year, No-Compromise Warranty:

RAB warrants that our LED products will be free from
defects in materials and workmanship for a period of
five (5) years from the date of delivery to the end
user, including coverage of light output, color
stability, driver performance and fixture finish. RAB's
warranty is subject to all terms and conditions found
at rablighting.com/warranty.

Dimensions

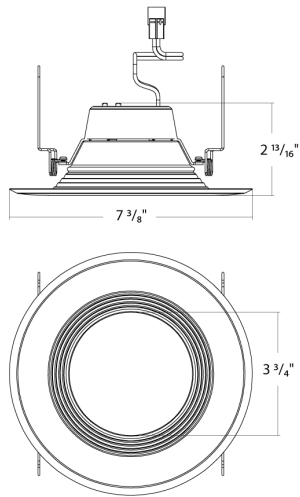

Features

- 4" & 5/6" Recessed LED trims are compatible with most recessed housings
- 3 Selectable lumen outputs: 4" - 500/600/700 lumens, 6" - 750/1,050/1,300 lumens
- 5 Color temperature selectable 2700K, 3000K, 3500K, 4000K, & 5000K
- Constructed from die-cast aluminum available in a smooth splay reflector or baffled trim with a smooth flat frosted polycarbonate lens
- Available in Painted White or Black finish. Optional color trim overlays sold separately.
- Dimmable down to 10% with compatible TRIAC/ELV dimmers, see dimmer compatibility list
- 5-year warranty, 50,000 hours lifespan, Title 24 JA8 and Title 20 compliant, wet location rated, Air Tight

Ordering Matrix

Family	Size/Wattage	Shape	CRI/Color Temp	Driver	Finish	Trim
R34X		6			B	B
	4 = 4", 7/6/5W 6 = 6", 14/11/7.5W	Blank = Round	Blank = 90 CRI, 2700/3000/3500/4000/5000K CCT Adjustable	Blank = 120V	Blank = White	Blank = Smooth B = Baffle