



Premium, linear high bay available in five sizes/wattages. Ultra-high efficacy. Designed to be ecofriendly

Color: White/aluminum

Weight: 22.4 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	400W
120V	3.42A	Color Temp	4000K (Neutral)
208V	1.98A	Color Accuracy	82.2 CRI
240V	1.71A	L70 Lifespan	100,000 Hours
277V	1.48A	Lumens	52,894 lm
Input Watts	386.8W	Efficacy	136.7

Technical Specifications

Compliance

UL Listed:

Suitable for damp locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

DLC Listed:

This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at designlights.org to confirm the qualification status of a specific SKU prior to specification or purchase.

Performance

Lifespan:

100,000-Hour LED lifespan based on IESIm-80 results and TM-21 calculations

Wattage Equivalency:

Equivalent to 1,000W Metal Halide

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Color Consistency:

3-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Color Stability:

LED Color temperature is warranted to Shift no more than 200K in color temperature over a 5-year period

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Electrical

Driver:

Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 3.42A, 208V: 1.98A, 240V: 1.71A, 277V 1.48A

THD:

2.34% at 120V, 7.69% at 277V

Power Factor:

99.9% at 120V, 96.5% at 277V

Surge Protection:

6 kV

Battery Backup:

Battery backup will operate the fixture for 90 minutes if power fails. Wired for 120-277V.

Battery Backup Light Loss Factor:

0.073

Construction

Cold Weather Starting:

The minimum starting temperature is -4°F (-20°C)

Maximum Ambient Temperature:

Suitable for use in up to 113°F (45°C)

Housing:

Extruded aluminum

Lens:

Polycarbonate lens

Reflector:

Polyethylene Terephthalate (PET)

Installation

Mounting:

V hooks (chain by others)

Technical Specifications (continued)**Sensor Settings****Maximum Mounting Height:**

40 ft

Voltage:

12V DC (+3V-0V)

Dimming:

0-10V dimming output, max 20mA sinking current

Operating Temperature:

-4°F to 122°F (-20°C to 50°C)

Storage Temperature:

-13°F - 158°F (-25°C - 70°C)

Operating Humidity:

5% - 93% without condensation

IP Rating:

IP20

Warm Up Time:

45s +/-5s

Standby (w):

<0.3W

Module Interaction:

Wire AWG 22 (Grey Dim -, Purple Dim +, Yellow 12V DC)

On-Time Adjustment:10s, 5min, 10min, 30min with +/-5% tolerance
(Factory Setting: 30min +/-5%)**Bi-Level:**0, 10%, 30%, 50% with +/-5% tolerance
(Factory Setting: 10%)**Debounce Time:**Day to Night: 5s
Night to Day: 30s**Open Circuit Protection:**


No

Short Circuit Protection :

Yes

Remote Control Accessory:Adjust settings using remote control (catalog# WSREM). Only available with 0-10V dimming driver options. [Remote control available here.](#)**Other****5-Year, No-Compromise Warranty:**RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

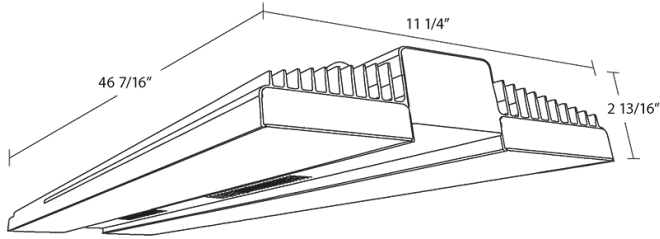

Features

- 100,000-Hour LED lifespan
- DLC Premium Listed
- 0-10V dimming, standard
- 5-Year, No-Compromise Warranty

Ordering Matrix

Family	Wattage (Length)	Color Temp	Driver	Options
RAIL	400	N		/PIR/E
	150 = 150W (20") 175 = 175W (23") 225 = 225W (31") 400 = 400W (46") 90 = 90W (13")	Blank = 5000K N = 4000K	Blank = 120-277V, 0-10V Dimming /480 = 480V, 0-10V Dimming	/MVS/E = Microwave Occupancy Sensor w/Battery Backup, 120-277V /PIR/E = Passive Infrared Sensor w/Battery Backup, 120-277V /LCS/E = Lightcloud Sensor w/Battery Backup, 120-277V ¹ /LC/E = Lightcloud w/Battery Backup, 120-277V ¹ /E = Battery Backup, 120-277V /MVS = Microwave Occupancy Sensor, 120-277V /PIR = Passive Infrared Sensor, 120-277V /LCS = Lightcloud Sensor, 120-277V /LC = Lightcloud, 120-480V Blank = No Option

¹ Available in 150W, 175W, 225W and 400W only