



## Technical Specifications (continued)

### Construction

---

**Cold Weather Starting:**

The minimum starting temperature is 32°F/0°C

**Maximum Ambient Temperature w/Battery****Backup:**

Suitable for use in up to 113°F (45°C)

**Lens:**

Polycarbonate lens

**Reflector:**

Polycarbonate

**IK Rating:**

IK08 Protected against 5 joules of impact. Equivalent to the impact of a 3.75 lbs. (1.7kg) mass dropped from 11.8" (300mm) above the impacted surface.

**Housing:**

Die-cast aluminum

**Gaskets:**

High-temperature silicone

**Finish:**

Formulated for high durability and long-lasting color

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

### Installation

---

**Mounting:**

Comes standard with V-hooks for chain mounting.

Accessories available for pendant and surface mounting (purchased separately).

### Other


---

**5-Year Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at

[rablighting.com/warranty](http://rablighting.com/warranty).

**Dimensions**

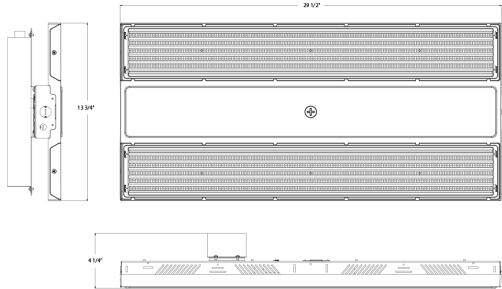

**Features**

- 100,000-Hour LED lifespan
- DLC Premium Listed
- 0-10V dimming, standard
- 5-Year, limited warranty

**Ordering Matrix**

Family	Wattage	Color Temp	Mounting	Finish	Driver	Battery Backup
RBAY15	L				/480	/E
	S = 130/100/80W M = 260/220/160W L = 400/320/260W	Blank = 3500/4000/5000K CCT Adjustable	Blank = V-Hook/Chain	Blank = White	Blank = 120-277V, 0-10V Dimming /480 = 480V, 0-10V Dimming	Blank = None /E = Battery Backup