

Technical Specifications (continued)

Lens:
Polycarbonate lens

Reflector:
Polycarbonate

IK Rating:
IK08 Protected against 5 joules of impact. Equivalent to the impact of a 3.75 lbs. (1.7kg) mass dropped from 11.8" (300mm) above the impacted surface.

Housing:
Die-cast aluminum

Gaskets:
High-temperature silicone

Finish:
Formulated for high durability and long-lasting color

Green Technology:
Mercury and UV free. RoHS-compliant components.


Installation

Mounting:
Comes standard with V-hooks for chain mounting. Accessories available for pendant and surface mounting (purchased separately).

Other

5-Year Limited Warranty:
The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

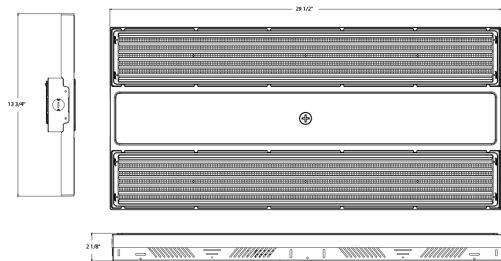

Features

- 100,000-Hour LED lifespan
- DLC Premium Listed
- 0-10V dimming, standard
- 5-Year, limited warranty

Ordering Matrix

| Family | Wattage | Color Temp | Mounting | Finish | Driver | Battery Backup |
|--------|--------------------------------------------------------------|-------------------------------------------|----------------------|---------------|---------------------------------------------------------------------|-------------------------------------|
| RBAY15 | L S = 130/100/80W M = 260/220/160W L = 400/320/260W | Blank = 3500/4000/5000K CCT Adjustable | Blank = V-Hook/Chain | Blank = White | Blank = 120-277V, 0-10V Dimming /480 = 480V, 0-10V Dimming | Blank = None /E = Battery Backup |