

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	320/260/200W
120V	2.70A/2.20A/1.70A	Color Temp	3500/4000/5000K
208V	1.60A/1.30A/1.00A	Color Accuracy	84-85 CRI
240V	1.40A/1.20A/0.95A	L70 Lifespan	100,000 Hours
277V	1.20A/1.10A/0.80A	Lumens	31,240-48,221 lm
Input Watts	196.8-322.5W	Efficacy	139.6-165.7 lm/W

Technical Specifications

Field Adjustability

Field Adjustable:

Field Adjustable Light Output:
320W/260W/200W (factory default 260W)
Color temperature selectable by 3500K, 4000K and 5000K (factory default 4000K)

Optical Field Adjustability:

55°, 85°, and 105° (factory default 85°)

Compliance

UL Listed:

Suitable for wet locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

DLC Listed:

This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at designlights.org to confirm the qualification status of a specific SKU prior to specification or purchase.

LED Characteristics

LEDs:

Long-life, high-efficiency, discrete, surface-mount LEDs

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Performance

Lifespan:

100,000-Hour LED lifespan based on IESIm-80 results and TM-21 calculations

Electrical

Driver:

Constant Current, Class 1, 120-277V, 50/60 Hz:
320W: 120V: 2.70A, 208V: 1.60A, 240V: 1.40A, 277V: 1.20A
260W: 120V: 2.20A, 208V: 1.30A, 240V: 1.20A, 277V: 1.10A
200W: 120V: 1.70A, 208V: 1.00A, 240V: 0.95A, 277V: 0.80A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

5.33% at 120V, 10.32% at 277V

Power Factor:

99.8% at 120V, 94.5% at 277V

Aux Power Supply:

Yes

Dim to Off:

Yes

Surge Protection:

6 kV + 6 kV

Construction

Cold Weather Starting:

The minimum starting temperature is -4°F (-20°C)

Maximum Ambient Temperature:

Suitable for use in up to 122°F (50°C)

Lens:

Polycarbonate lens

Housing:

Die-cast aluminum

Technical Specifications (continued)

Finish:
Formulated for high durability and long-lasting color

Green Technology:
Mercury and UV free. RoHS-compliant components.

Other


IP Rating:
Ingress protection rating of IP66 & IP69K for high-pressure and high temperature cleaning

5-Year Limited Warranty:
The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Installation

Mounting:
Comes standard with V-hooks for chain mounting. Accessories available for pendant and surface mounting (purchased separately).

Dimensions

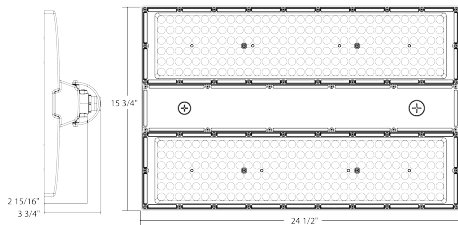

Features

- 100,000-Hour LED lifespan
- DLC Premium Listed
- 0-10V dimming, standard
- 5-Year, limited warranty

Ordering Matrix

Family	Wattage	Color Temp	Distribution	Finish	Driver
RBAY22	L				
	S = 160/130/100W M = 260/220/160W L = 320/260/200W	Blank = 3500/4000/5000K CCT Adjustable	Blank = 55°/85°/105° Adjustable Beam Angle	Blank = White	Blank = 120-277V, 0-10V Dimming /480 = 480V, 0-10V Dimming