


Project:	Type:	Prepared By:	Date:
-----------------	--------------	---------------------	--------------

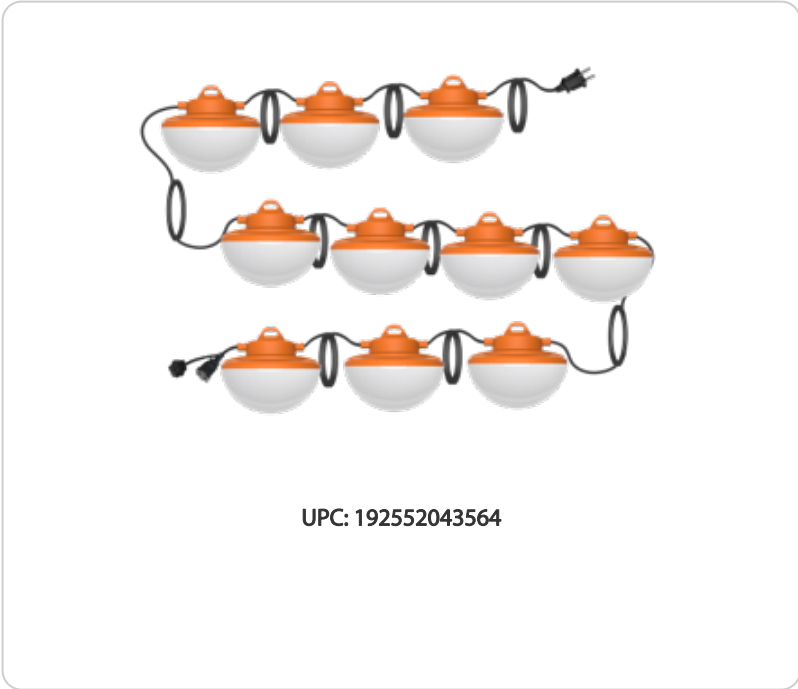

Features and Benefits

- Each LED bulb delivers 1200 lumens for a total of 12,000 lumens per fixture
- Durable 100ft. SPT-2W 18/2 AWG power cord, with integrated hanging hook on each lamp
- ANTI-UV protection for sun exposure and IP65 rated
- Linkable strands up to 400W; a total of 4 fixtures
- 120V AC input voltage

Technical Specifications		
Performance <hr/> Product Type: LED Temporary String Light Description: Upgrade traditional work lights with efficient, portable LED string lights. Wattage Equivalency: 300W Incandescent Input Wattage: 100W Lumens: 12,000lm Efficacy: 120lm/W L70 Lifespan: 50,000-Hour LED lifespan based on IES LM-70 results	Power Factor: 0.5 Dimmable: No Input Voltage: 120V Operating Frequency: 60 Hz Input Current @ 120V (mA): 1,430mA Operating Temperature: -40°F to 104°F (-40°C to -40°C) Flicker: 30% Sensor Settings <hr/> Surge Protection: 1 kV	LED Characteristics <hr/> Beam Angle: 120° Color Temperature: 5000K Color Accuracy (CRI): >80 CRI Color Consistency: <7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color
Electrical <hr/> Driver: Constant Current	Installation <hr/> Mounting: Integrated hanging hook Base Type: SPT-2W 18/2AWG power cord, high-impact design ANSI 2-prong plug and receptacle with weatherproof cover. No ground required; housing is made of polycarbonate material	Linkable: Linkable strands up to 400W

Technical Specifications (continued)**Construction****Lamp Shape:**

Oval lamp with frosted lens

Finish:

Orange

Enclosure Material:

Constructed from frosted, shatter-resistant polycarbonate

Compliance**ETL Listed:**

This product has been tested by Intertek and found in compliance with accepted national standards.

Environment:

Suitable for use indoors and outdoors in dry, damp, or wet environments.

Fixture Rating:

Suitable for use in enclosed fixtures.
Suitable for use in open fixtures.

IP Rating:

IP65

Energy Star Approved:

No

DLC Listed:

This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at [designlights.org](https://www.designlights.org) to confirm the qualification status of a specific SKU prior to specification or purchase.

Certification Model Number:

STRING17-100

California Title 20 Compliant:

No

California Title 24 JA8 Compliant:

No

California Energy Commission (CEC) Status:

Lawful for Sales in California

NSF Listed:

No

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15 of the FCC Rules

Other**3-Year Limited Warranty:**

The RAB 3-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	2	17.17	17.17	6.3
PALLET	72	53.15	35.43	47.24

Dimension

