

Technical Specifications (continued)

Lens:

Frosted polystyrene

Housing:

Cold Rolled Carbon Steel Sheets and Strip (SPCC)

Finish:

White

Green Technology:

Mercury and UV free. RoHS-compliant components.

Installation

Mounting:

Recessed into T-grid ceiling. Surface and recessed mounting kits available for drywall ceilings.

Other

5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Compatible Accessories:

RMKEZPAN[2X2][1X4][2X4]

Recessed mounting kit


SMKEZPAN[2X2][1X4][2X4]

Surface mounting kit

EMB-[9][15][25]

0-10V Dimmable 120-347V emergency driver

Dimensions

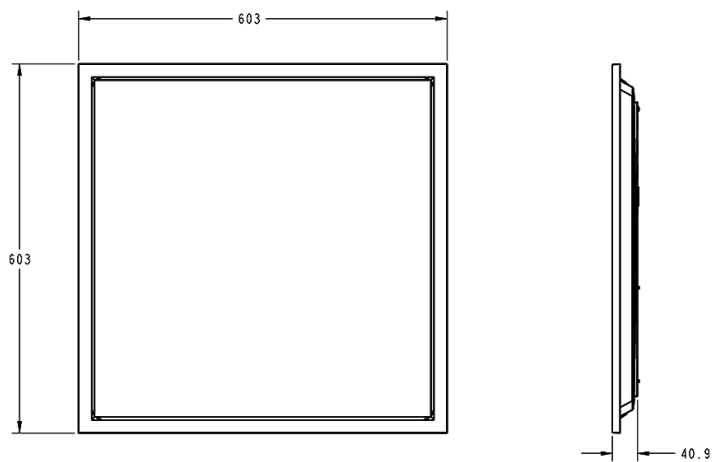

Features

- 0-10V dimming
- 50,000-Hour LED lifespan
- 5-Year, limited warranty
- 4 per case, must order in case quantity increments

Ordering Matrix

Family		Size/Wattage	Color Temp	Finish	Driver	Options
T34FA	-	2X2				
		2X2 = 2' x 2' 40/30/20W 1X4 = 1' x 4' 40/30/20W 2X4 = 2' x 4' 50/40/30W	Blank = 3500/4000/5000K	Blank = White	Blank = 0-10V Dimming, 120-277V	Blank = No Option /LC = Lightcloud /MVS = Microwave Occupancy Sensor /E = Battery Backup