



## Technical Specifications (continued)

### Construction

#### Cold Weather Starting:

The minimum starting temperature is -4°F (-20°C)

#### Maximum Ambient Temperature:

Suitable for use in up to 104°F (40°C)

#### Lens:

Frosted polystyrene

#### Housing:

Cold Rolled Carbon Steel Sheets and Strip (SPCC)

#### Finish:

White

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

### Installation

#### Mounting:


Recessed into T-grid ceiling. Surface and recessed mounting kits available for drywall ceilings.

### Other

#### 5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

## Dimensions

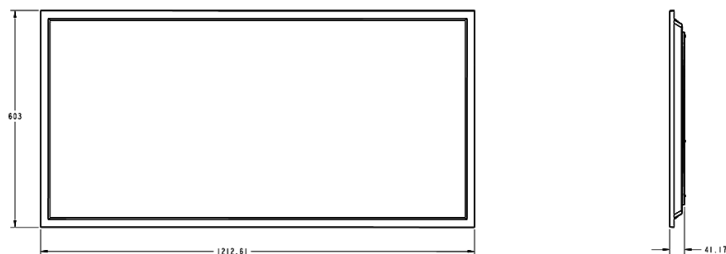

## Features

- 0-10V dimming
- 50,000-Hour LED lifespan
- 5-Year, limited warranty
- 2 per case, must order in case quantity increments

## Ordering Matrix

Family		Size/Wattage	Color Temp	Finish	Driver	Options
T34FA	-	2X4				/E
		<b>2X2</b> = 2' x 2' 40/30/20W <b>1X4</b> = 1' x 4' 40/30/20W <b>2X4</b> = 2' x 4' 50/40/30W	<b>Blank</b> = 3500/4000/5000K	<b>Blank</b> = White	<b>Blank</b> = 0-10V Dimming, 120-277V	<b>Blank</b> = No Option /LC = Lightcloud /MVS = Microwave Occupancy Sensor /E = Battery Backup