

Project:	Type:	Prepared By:	Date:
-----------------	--------------	---------------------	--------------



Features and Benefits

- Replacement for conventional fluorescent T8 and T12 linear tubes
- Dedicated External driver must be paired together with RAB tubes
- Can be installed using single ended or double ended wiring method
- Works with non-shunted sockets AND shunted sockets.
- 50,000 hour Lifespan
- Rated for use in enclosed and open fixtures in dry or damp locations
- Diffused frosted lens will maintain the same light quality over time
- Instant on full brightness
- Low Flicker less than 1%
- UL Classified, DLC Listed

Technical Specifications		
Performance <hr/> Product Type: Linear Input Wattage: 11W Lumens: 1,800lm Efficacy: 163lm/W L70 Lifespan: 50,000 Hours Construction <hr/> Material: Glass Shape: T8 Nominal Length: 3 ft	Finish: Frosted For Use Outdoors in Open Fixtures: No LED Characteristics <hr/> Color Temperature: 5000K Daylight Color Accuracy (CRI): 80 CRI Beam Angle: 220° Installation <hr/> Base Type: G13, Medium Bipin Installation Type: Type C, External Driver Electrical <hr/> THD: <25%	Power Factor: >0.9 Operating Frequency: 50/60Hz Dimming: Yes with 0-10V dimmer. See Dimmer Compatibility List. Input Voltage: 120-277V AC Flicker: Depends on Type C Driver Compliance <hr/> UL Listed: Suitable for damp locations. Suitable for use in enclosed fixtures. NSF Listed: Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones. Tube guard required in open fixtures.

Technical Specifications (continued)

Certification Model Number:

T10103

California Energy Commission (CEC) Status:

Lawful for Sales in California

Application:

Suitable for damp locations and totally enclosed fixtures.

DLC Listed:


This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at designlights.org to confirm the qualification status of a specific SKU prior to specification or purchase.

Case and Pallet Dimensions


	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	24	7.1	5.1	38
PALLET	1008	46.5	40.6	43.5

Wiring Diagram

Double Ended

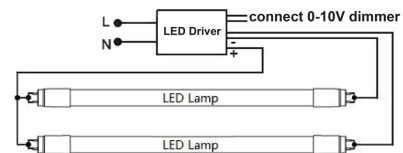

Single Ended

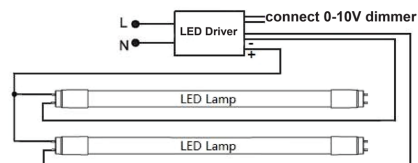

Dimension

