



Color: White

Weight: 2.5 lbs

Project:

Type:

Prepared By:

Date:

**Driver Info**

Type	Constant Current
120V	0.33A
208V	N/A
240V	N/A
277V	N/A
Input Watts	19.4-32.3W

**LED Info**

Watts	30/25/20W
Color Temp	2700/3000/3500/4000/5000K
Color Accuracy	94-98 CRI
L70 Lifespan	100,000 Hours
Lumens	1840-3124 lm
Efficacy	86.7-116.5 lm/W

**Technical Specifications****Field Adjustability****Field Adjustable:**

Field Adjustable Light Output:  
30/25/20W (factory default 30W)  
Color temperature selectable 2700K, 3000K, 3500K, 4000K and 5000K (factory default 4000K)  
Beam angle selectable by 15°, 20°, 30°, 40°, and 55° (factory default 55°)

**Compliance****UL Listed:**

Suitable for dry locations

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**IP Rating:**

Ingress protection rating of IP20 for protection against solid objects larger than 12.5mm

**DLC Listed:**

This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at [designlights.org](http://designlights.org) to confirm the qualification status of a specific SKU prior to specification or purchase.

**Performance****Lamp Type:**

Track Light

**Lifespan:**

100,000-Hour LED lifespan based on IESIm-80 results and TM-21 calculations

**Construction****IK Rating:**

IK06 Protected against 1 joules of impact. Equivalent to the impact of a 0.55 lbs. (.25kg) mass dropped from 15.8" (400mm) above the impacted surface.

**Cold Weather Starting:**

The minimum starting temperature is -4°F (-20°C)

**Maximum Ambient Temperature:**

Suitable for use in up to 104°F (40°C)

**Housing:**

Aluminum

**Lens:**

Polymethyl Methacrylate (PMMA)

**Number of Heads:**

1

**Finish:**

Formulated for high durability and long-lasting color

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

**Electrical****Driver:**

Constant Current, Class 1, 120V, 60 Hz, 120V: 0.33A

**Dimming Driver:**

120V TRIAC Dimmers

**Surge Protection:**

L-N:2.5 kV, LN-PE 2.5 kV

**Aux Power Supply:**

No

## Technical Specifications (continued)

### Dim to Off:

No

### Installation

#### Mounting:

Track mount. Compatible with RAB Track System and accessories.

### LED Characteristics

#### LEDs:

Long-life, high-efficacy, COB (Chip on Board) LEDs

#### Color Uniformity:


RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Other

#### 5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

## Dimensions

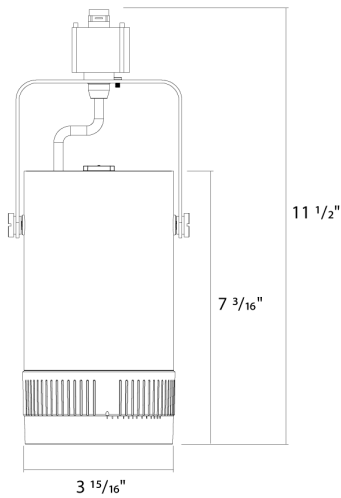

## Features

- 100,000-Hour LED lifespan
- DLC Listed
- TRIAC dimming
- 120V
- Dry location only
- 5-Year, limited warranty

Ordering Matrix

Family	Wattage	Mount	Color Temp	Optics	Finish	Driver
TK22	L S = 8/6/4W M = 20/15/10W L = 30/25/20W	Blank = H-Track Mount	Blank = 2700/3000/3500/4000/5000K CCT Adjustable	Blank = 15-55° Adjustable	Blank = White B = Black	Blank = 120V, TRIAC Dimming