



Color: Black

Weight: 1.7 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current
120V	0.22A
208V	N/A
240V	N/A
277V	N/A
Input Watts	9.3-20.6W

LED Info

Watts	20/15/10W
Color Temp	2700/3000/3500/4000/5000K
Color Accuracy	92-99 CRI
L70 Lifespan	100,000 Hours
Lumens	948-2053 lm
Efficacy	81.9-119.9 lm/W

Technical Specifications**Field Adjustability****Field Adjustable:**

Field Adjustable Light Output:
20/15/10W (factory default 20W)
Color temperature selectable 2700K, 3000K, 3500K, 4000K and 5000K (factory default 4000K)
Beam angle selectable by 15°, 20°, 30°, 40°, and 55° (factory default 55°)

Compliance**UL Listed:**

Suitable for dry locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

IP Rating:

Ingress protection rating of IP20 for protection against solid objects larger than 12.5mm

DLC Listed:

This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at designlights.org to confirm the qualification status of a specific SKU prior to specification or purchase.

Performance**Lamp Type:**

Track Light

Lifespan:

100,000-Hour LED lifespan based on IESIm-80 results and TM-21 calculations

Construction**IK Rating:**

IK06 Protected against 1 joules of impact. Equivalent to the impact of a 0.55 lbs. (.25kg) mass dropped from 15.8" (400mm) above the impacted surface.

Cold Weather Starting:

The minimum starting temperature is -4°F (-20°C)

Maximum Ambient Temperature:

Suitable for use in up to 104°F (40°C)

Housing:

Aluminum

Lens:

Polymethyl Methacrylate (PMMA)

Number of Heads:

1

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Electrical**Driver:**

Constant Current, Class 1, 120V, 60 Hz, 120V: 0.22A

Dimming Driver:

120V TRIAC Dimmers

Surge Protection:

L-N:2.5 kV, LN-PE 2.5 kV

Aux Power Supply:

No

Technical Specifications (continued)

Dim to Off:

No

Installation**Mounting:**

Track mount. Compatible with RAB Track System and accessories.

LED Characteristics**LEDs:**


Long-life, high-efficacy, COB (Chip on Board) LEDs

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Other**5-Year Limited Warranty:**The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

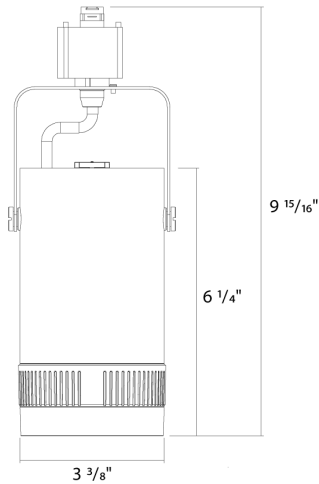

Features

- 100,000-Hour LED lifespan
- DLC Listed
- TRIAC dimming
- 120V
- Dry location only
- 5-Year, limited warranty

Ordering Matrix

Family	Wattage	Mount	Color Temp	Optics	Finish	Driver
TK22	M S = 8/6/4W M = 20/15/10W L = 30/25/20W	Blank = H-Track Mount	Blank = 2700/3000/3500/4000/5000K CCT Adjustable	Blank = 15-55° Adjustable	B Blank = White B = Black	Blank = 120V, TRIAC Dimming