



Color: White

Weight: 3.7 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

| Type        | Constant Current  |
|-------------|-------------------|
| 120V        | 0.26A/0.20A/0.13A |
| 208V        | 0.00A/0.00A/0.00A |
| 240V        | 0.00A/0.00A/0.00A |
| 277V        | 0.00A/0.00A/0.00A |
| Input Watts | 15.8-30.7W        |

LED Info

|                |                               |
|----------------|-------------------------------|
| Watts          | 30/22/15W                     |
| Color Temp     | 2700K/3000K/3500K/4000K/5000K |
| Color Accuracy | 93-95 CRI                     |
| L70 Lifespan   | 100,000 Hours                 |
| Lumens         | 2339-4127 lm                  |
| Efficacy       | 127.1-155.3 lm/W              |

Technical Specifications

Field Adjustability

Field Adjustable:

Field Adjustable Light Output:  
30/22/15W (factory default 30W)  
Color Temperature Selectable:  
2700K, 3000K, 3500K, 4000K and 5000K (factory default 4000K)

Compliance

UL Listed:

Suitable for dry locations

IP Rating:

IP20

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Color Temperature:

2700/3000/3500/4000/5000K CCT Adjustable

Electrical

Driver:

Constant Current, Class 1, 120V, 60 Hz, 120V  
30W: 0.28A  
22W: 0.20A  
15W: 0.14A

Dimming Driver:

120V TRIAC Dimmers

Aux Power Supply:

No

Dim to Off:

No

Surge Protection:

Ring Wave L-N:2.5 kV, LN-PE 2.5 kV

Construction

Cold Weather Starting:

The minimum starting temperature is -4°F (-20°C)

Maximum Ambient Temperature:

Suitable for use in up to 104°F (40°C)

Lens:

Polycarbonate lens

Housing:

Aluminum

Finish:

Formulated for high durability and long-lasting color

Performance

Lifespan:

100,000-Hour LED lifespan based on IESlm-80 results and TM-21 calculations

Installation

Mounting:

H-Track Mount

Optical

Optics:


90°

Other

5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

Dimensions

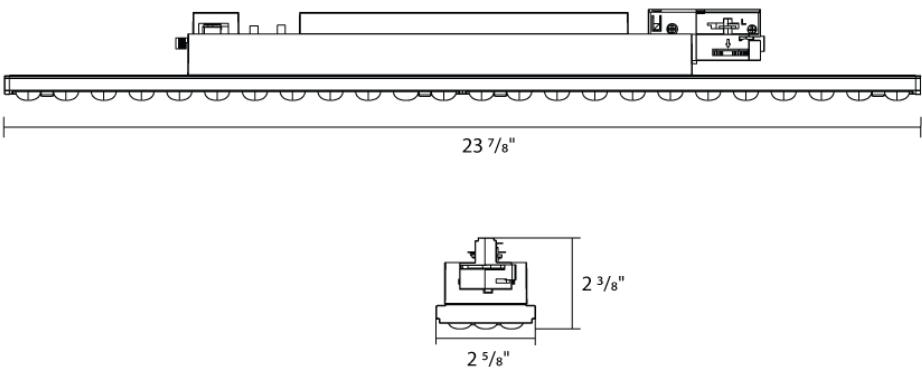

Ordering Matrix

| Family | Size/Wattage                                 | Mounting              | Color Temp                        | Optics      | Finish                     | Driver                      |
|--------|----------------------------------------------|-----------------------|-----------------------------------|-------------|----------------------------|-----------------------------|
| TKBEAM | 2                                            |                       |                                   |             |                            |                             |
|        | 2 = 2 ft (30/22/15W)<br>4 = 4 ft (60/50/40W) | Blank = H-Track Mount | Blank = 2700/3000/3500/4000/5000K | Blank = 90° | Blank = White<br>B = Black | Blank = 120V, TRIAC Dimming |