

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Voltage	Watts	4.27W/FTW
120V	5 mA/LED	Color Temp	90
208V	N/A	Color Accuracy	N/A
240V	N/A	L70 Lifespan	N/A
277V	N/A	Lumens	205 lm/ft lm
Input Watts	4.27W/ftW	Efficacy	48

Technical Specifications

<p>Performance</p> <p>Product Type: Dual Flex Silicone Wet Rated Neon Tape Light Static White</p> <p>Lumens: 205lm/ft±10%</p> <p>Efficacy: 48lm/W±10%</p> <p>L70 Lifespan: 50,000-Hour LED lifespan based on IES LM-70 results</p> <p>Electrical</p> <p>Dimmable: PWM Dimming Signal, dimmable down to .1% with LED Driver (sold separately)</p> <p>Input Voltage: DC24V</p> <p>Operating Temperature: -4°F to 113°F (-20°C to 45°C)</p> <p>LED Characteristics</p> <p>Beam Angle: 120°</p>	<p>Color Temperature: 3000K</p> <p>Color Accuracy (CRI): 90 CRI</p> <p>R9 Value: High color performance with R9 greater than 50</p> <p>Certification Model Number: <5-step (2700K & 5000K);<7-step (3000/3500/4000K) MacAdam Ellipse binning to achieve consistent fixture-to-fixture color</p> <p>Installation</p> <p>Field Cuttable Increment: Can be cut at any length</p> <p>Mounting: Easy installation with clips, fixed channel, and bendable channel (sold separately)</p> <p>Construction</p> <p>Length: 16.4 ft</p> <p>Max Linkable Run: 32.8 ft</p>	<p>PCB Width: Width: 16mm Height: 16mm</p> <p>Light Source: COB LED White</p> <p>Material Construction: Dual-Flex design which can be used to create curved and complex irregular designs</p> <p>Light Effect: Soft linear lighting performance</p> <p>Compliance</p> <p>Listings: UL2108</p> <p>Environment: Suitable for use indoors and outdoors in dry, damp, or wet environments.</p> <p>IP Rating: IP67</p> <p>California Title 24 JA8 Compliant: Can be used to conform with the requirements of California Title 24 Part 6.</p> <p>California Energy Commission (CEC) Status: Lawful for Sales in California</p>
--	--	--

Technical Specifications (continued)

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15 of the FCC Rules

Other

Mounting Accessories:

TAP16

16mm wide aluminum straight channel

TB16

16mm wide mounting brackets

TBB16

16mm wide bendable aluminum channel

Compatible Drivers:

TID-60

Indoor 60W driver

TID-96

Indoor 96W driver


TOD-96

Outdoor 96W driver

5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

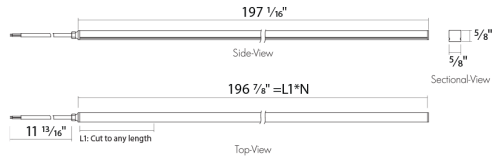

Features

- Non-pixelated light diffusion enables the product to be freely bent in any direction, vertically or horizontally
- Field-cuttable for shorter runs with a max run of 32ft. Can be linked with connectors (sold separately)
- Easy installation with clips, fixed channel, and bendable channel (sold separately)
- Slim silicone construction with 6" minimum bending radius
- Indoor or outdoor rated drivers available (sold separately)
- 50,000-hr rated life, Title 24 Compliant, and 5-year limited warranty

Ordering Matrix

Family	CRI/Color Temp	Input Voltage	IP Rating	Option
TNF	Y			
	Blank = 90 CRI, Tunable Color Temperature Y = 90 CRI, 3000K	Blank = 24V DC	Blank = IP67, Indoor/Outdoor	Blank = None /LCB = Lightcloud Blue /RGB = 16+ million colors w/Lightcloud Blue