

Color: White

Weight: 17.9 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	72W
120V	0.60A	Color	3000/3500/4000/5000K
208V	0.35A	Temp	
240V	0.30A	Color Accuracy	84 CRI
277V	0.26A	L70 Lifespan	100,000 Hours
Input Watts	46.1-94.2W	Lumens	5736-12028 lm
		Efficacy	122.8-127.7 lm/W

## Technical Specifications

### Compliance

**UL Listed:**

Suitable for damp locations

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**DLC Listed:**

This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at [designlights.org](http://designlights.org) to confirm the qualification status of a specific SKU prior to specification or purchase.

### Electrical

**Driver:**

48W: Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.40A, 208V: 0.23A, 240V: 0.20A, 277V: 0.18A  
 72W: Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.60A, 208V: 0.35A, 240V: 0.30A, 277V: 0.26A  
 96W: Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.80A, 208V: 0.47A, 240V: 0.40A, 277V: 0.35A

**Dimming Driver:**

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 5%.

**THD:**

5.6% at 120V, 11.7% at 277V

**Power Factor:**

99.7% at 120V, 96.9% at 277V

**Surge Protection:**

1-2 kV

**Battery Backup:**

Battery backup will operate the fixture for 90 minutes if power fails. Wired for 120-277V.

**Battery Backup Light Loss Factor:**

48W: 0.36  
 72W: 0.24  
 96W: 0.19

### Performance

**Lifespan:**

100,000-Hour LED lifespan based on IESIm-80 results and TM-21 calculations

**Wattage Equivalency:**

48W: Replaces up to (2) F32T8 or (1) F96T8  
 72W: Replaces up to (4) F32T8 or (2) F96T8  
 96W: Replaces (5) F32T8 or (2) F96T8

### LED Characteristics

**LEDs:**

Long-life, high-efficiency, surface-mount LEDs

**Color Consistency:**

4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Construction

**Cold Weather Starting:**

The minimum starting temperature is -4°F (-20°C)

**Maximum Ambient Temperature:**

Suitable for use in up to 122°F (50°C)

**Housing:**

Cold Rolled Carbon Steel Sheets and Strip (SPCC)

**Lens:**

Diffused Polymethyl Methacrylate (PMMA)

**Finish:**

Formulated for high durability and long-lasting color

**Technical Specifications (continued)**

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

**Installation**

**Mounting:**

Comes standard with two mounting accessories: aircraft cable for secure, suspended mounts and a stainless bracket for easy mounting to junction boxes. Power cord and canopy cover included.

**Other**

**Lighting Pattern:**

70% downlight, 30% uplight


**Accessories:**

Fixture to fixture connector: [TOMO CONNECT](#)

**5-Year, No-Compromise Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Dimensions**

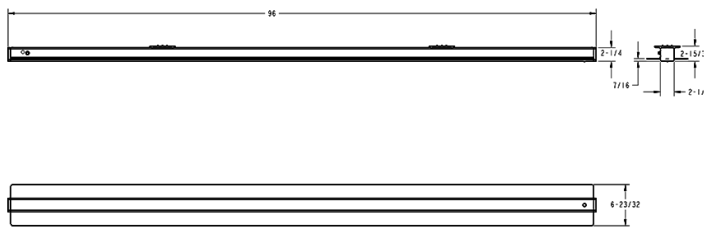

**Features**

- 0-10V dimming
- 100,000-Hour LED lifespan
- 5-Year, No-Compromise Warranty

Ordering Matrix

Family	Length (Wattage)	Color Temp	Finish	Driver	Controls	Battery Backup
TOMO	- 8 2 = 2' (24/18/12W) 4 = 4' (48/36/24W) 8 = 8' (96/72/48W)	Blank = 3000/3500/4000/5000K CCT Adjustable	Blank = White	Blank = 120-277V, 0-10V Dimming	Blank = No Option /PIR = Passive Infrared Occupancy Sensor /LC = Lightcloud /LCS = Lightcloud Sensor /LCB = Lightcloud Blue /LCBS = Lightcloud Blue w/PIR sensor /LCBS/MVS = Lightcloud Blue w/MVS sensor	/E Blank = None /E = Battery Backup

<sup>1</sup> \*Available only for 4' and 8'