



Color: Bronze

Weight: 32.9 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant	Watts	500/450/420/380W
120V	N/A	Color Temp	3000/4000/5000K
208V	N/A	Color Accuracy	82-83 CRI
240V	N/A	L70 Lifespan	100,000 Hours
277V	N/A	Lumens	53,464-74,455 lm
Input Watts	368.9-493.6W	Efficacy	134.8-159.4 lm/W

**Technical Specifications**

**Field Adjustability**

**Optical Field Adjustability:**  
90°, 75° and 55°

**Field Adjustable:**

Field Adjustable Light Output:  
500W/460W/420W/380W (factory default 500W)  
Color Temperature Selectable:  
3000K, 4000K and 5000K (factory default 4000K)

**Compliance**

**UL Listed:**

Suitable for wet locations

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**IP Rating:**

Ingress protection rating of IP65 for dust and water

**DLC Listed:**

This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at [designlights.org](http://designlights.org) to confirm the qualification status of a specific SKU prior to specification or purchase.

**Electrical**

**Driver:**

500W: Constant Current, Class 1, 480V, 50/60Hz, 480V: 1.09A

450W: Constant Current, Class 1, 480V, 50/60Hz, 480V: 0.96A

420W: Constant Current, Class 1, 480V, 50/60Hz, 480V: 0.91A

380W: Constant Current, Class 1, 480V, 50/60Hz, 480V: 0.83A

**Dimming Driver:**

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

**THD:**

4.19% at 480V

**Power Factor:**

96.5% at 480V

**Surge Protection:**

L/N-PE: 2.5 kV, L-N: 2.5 kV

**Photocell:**

480V Twistlock photocell included. Photocell is only compatible with 480V.

**Shorting Cap:**

Shorting Cap included for Twistlock Receptacle

**LED Characteristics**

**LEDs:**

Long-life, high-efficacy, surface-mount LEDs

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

**Color Consistency:**

3000K & 5000K: 5-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color  
4000K: 7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

## Technical Specifications (continued)

### Performance

---

**Lifespan:**

100,000-Hour LED lifespan based on IESlm-80 results and TM-21 calculations

**Performance Data:**

[Click here for the X22-500 performance data](#)

**Wattage Equivalency:**

500W: Replaces up to 2000W Metal Halide (MH) or 1500W High Pressure Sodium (HPS)

450W: Replaces up to 2000W Metal Halide (MH) or 1500W High Pressure Sodium (HPS)

420W: Replaces up to 2000W Metal Halide (MH) or 1500W High Pressure Sodium (HPS)

380W: Replaces up to 1500W Metal Halide (MH) or 1000W High Pressure Sodium

### Construction

---

**Cold Weather Starting:**

The minimum starting temperature is -22°F (-30°C)

**Maximum Ambient Temperature:**

Suitable for use in up to 122°F (50°C)

**Housing:**

Die-cast aluminum

**Lens:**

Tempered glass

**Effective Projected Area (EPA):**

1 Fixture: 1.142 ft<sup>2</sup>

2 Fixtures at 90°: 2.712 ft<sup>2</sup>

2 Fixtures at 180°: 2.285 ft<sup>2</sup>

3 Fixtures at 90°: 3.854 ft<sup>2</sup>

4 Fixtures at 90°: 3.854 ft<sup>2</sup>

**Finish:**

Formulated for high durability and long-lasting color

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

### Installation

---

**Mounting:**

Slipfitter with tilt angle in 10° increments. Trunnion kit is included.


### Other

---

**5-Year Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

## Dimensions

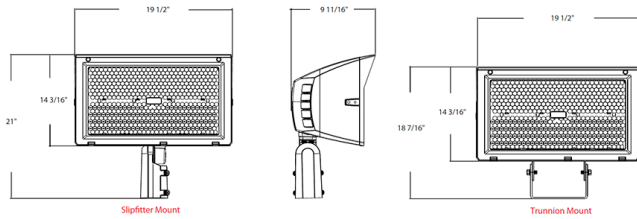

## Features

- DLC Premium listed
- IP65 Rated
- 100,000-Hour LED lifespan
- 5-Year, limited warranty

## Ordering Matrix

Family	Wattage	Color Temp	Mounting	Finish	Beam Angle	Driver	Options
X22	-	500	Blank			/480	
	35 = 35/30/25/20W 60 = 60/50/40/30W 80 = 80/70/60/50W 150 = 150/125/100/75W 250 = 250/220/190/160W 320 = 320/280/240/200W 420 = 420/380/340/300W 500 = 500/450/420/380W 20 = 20/17/13/10W	Blank = 3000/4000/5000K CCT Adjustable	Blank = Knuckle Mount Installed with Yoke Kit Included Blank = Knuckle Mount Installed with Trunnion Kit Included Blank = Slipfitter Mount Installed with Trunnion Kit Included	Blank = Bronze W = White	Blank = Selectable Beam Angle (55/75/90°)	Blank = 120-277V /480 = 480V, 0-10V Dimming	Blank = Selectable On/Off Photocell

*X22-20 & X22-35: Knuckle mount installed with yoke mount included.*

*X22-60 & X22-80: Knuckle mount installed with trunnion mount included.*

*X22-150-500: Slipfitter mount installed with trunnion mount included. 480V only available in 150W-500W.*