



Color: Bronze

Weight: 5.5 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant	Watts	80/70/60/50W
120V	0.66A	Color Temp	3000/4000/5000K
208V	0.40A	Color Accuracy	81-84 CRI
240V	0.35A	L70 Lifespan	100,000 Hours
277V	0.32A	Lumens	7,193-12,772 lm
Input Watts	50.5-83W	Efficacy	127.6-171 lm/W

**Technical Specifications**

**Field Adjustability**

**Optical Field Adjustability:**  
90°, 75° and 55°

**Field Adjustable:**

Field Adjustable Light Output:  
80W/70W/60W/50W (factory default 80W)  
Color Temperature Selectable:  
3000K, 4000K and 5000K (factory default 4000K)

**Compliance**

**UL Listed:**

Suitable for wet locations

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**IP Rating:**

Ingress protection rating of IP65 for dust and water

**DLC Listed:**

This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at [designlights.org](http://designlights.org) to confirm the qualification status of a specific SKU prior to specification or purchase.

**Electrical**

**Driver:**

80W: Class 1, Constant Current, 120-277V, 50/60 Hz, 120V: 0.66A, 208V: 0.40A, 240V: 0.35A, 277V: 0.32A

70W: Class 1, Constant Current, 120-277V, 50/60 Hz, 120V: 0.58A, 208V: 0.35A, 240V: 0.31A, 277V: 0.28A

60W: Class 1, Constant Current, 120-277V, 50/60 Hz, 120V: 0.51A, 208V: 0.31A, 240V: 0.28A, 277V: 0.26A

50W: Class 1, Constant Current, 120-277V, 50/60 Hz, 120V: 0.44A, 208V: 0.26A, 240V: 0.24A, 277V: 0.22A

**Dimming Driver:**

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

**THD:**

8.71% at 120V, 5.57% at 277V

**Power Factor:**

88.9% at 120V, 99.4% at 277V

**Surge Protection:**

L/N-PE: 6 kV, L-N: 6 kV

**Photocell:**

Integrated photocell included with on/off switch

**LED Characteristics**

**LEDs:**

Long-life, high-efficacy, surface-mount LEDs

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

**Color Consistency:**

3000K & 5000K: 5-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color  
4000K: 7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

## Technical Specifications (continued)

### Performance

---

**Lifespan:**

100,000-Hour LED lifespan based on IESlm-80 results and TM-21 calculations

**Performance Data:**

[Click here for the X22-80 performance data](#)

### Construction

---

**Cold Weather Starting:**

The minimum starting temperature is -22°F (-30°C)

**Maximum Ambient Temperature:**

Suitable for use in up to 122°F (50°C)

**Housing:**

Die-cast aluminum

**Lens:**

Tempered glass

**Effective Projected Area (EPA):**

1 Fixture: 0.249 ft<sup>2</sup>

2 Fixtures at 90°: 0.587 ft<sup>2</sup>

2 Fixtures at 180°: 0.498 ft<sup>2</sup>

3 Fixtures at 90°: 0.836 ft<sup>2</sup>

4 Fixtures at 90°: 0.836 ft<sup>2</sup>

**Finish:**

Formulated for high durability and long-lasting color

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

### Installation

---

**Mounting:**

Robust knuckle mount with 180° adjustable swivel arm. Tilt angle in 10° increments. Trunnion kit is included.


### Other

---

**5-Year Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

Dimensions

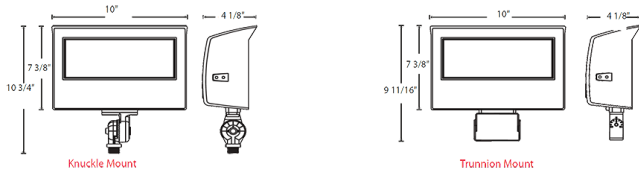

Features

- DLC Premium listed
- IP65 Rated
- 100,000-Hour LED lifespan
- 5-Year, limited warranty

Ordering Matrix

Family	Wattage	Color Temp	Mounting	Finish	Beam Angle	Driver	Options
X22	-	80	Blank				
	35 = 35/30/25/20W 60 = 60/50/40/30W 80 = 80/70/60/50W 150 = 150/125/100/75W 250 = 250/220/190/160W 320 = 320/280/240/200W 420 = 420/380/340/300W 500 = 500/450/420/380W 20 = 20/17/13/10W	Blank = 3000/4000/5000K CCT Adjustable	Blank = Knuckle Mount Installed with Yoke Kit Included Blank = Knuckle Mount Installed with Trunnion Kit Included Blank = Slipfitter Mount Installed with Trunnion Kit Included	Blank = Bronze W = White	Blank = Selectable Beam Angle (55/75/90°)	Blank = 120-277V /480 = 480V, 0-10V Dimming	Blank = Selectable On/Off Photocell

X22-20 & X22-35: Knuckle mount installed with yoke mount included.  
 X22-60 & X22-80: Knuckle mount installed with trunnion mount included.  
 X22-150-500: Slipfitter mount installed with trunnion mount included. 480V only available in 150W-500W.