

Photometric Test Report

Relevant Standards

- IES LM-79-2008
- ANSI C82.77:2017

Prepared For RAB Lighting Inc.

Room 6A33, No.1388, Wuzhong road, Shanghai, China

Xiao Xiang, 15921313292, Gary.Xiao@rabweb.com

Prepared By

Deliver Co., Ltd.

Block 11, 78 Keling Road, SSTP, Suzhou, China

0512-66801950, kevin.jia@szdeliver.com

Project Number

DLF2111113

Report Number

DLF2111113-2a


Test Date

2021/11/24

Issue Date


2021/12/1

Prepared By



Wangzun Zhu

Approved By



Kevin Jia

The results contained in this report pertain only to the tested sample.

This report shall not be reproduced, except in full, without written approval of Deliver Co., Ltd.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP.

1.0 Test Summary

DLC Technical Requirements v5.1

Outdoor - Pole/Arm-Mounted Area and Roadway Luminaires				
Requirement Category	Test Method	Requirements		Test value
Luminaire Output (lm) (Goniophotometer - Section 4.2)	IES LM-79-2008	1000		37050
Minimum Luminaire Efficacy (lm/W) (Goniophotometer - Section 4.2)	IES LM-79-2008	Standard 105	Premium 120	138.1
Power (Input Wattage) (W) (Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		268.2
Total Harmonic Distortion (A%) (THD & PF - section 4.3)	ANSI C82.77:2014	20.00%	120V	1.83%
		20.00%	277V	4.23%
Power Factor (THD & PF - section 4.3)	ANSI C82.77:2014	0.9	120V	0.999
		0.9	277V	0.966
Allowable CCTs* (K) (Integrating Sphere - Section 4.1)	IES LM-79-2008	7 step	3985±275	3918
		4 step	3985±154	
Minimum CRI (Integrating Sphere - Section 4.1)	IES LM-79-2008 CIE 13.3-1995	≥70		83
Minimum R9 (Integrating Sphere - Section 4.1)	IES LM-79-2008 CIE 13.3-1995	≥-40		6
Minimum Rf (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥70		84
Minimum Rg (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥89		95
Minimum IES Rcs,h1 (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	-18% ≤ IES Rcs,h1 ≤ +23%		-12%
Zonal Lumen Requirement (0°-90°) (Goniophotometer - Section 4.2)	IES LM-79-2008	100%		100.00%
Zonal Lumen Requirement (80°-90°) (Goniophotometer - Section 4.2)	IES LM-79-2008	≤10%		0.72%
Input Voltage (V)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		120
(Goniophotometer - Section 4.2)		Non-Worst Case		277
Input Current (A)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		2.240
(Goniophotometer - Section 4.2)		Non-Worst Case		0.970
Power (Input Wattage - W)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		268.2
(Goniophotometer - Section 4.2)		Non-Worst Case		258.4

2.0 Test List

Test Item	Test	Test Date	Model Number	Sample No.
1	Integrating Sphere Test	2021/11/24	ALEDL3TN	B1
2	Goniophotometer Test	2021/11/24	ALEDL3TN	B1
3	THD and PF Test	2021/11/24	ALEDL3TN	B1

Remark(If any)

- 1、 This report shall not be used by the client to claim product endorsement by NVLAP, NIST or any agency of the US government.
- 2、 The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.


3.0 Production Description

Luminaire Description: ALEDL3TN

Description: 260W/36,000 lm @ 4000K

Electrical Specification: 120V-277V,50/60HZ

Photos of Luminaire Characteristics

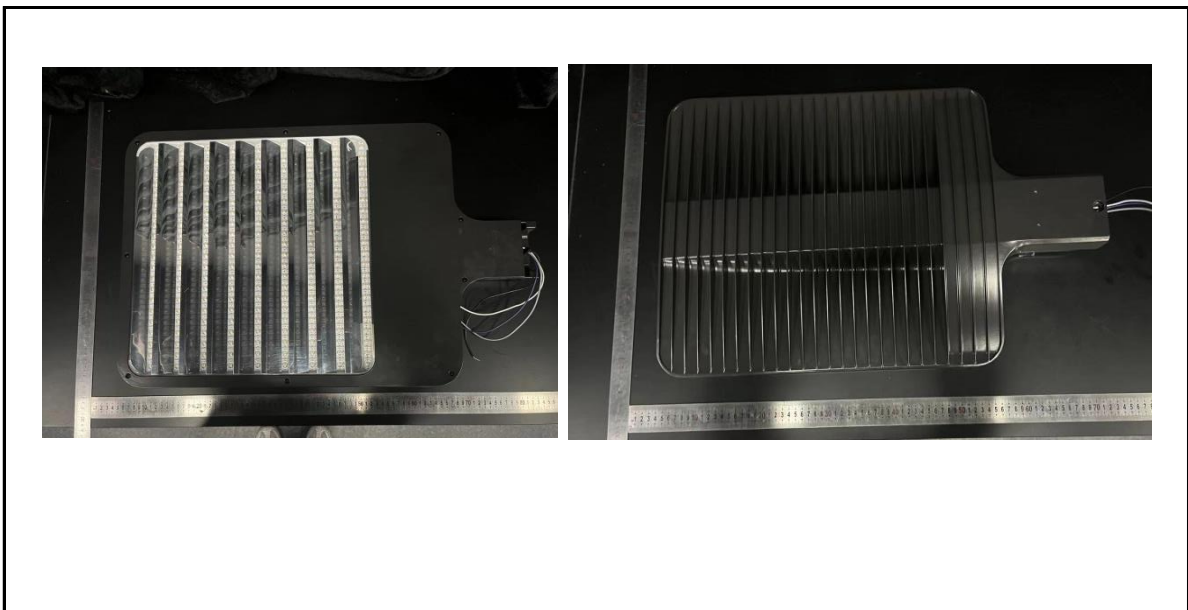

4.0 LM-79 Measurement and Test Results

4.1 Integrating Sphere Test

Model No.	ALEDL3TN	Sample ID.	B1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.3	Humidity (%RH)	56.0

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$.

The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.

The sample was measured using 4π geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.

Test Result

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
119.98	60	2.227	266.9	0.999
276.98	60	0.964	257.7	0.966


Test Result

CCT (K)	CRI	R9	Duv
3918	83	6	0.00052

Rf	Rg	IES Rcs,h1
84	95	-12%

4.1 Integrating Sphere Test

Results

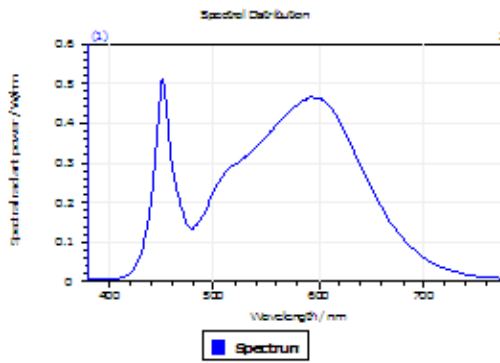

Spectral values


DominantWavelength	579.11 nm
Purity	0.298
PeakWavelength	451.30 nm
Radiant Power	80.47 W
Width50%	20.11 nm

Color Coordinates

Correlated Color Temperat 3918 K







x: 0.3845 u: 0.2263 u': 0.2263
y: 0.3804 v: 0.3359 v': 0.5038

ResultsCRICRI01	80.7	ResultsCRICRI09	6.2
ResultsCRICRI02	89.5	ResultsCRICRI10	75.6
ResultsCRICRI03	95.5	ResultsCRICRI11	80.1
ResultsCRICRI04	81.2	ResultsCRICRI12	63.6
ResultsCRICRI05	81.3	ResultsCRICRI13	82.9
ResultsCRICRI06	86.0	ResultsCRICRI14	97.8
ResultsCRICRI07	85.1	ResultsCRICRI15	74.1
ResultsCRICRI08	62.9	ResultsCRICRI16	71.8
ResultsCRI	82.8		



PlanckDistance 5.2E-004

4.1 Integrating Sphere Test

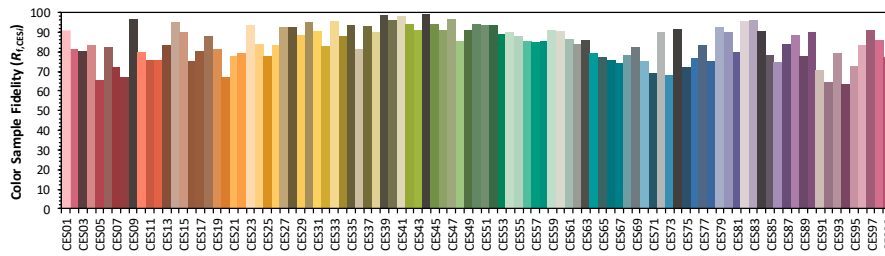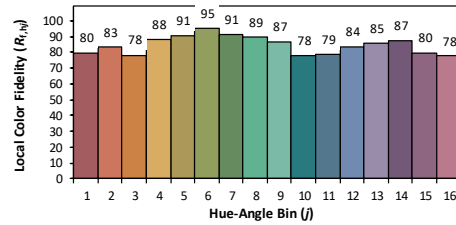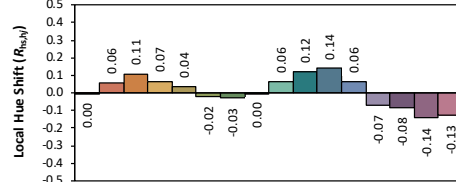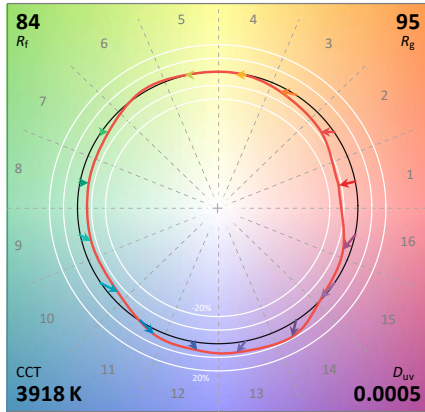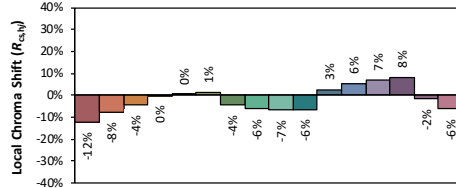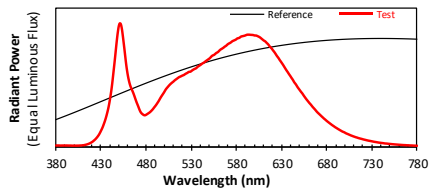

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.3845
 y 0.3804
 u' 0.2263
 v' 0.5038

CIE 13.3-1995 (CRI)	
R_a	83
R_g	7

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.0

4.0 LM-79 Measurement and Test Results

4.2 Goniophotometer Test

Model No.	ALEDL3TN	Sample ID.	B1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.3	Humidity (%RH)	54.0

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using a type C goniophotometer and software.

The ambient temperature shall be maintained at 25° C ± 1° C, measured at a point not more than 1 m from the sample and at the same height as the sample.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ±0.2 percent under load.

The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 0.5° vertical intervals and 10° horizontal intervals.

Test Conditions

Condition	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
WORST CASE	119.90	60	2.240	268.2	0.999
NON-WROST CASE	277.02	60	0.970	258.4	0.962


Test Result

Flux (lm)	Field Angle(10%)		Beam Angle(50%)		Luminous Efficacy (lm/W)
	C0-180	C90-270	C0-180	C90-270	
37050	96.8	161.3	41.2	151.1	138.1


Zonal Lumen Requirement (0°-90°)	Zonal Lumen Requirement (80°-90°)	BUG rating
100.00%	0.72%	B3-U0-G4

4.2 Goniophotometer Test

Light Distribution Curve

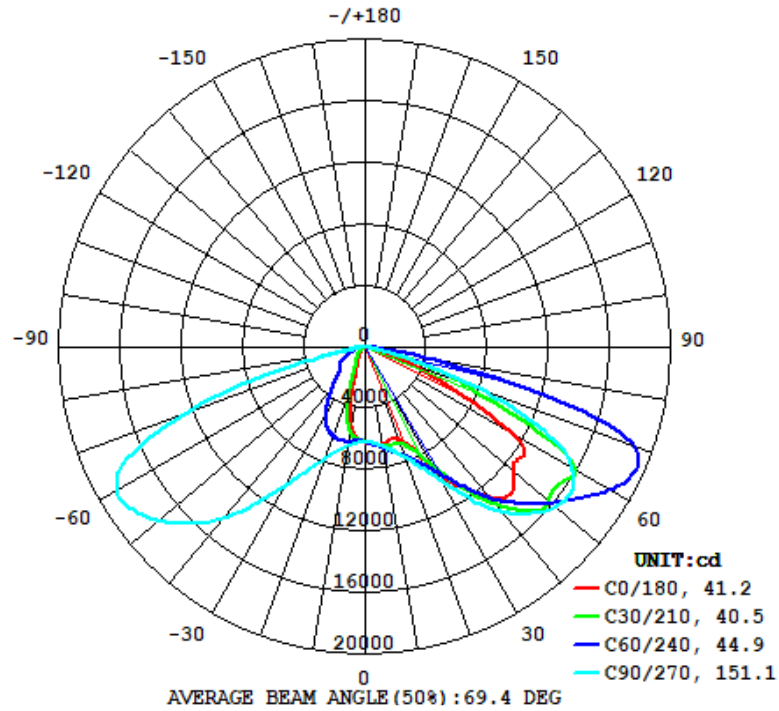

Isolux Plot

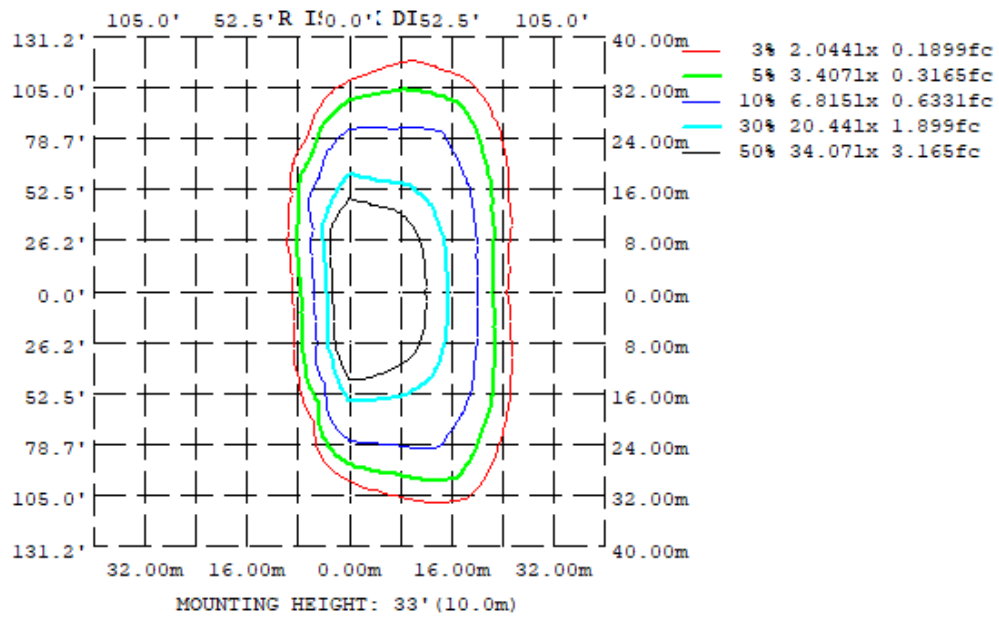

4.2 Goniophotometer Test


Zonal Lumen Summary

γ	C0	C45	C90	C135	C180	C225	C270	C315
10	645.5	666.3	657.6	593.2	530.4	601.7	654.2	657.4
20	643.6	711.8	766.2	389.9	207.7	456.1	771.1	683.7
30	922.5	879.8	1010	169.7	95.35	222.3	1037	860.7
40	1279	1302	1404	116.7	54.15	142.4	1461	1320
50	1273	1716	1622	79.26	25.37	112.5	1765	1759
60	1095	1884	1563	41.61	17.15	58.69	1867	1876
70	279.7	1219	793.6	20.85	6.393	33.72	1240	1191
80	21.01	112.6	51.82	4.417	2.307	6.674	107.0	160.7
90	0	0	0	0	0	0	0	0
100	0	0	0	0	0	0	0	0
110	0	0	0	0	0	0	0	0
120	0	0	0	0	0	0	0	0
130	0	0	0	0	0	0	0	0
140	0	0	0	0	0	0	0	0
150	0	0	0	0	0	0	0	0
160	0	0	0	0	0	0	0	0
170	0	0	0	0	0	0	0	0
180	0	0	0	0	0	0	0	0
DEG	LUMINOUS INTENSITY: *10cd							

	Zonal (lm)		Total (lm)	Percent
0-10	597.52	0 - 10	597.52	1.61%
10-20	1704.97	0 - 20	2302.49	6.21%
20-30	2789.77	0 - 30	5092.26	13.74%
30-40	4741.40	0 - 40	9833.66	26.54%
40-50	7085.64	0 - 50	16919.30	45.67%
50-60	8576.78	0 - 60	25496.08	68.82%
60-70	7816.56	0 - 70	33312.64	89.91%
70-80	3468.61	0 - 80	36781.25	99.28%
80-90	268.61	0 - 90	37049.86	100.00%
90-100	0.00	0 - 100	37049.86	100.00%
100-110	0.00	0 - 110	37049.86	100.00%
110-120	0.00	0 - 120	37049.86	100.00%
120-130	0.00	0 - 130	37049.86	100.00%
130-140	0.00	0 - 140	37049.86	100.00%
140-150	0.00	0 - 150	37049.86	100.00%
150-160	0.00	0 - 160	37049.86	100.00%
160-170	0.00	0 - 170	37049.86	100.00%
170-180	0.00	0 - 180	37049.86	100.00%


4.2 Goniophotometer Test

LCS/BUG

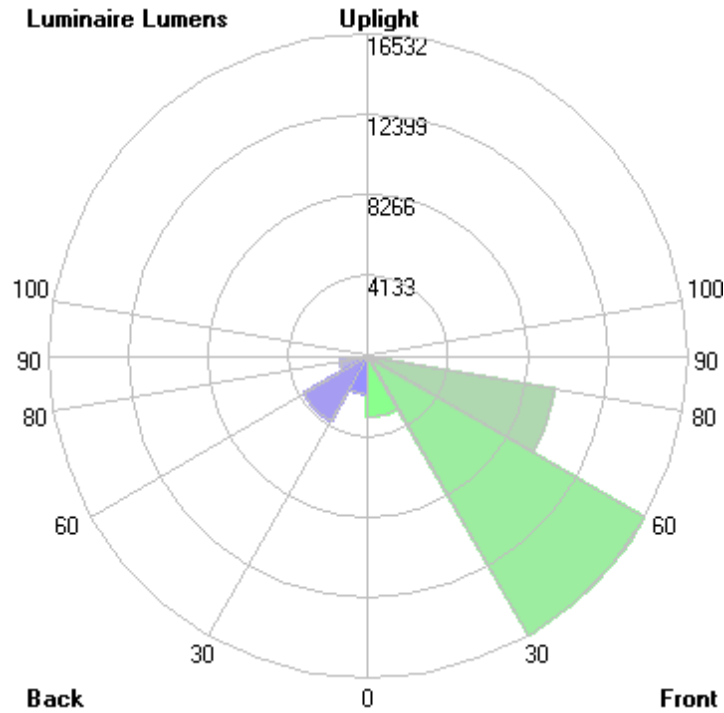


	Lumens	% Lamp	% Luminaire
FL - Front-Low (0-30)	3124.0	N.A.	8.4
FM - Front-Medium (30-60)	16531.7	N.A.	44.6
FH - Front-High (60-80)	9824.4	N.A.	26.5
FVH - Front-Very High (80-90)	231.9	N.A.	0.6
BL - Back-Low (0-30)	1968.3	N.A.	5.3
BM - Back-Medium (30-60)	3872.1	N.A.	10.5
BH - Back-High (60-80)	1460.7	N.A.	3.9
BVH - Back-Very High (80-90)	36.7	N.A.	0.1
UL - Uplight-Low (90-100)	0.0	N.A.	0.0
UH - Uplight-High (100-180)	0.0	N.A.	0.0
Total	37049.8	N.A.	100.0
BUG Rating	B3-U0-G4		

Coefficients of Utilization

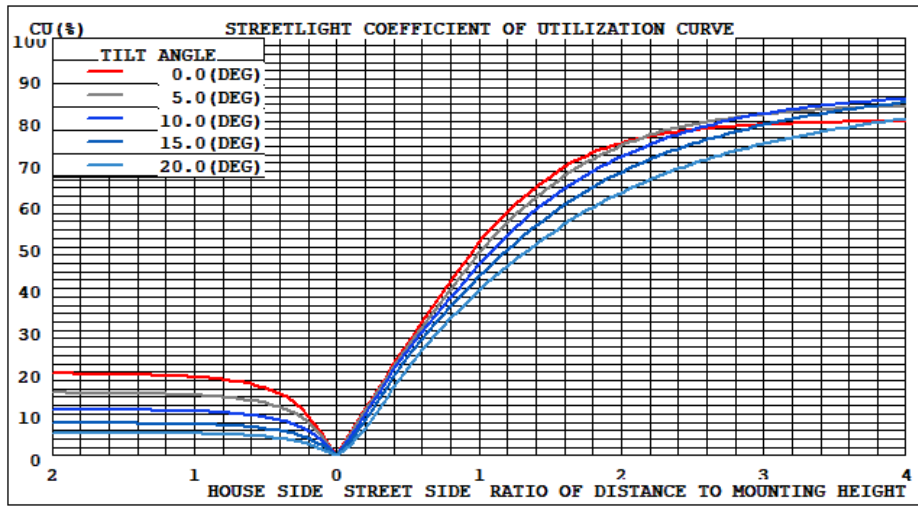

Isolines

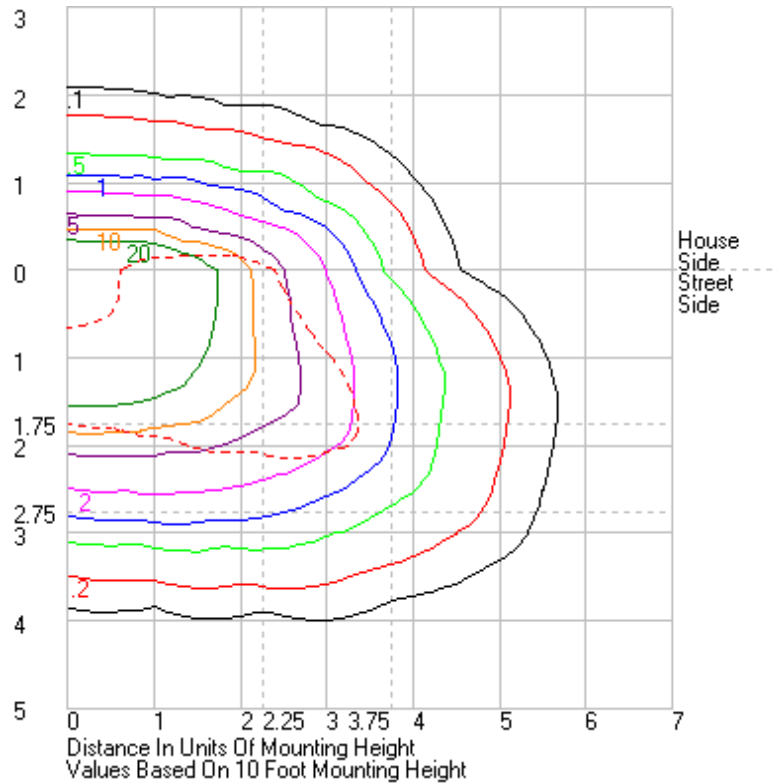



4.2 Goniophotometer Test

	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270	285	300	315	330	345	360
0	6211.09	6211.09	6211.09	6211.09	6211.09	6211.09	6211.09	6211.09	6211.09	6211.09	6211.09	6211.09	6211.09	6211.09	6211.09	6211.09	6211.09	6211.09	6211.09	6211.09	6211.09	6211.09	6211.09	6211.09	6211.09
1	6261.49	6258.97	6254.19	6247.59	6238.73	6228.36	6215.74	6202.11	6189.37	6177.41	6167.27	6159.2	6180.54	6179.56	6182.18	6186.34	6193.91	6202.22	6210.6	6218.38	6225.23	6230.45	6233.69	6234.44	6261.49
2	6296.66	6294.52	6288.89	6279.43	6267.39	6250.62	6228.09	6203.27	6179.42	6156.87	6137.58	6123.54	6141.95	6141.6	6148.33	6161.25	6178.65	6198.61	6217.91	6235.38	6249.77	6259.15	6265.42	6268.93	6296.66
3	6331.28	6329.24	6324.33	6312.95	6299.03	6277.42	6246.42	6212.36	6176.99	6143.78	6118.2	6099.12	6114.07	6114.17	6123.61	6142.85	6169.94	6201.55	6233.45	6259.31	6278.1	6290.96	6298.83	6303.29	6331.28
4	6363.51	6363.41	6359.98	6352.47	6338.24	6314.25	6273.67	6227.03	6180.12	6138.94	6100.53	6069.97	6080.03	6086.64	6105.46	6135.61	6170.5	6214.5	6257.1	6291.86	6313.84	6325.04	6331.63	6336.74	6363.51
5	6397.48	6400.62	6401.34	6398.02	6386.43	6356.18	6309.25	6249.45	6192.82	6134.83	6072.28	6025.6	6032.63	6042.59	6079.09	6129.45	6176.7	6230.57	6287.85	6328.33	6350.71	6361.03	6365.03	6368.15	6397.48
6	6425.28	6433.27	6446.01	6449.31	6438.25	6406.86	6350.87	6278.45	6208.03	6119.91	6031.76	5959.26	5961.99	5981.97	6044.04	6120.12	6190.49	6253.47	6323.04	6371.71	6395.04	6400.48	6401	6399.1	6425.28
7	6450.3	6466.27	6488.12	6502.08	6494.9	6463.52	6399.67	6313.93	6227.08	6101.41	5968.71	5858.09	5853.88	5896.16	5995.79	6107.77	6206.05	6283.99	6365.19	6418.37	6439.85	6446.19	6436.38	6424.42	6450.3
8	6466.39	6491.34	6529.47	6555.86	6555.32	6524.32	6452.27	6352.8	6239.03	6068.16	5871.07	5721.11	5713.31	5773.94	5920.57	6091.28	6224.84	6321.98	6414.38	6472.35	6490.84	6489.97	6464.1	6442.01	6466.39
9	6467	6508.43	6567.42	6609.53	6620.59	6593.08	6511.57	6397.52	6246.46	6010.23	5743.62	5540.29	5526.49	5614.63	5822.86	6062.25	6249.42	6371.12	6476.39	6537.6	6553.67	6534.77	6486.86	6447.75	6467
10	6454.9	6509.02	6597.73	6662.92	6692.05	6666.29	6575.75	6447.14	6252.98	5932.16	5579.03	5332.4	5303.91	5426.28	5693.63	6017.13	6270.75	6424.1	6541.55	6641.6	6600.99	6574.06	6501.39	6439.87	6454.9
11	6434.73	6499.1	6617.34	6719.26	6765.21	6744.41	6643.89	6501.14	6242.92	5825.6	5383.22	5090	5062.27	5208.34	5539.4	5956.43	6295.53	6482.96	6607.32	6743.08	6648.32	6613.62	6504.69	6423.41	6434.73
12	6404.04	6483.81	6627.85	6770.83	6840.13	6829.25	6721.83	6557.54	6224.44	5692.6	5168.25	4828.59	4788.25	4964.33	5358.68	5878.74	6315.36	6554.2	6673.08	6726.77	6709.66	6644.86	6505.57	6400.07	6404.04
13	6368.79	6458.13	6633.09	6815.63	6920.16	6919	6806.03	6617.25	6193.37	5539.18	4928.26	4527.57	4477.11	4693.33	5159.26	5775.09	6329.28	6630.85	6752.27	6822.33	6781.41	6631.64	6499.1	6370.54	6368.79
14	6326.01	6428.63	6631.77	6855.25	7002.61	7017.29	6899.76	6678.51	6146.38	5363.25	4666.85	4186.1	4124.38	4380.63	4933.81	5655.19	6342.92	6720.23	6855.87	6925.44	6853.17	6620.18	6488.69	6335.29	6326.01
15	6293.76	6399.46	6627.78	6892.88	7091.11	7124.06	7005.66	6747.22	6091.14	5172.63	4369.67	3824.98	3752.75	4031.84	4685.04	5516.64	6346.52	6811.51	6964.25	7031.04	6928.28	6686.55	6471.25	6299.33	6293.76
16	6273.85	6381.01	6621.4	6931.94	7181.11	7241.92	7120.18	6816.51	6014.35	4963.63	4028.9	3440.4	3363.39	3669.73	4397.84	5362.83	6339.99	6913.16	7094.18	7149.42	7008.08	6711.41	6453.81	6275.69	6273.85
17	6274.4	6376.24	6620.45	6973.53	7274.81	7365.86	7243.28	6883.48	5924.72	4730.88	3691.58	3079.76	2993.21	3300.36	4082.52	5196.77	6326.04	7026.38	7233.37	7281.58	7083.66	6733.37	6448.54	6267.72	6274.4
18	6298.99	6395.27	6638.61	7016.99	7375.07	7501.42	7377.6	6956.12	5824.03	4471.73	3339.62	2731.31	2643.85	2949.58	3753.77	5011.66	6301.56	7143.22	7381.64	7419.31	7170.34	6758.19	6456.03	6284.7	6298.99
19	6351.19	6436.8	6669.8	7062.16	7474.39	7638.64	7513.75	7020.59	5711.22	4189.63	2999.53	2424.8	2339.02	2625.64	3420.44	4796.94	6265.12	7270.61	7544	7566.74	7261.04	6794.17	6486.65	6325.31	6351.19
20	6436.42	6510.43	6722.36	7118.27	7582.2	7786.47	7661.67	7086.08	5593.29	3898.78	2690.99	2155.98	2076.81	2334.77	3096.34	4560.72	6223.69	7398	7710.98	7720.91	7359.72	6837.18	6543.95	6398.81	6436.42
21	6544.22	6614.27	6796.5	7186.64	7694.63	7952.68	7828.21	7152.96	5458.08	3596.67	2414.95	1919.47	1838.98	2082.78	2798.36	4306.64	6168.75	7533.06	7895.58	7884.54	7469.24	6899.54	6612.08	6501.68	6544.22
22	6676.3	6739.34	6899.54	7270.53	7808.68	8132.18	8001.45	7211.15	5312.49	3310.7	2172.97	1707.06	1629.51	1861.54	2524.2	4039.7	6106.27	7674.75	8087.23	8054.44	7584.53	6988.49	6681.09	6604.54	6676.3
23	6852.83	6891.81	7040.1	7381.42	7946.02	8340.28	8193.85	7278.1	5153.55	3031.92	1963.35	1523.83	1481.27	1659.11	2286.16	3766.41	6037.66	7816.87	8294.44	8245.18	7703.97	7099.92	6825.13	6731.5	6852.83
24	7066.85	7086.29	7199.86	7508.44	8098.75	8558.25	8400.13	7334.03	4971.38	2773.52	1770.78	1379.36	1362.1	1495.45	2076.06	3495.88	5962.01	7972.78	8524.49	8455.45	7835.66	7241.15	6982.53	6928.62	7066.85
25	7306.97	7320.83	7399.61	7660.37	8280.06	8799.28	8621.39	7391.47	4788.31	2542.95	1605.02	1274.71	1243.47	1389.31	1886.62	3238.82	5876.45	8135.23	8770.16	8685.04	7978.81	7407.07	7182.84	7160.94	7306.97
26	7605.27	7596.08	7614.24	7836.95	8467.59	9065.89	8871.66	7451.6	4577.63	2330.82	1471.48	1193.98	1167.45	1283.54	1720.11	2994.25	5779.6	8309.21	9048.29	8940.4	8151.61	7603.77	7432.38	7432.64	7605.27
27	7942.44	7920.5	7877.31	8044.27	8665.58	9343.65	9132.53	7504.27	4360.93	2152.28	1369.62	1129	1107.57	1212.42	1578.92	2772.67	5663.49	8493.09	9344.73	9213.68	8335.11	7825.23	7704.08	7744.81	7942.44
28	8327.91	8288.5	8180.27	8280.87	8893.42	9661.54	9437.42	7575.63	4134.2	1984.98	1292.16	1075.39	1052.5	1154.96	1470.07	2570.12	5530.98	8676.79	9663.91	9505.95	8557.11	8055.62	8019.19	8102.36	8327.91
29	8780.04	8697.29	8501.37	8521.93	9125.43	9982.56	9749.84	7632.91	3906.77	1836.95	1233.38	1024.91	1001.97	1102.02	1397.39	2384.81	5383.73	8867.72	10011.5	9814.49	8797.73	8315.32	8368.65	8520.54	8780.04
30	9224.95	9152.11	8871.04	8798.11	9389.09	10319	10101.9	7694.88	3688.77	1697.36	1182.97	976.39	953.53	1052.76	1338.03	2222.97	5216.21	9067.1	10366.6	10128.2	9058.29	8607.16	8764.74	8969.22	9224.95
31	9673	9621.22	9290.86	9102.5	9680.01	10695.3	10485.2	7764.96	3477.79	1590.05	1136.46	930.48	907.14	1005.57	1284.45	2070.64	5040.05	9267.64	10751.2	10452	9338.68	8942.32	9194.75	9431.88	9673
32	10121.3	10091.3	9736.97	9430.6	9987.25	11059.9	10856.2	7813.13	3277.59	1501.72	1091.54	885	861.04	959.94	1238.79	1928.97	4852.87	9475.17	11151.4	10789	9644.89	9294.81	9668.37	9904.34	10121.3
33	10529	10547.6	10221.7	9796.76	10327.5	11477.5	11285.1	7879.8	3089.03	1437.2	1048.01	839.79	814.96	915.66	1195.64	1800.77	4652.98	9684.23	11558.7	11143	9979.34	9688.66	10171.9	10348.7	10529
34	10900.4	10988.8	10715.4	10168.8	10675	11889.3	11699.6	7917.92	2916.17	1386.99	1005.24	794.61	770.31	870.88	1152.85	1698.56	4461.34	9883.69	11987.8	11499.9	10306.2	10111.3	10673.3	10773.1	10900.4
35	11253.1	11389	11218	10579.4	11038.6	12302.9	12129.8	7942.39	2753.69	1343.67	962.49	749.96	724.63	825.24	1110.58	1614.82	4266.6	10076.2	11873.1	10652.3	10570.3	11172	11177.9	11253.1	11253.1
36	11568.3	11752.6	11699.7	11017.1	11414.9	12728.6	12579.7	7953.58	2607.33	1306.63	917.99	707.83	683.01	781.96	1068.14	1557.48	4071.36	10261.6	12865.1	12248.9	11012.1	11067	11650.8	11532.3	11568.3
37	11883.6	12106.5	12185.3	11489.6	11780.5	13116	12980.2	7919.01	2462.76	1270.35	872.93	669.73	645	740.76	1026.59	1515.2	3884.84	10430.4	13328.3	12622.4	11383.2	11585.8	12106.1	11877.8	11883.6
38	12204.2	12443	12616.5	11993.2	12171.9	13457.8	13369	7877.67	2333.99	1236.59	830.6	636.85	609.55	700.43	983.4	1482.03	3695.58	10583.1	13771.1	13000.2	11775.3	12124.6	12533.1	122	



161	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
162	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
163	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
164	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
165	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
166	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
167	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
168	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
169	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
170	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
171	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
172	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
173	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
174	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
175	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
176	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
177	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
178	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
179	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
180	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

4.0 LM-79 Measurement and Test Results

4.3 THD and PF Test

Model No.	ALEDL3TN	Sample ID.	B1
Temperature (°C)	25.3	Humidity (%RH)	56.0

Test Method

The samples were tested according to the ANSI C82.77:2002.

The total harmonic distortion shall be measured to the 40th order.

The ambient temperature condition was maintained at 25° C ± 1° C. The sample measurements were made using a digital power meter and power supply. The sample was operated at rated voltage and was stabilized before measurement. The total harmonic distortion were calculated.

Test Results

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	THD
119.98	60	2.227	266.9	0.999	1.83%
276.98	60	0.964	257.7	0.966	4.23%

5.0 Equipment Information

Test Equipment			
Equipment ID	Equipment Name	Last Calibration Date	Calibration Due Date
DLF107	Integrating Sphere System	2020/12/26	2021/12/25
DLF108	Auxiliary Lamp	2020/12/26	2021/12/25
DLF122	Measurement Standard Lamp Standard Lamp Type: 220 V, 0.4720 A, Tungsten, Omni-derectional	2020/12/26	2021/12/25
DLF116	AC Power Source	2020/12/26	2021/12/25
DLF113	Power Meter	2020/12/26	2021/12/25
DLF112	Temperature Recorder	2020/12/26	2021/12/25
DLF114	Temperature & Humidity Datalogger	2020/12/26	2021/12/25
DLF101	Goniophotometer	2020/12/26	2021/12/25
DLF125	Standard Lamp Standard Lamp Type: 76.58 V, 6.7875 A, Tungsten, Omni-derectional	2020/12/26	2021/12/25
DLF104	AC Power Source	2020/12/26	2021/12/25
DLF507	DC Power Source	2020/12/26	2021/12/25
DLF102	Power Meter	2020/12/26	2021/12/25
DLF111	Temperature & Humidity Datalogger	2020/12/26	2021/12/25
DLF119	Power Meter	2020/12/26	2021/12/25
DLF031	Temperature data logger	2020/12/26	2021/12/25
DLF022	Digital power meter	2020/12/26	2021/12/25
DLF003	Temperature & Humidity Datalogger	2020/12/26	2021/12/25

***** End of Test Report*****