

Photometric Test Report

Relevant Standards

- ☒ IES LM-79-2008
- ☒ ANSI C82.77:2017

Prepared For

RAB Lighting Inc.

Room 6A33, No.1388, Wuzhong road, Shanghai, China

Xiao Xiang, 15921313292, Gary.Xiao@rabweb.com

Prepared By

Deliver Co., Ltd.

Block 11, 78 Keling Road, SSTP, Suzhou, China

0512-66801950, kevin.jia@szdeliver.com

Project Number

DLF2111105

Report Number

DLF2111105-13a

Test Date

2021/11/8

Issue Date

2021/11/11

Prepared By



Wangzun Zhu

Approved By



Kevin Jia

The results contained in this report pertain only to the tested sample.

This report shall not be reproduced, except in full, without written approval of Deliver Co., Ltd.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP.

1.0 Test Summary

DLC Technical Requirements v5.1

Outdoor - Pole/Arm-Mounted Area and Roadway Luminaires				
Requirement Category	Test Method	Requirements		Test value
Luminaire Output (lm) (Goniophotometer - Section 4.2)	IES LM-79-2008	1000		47266
Minimum Luminaire Efficacy (lm/W) (Goniophotometer - Section 4.2)	IES LM-79-2008	Standard 105	Premium 120	150.3
Power (Input Wattage) (W) (Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		314.5
Total Harmonic Distortion (A%) (THD & PF - section 4.3)	ANSI C82.77:2014	20.00%	120V	3.51%
		20.00%	277V	11.22%
Power Factor (THD & PF - section 4.3)	ANSI C82.77:2014	0.9	120V	0.999
		0.9	277V	0.956
Allowable CCTs* (K) (Integrating Sphere - Section 4.1)	IES LM-79-2008	7 step	5029±355	5085
		4 step	5029±220	
Minimum CRI (Integrating Sphere - Section 4.1)	IES LM-79-2008 CIE 13.3-1995	≥70		85
Minimum R9 (Integrating Sphere - Section 4.1)	IES LM-79-2008 CIE 13.3-1995	≥-40		17
Minimum Rf (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥70		84
Minimum Rg (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥89		93
Minimum IES Rcs,h1 (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	-18%≤IES Rcs,h1≤+23%		-12%
Zonal Lumen Requirement (0°-90°) (Goniophotometer - Section 4.2)	IES LM-79-2008	100%		100.00%
Zonal Lumen Requirement (80°-90°) (Goniophotometer - Section 4.2)	IES LM-79-2008	≤10%		0.62%
Input Voltage (V)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		120
(Goniophotometer - Section 4.2)		Non-Worst Case		277
Input Current (A)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		2.624
(Goniophotometer - Section 4.2)		Non-Worst Case		1.174
Power (Input Wattage - W)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		314.5
(Goniophotometer - Section 4.2)		Non-Worst Case		310.5

2.0 Test List

Test Item	Test	Test Date	Model Number	Sample No.
1	Integrating Sphere Test	2021/11/8	ALEDXL5T	M1
2	Goniophotometer Test	2021/11/8	ALEDXL5T	M1
3	THD and PF Test	2021/11/8	ALEDXL5T	M1

Remark(If any)

- 1、 This report shall not be used by the client to claim product endorsement by NVLAP, NIST or any agency of the US government.
- 2、 The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.


3.0 Production Description

Luminaire Description: ALEDXL5T

Description: 345W/45,000 lm @ 5000K

Electrical Specification: 120V-277V,50/60HZ

Photos of Luminaire Characteristics

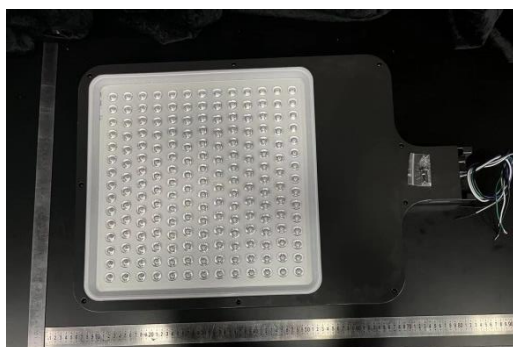

4.0 LM-79 Measurement and Test Results

4.1 Integrating Sphere Test

Model No.	ALEDXL5T	Sample ID.	M1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.3	Humidity (%RH)	56.0

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$.

The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.

The sample was measured using 4π geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.

Test Result

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
120.03	60	2.615	313.7	0.999
276.97	60	1.173	310.6	0.956


Test Result

CCT (K)	CRI	R9	Duv
5085	85	17	0.00078

Rf	Rg	IES Rcs,h1
84	93	-12%

4.1 Integrating Sphere Test

Results

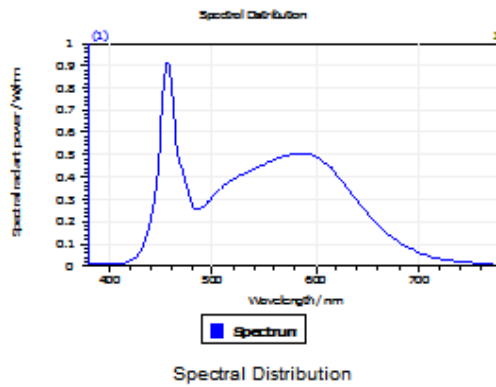


Spectral values

DominantWavelength 570.63 nm
Purity 0.083
PeakWavelength 456.62 nm
Radiant Power 100.8 W
Width50%:

Color Coordinates


Correlated Color Temporal 5085 K
x: 0.3429 u: 0.2100 u': 0.2100
y: 0.3514 v: 0.3228 v': 0.4842

CRI01	84.7	CRI09	16.5
CRI02	93.9	CRI10	83.5
CRI03	94.8	CRI11	80.5
CRI04	81.2	CRI12	62.6
CRI05	83.9	CRI13	88.0
CRI06	88.4	CRI14	98.0
CRI07	85.5	CRI15	79.9
CRI08	68.0	CRI16	75.0
ResultsCRI	85.0		



PlankDistance 7.8E-004

4.1 Integrating Sphere Test

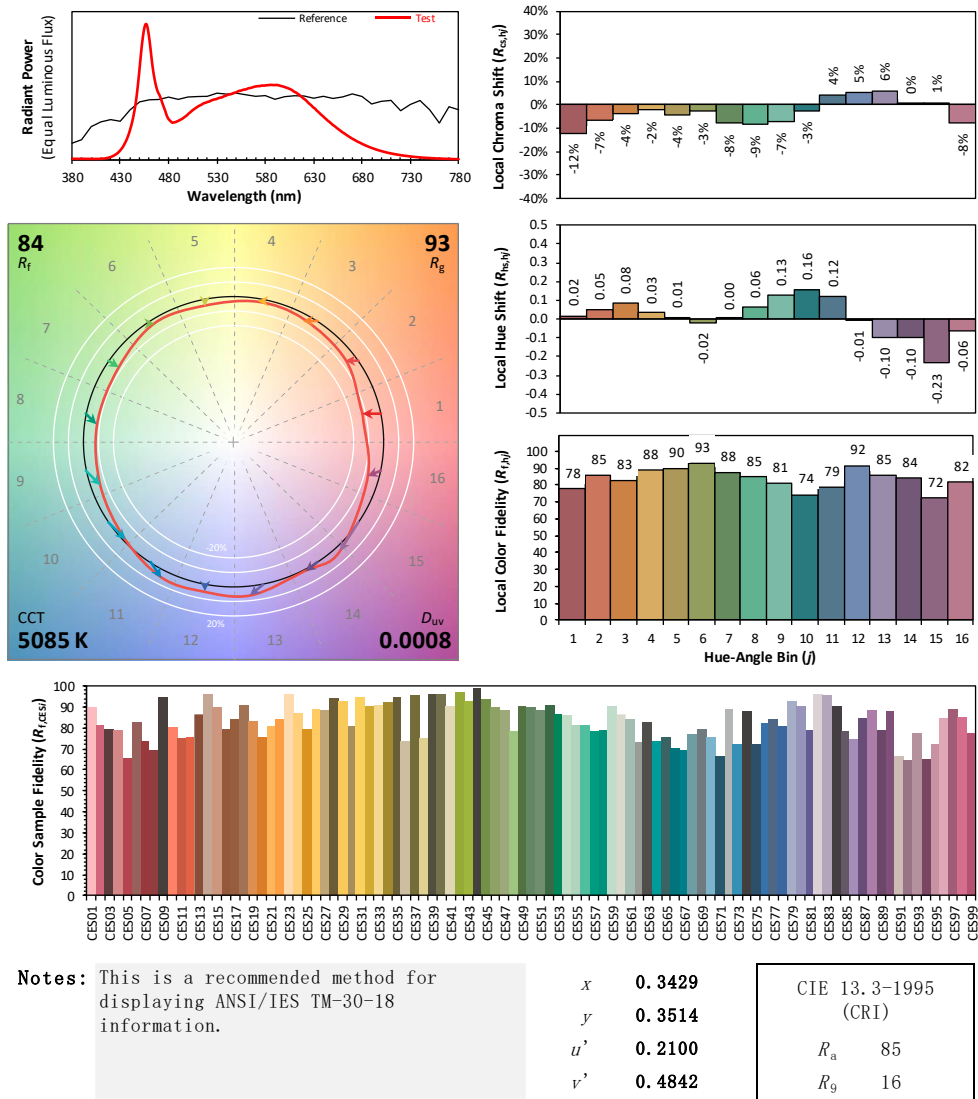

lors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.0

4.0 LM-79 Measurement and Test Results

4.2 Goniophotometer Test

Model No.	ALEDXL5T	Sample ID.	M1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.3	Humidity (%RH)	54.0

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using a type C goniophotometer and software.

The ambient temperature shall be maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$, measured at a point not more than 1 m from the sample and at the same height as the sample.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.

The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 0.5° vertical intervals and 10° horizontal intervals.

Test Conditions

Condition	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
WORST CASE	119.99	60	2.624	314.5	0.999
NON-WORST CASE	277.03	60	1.174	310.5	0.955


Test Result

Flux (lm)	Field Angle(10%)		Beam Angle(50%)		Luminous Efficacy (lm/W)
	C0-180	C90-270	C0-180	C90-270	
47266	164.2	153.8	145.3	144.0	150.3


Zonal Lumen Requirement (0° - 90°)	Zonal Lumen Requirement (80° - 90°)	BUG rating
100.00%	0.62%	B5-U0-G3

4.2 Goniophotometer Test

Light Distrubtion Curve

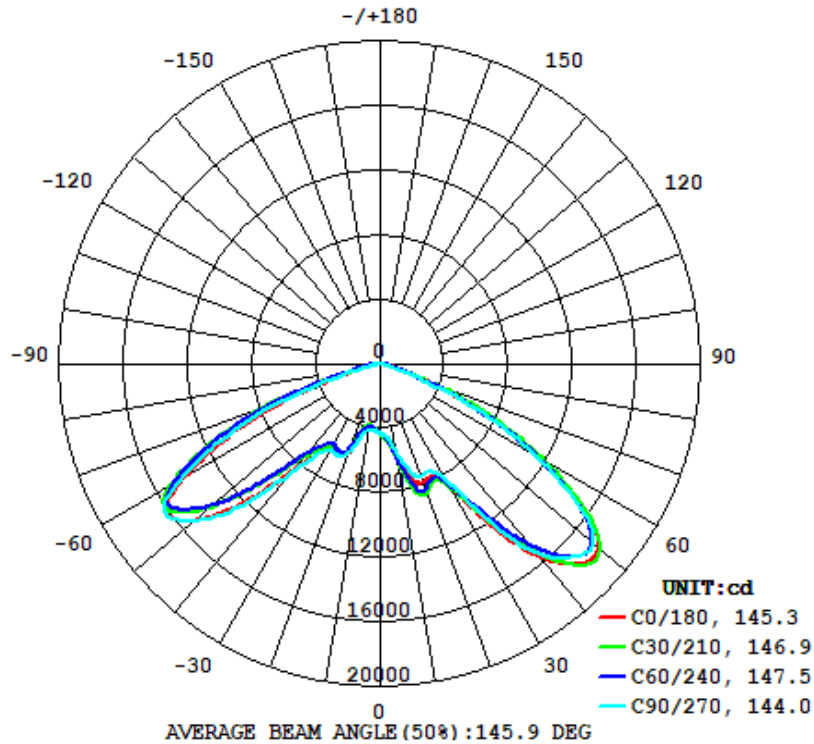

Isolux Plot

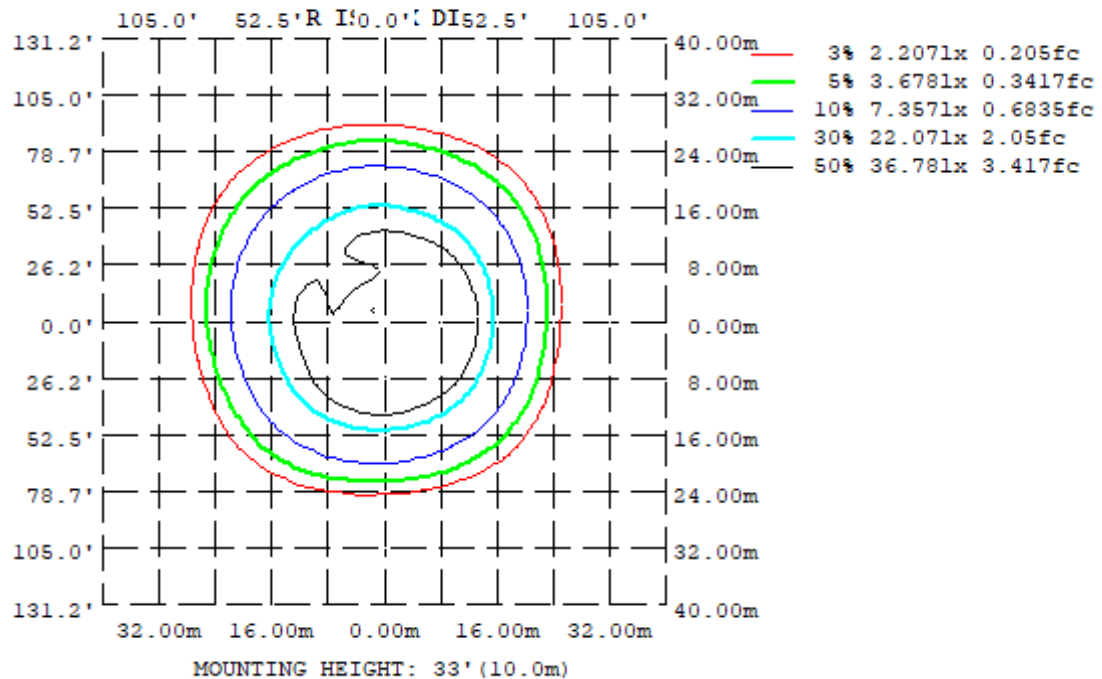

4.2 Goniophotometer Test


Zonal Lumen Summary

γ	C0	C45	C90	C135	C180	C225	C270	C315
10	550.1	572.3	524.8	451.7	403.4	394.1	418.6	472.7
20	785.1	860.2	744.4	717.9	584.4	553.7	583.1	729.2
30	873.0	868.3	839.4	693.5	613.9	598.1	622.0	717.2
40	1564	1473	1534	1046	878.8	714.5	898.6	1076
50	1779	1807	1738	1638	1507	1296	1513	1666
60	1133	1186	1097	1387	1415	1543	1449	1433
70	291.7	382.8	227.1	522.3	517.7	777.0	578.4	599.1
80	58.27	63.83	23.63	69.95	72.92	99.48	34.41	84.88
90	0	0	0	0	0	0	0	0
100	0	0	0	0	0	0	0	0
110	0	0	0	0	0	0	0	0
120	0	0	0	0	0	0	0	0
130	0	0	0	0	0	0	0	0
140	0	0	0	0	0	0	0	0
150	0	0	0	0	0	0	0	0
160	0	0	0	0	0	0	0	0
170	0	0	0	0	0	0	0	0
180	0	0	0	0	0	0	0	0
DEG	LUMINOUS INTENSITY: *10cd							

	Zonal (lm)		Total (lm)	Percent
0-10	428.32	0 - 10	428.32	0.91%
10-20	1684.42	0 - 20	2112.74	4.47%
20-30	3266.76	0 - 30	5379.50	11.38%
30-40	5742.57	0 - 40	11122.07	23.53%
40-50	10960.22	0 - 50	22082.29	46.72%
50-60	13820.11	0 - 60	35902.40	75.96%
60-70	8994.11	0 - 70	44896.51	94.99%
70-80	2077.88	0 - 80	46974.39	99.38%
80-90	291.95	0 - 90	47266.34	100.00%
90-100	0.00	0 - 100	47266.34	100.00%
100-110	0.00	0 - 110	47266.34	100.00%
110-120	0.00	0 - 120	47266.34	100.00%
120-130	0.00	0 - 130	47266.34	100.00%
130-140	0.00	0 - 140	47266.34	100.00%
140-150	0.00	0 - 150	47266.34	100.00%
150-160	0.00	0 - 160	47266.34	100.00%
160-170	0.00	0 - 170	47266.34	100.00%
170-180	0.00	0 - 180	47266.34	100.00%


4.2 Goniophotometer Test

LCS/BUG

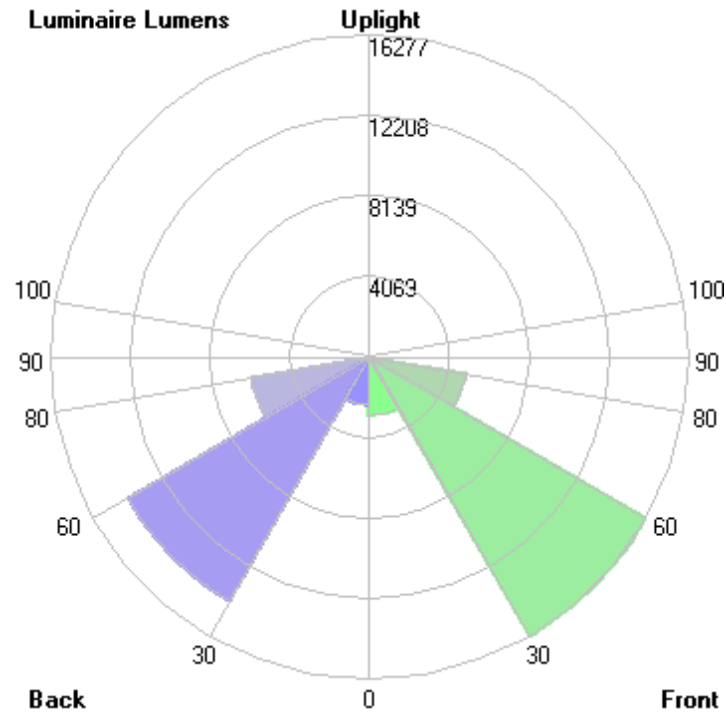


	Lumens	% Lamp	% Luminaire
FL - Front-Low (0-30)	2944.7	N.A.	6.2
FM - Front-Medium (30-60)	16277.2	N.A.	34.4
FH - Front-High (60-80)	4982.3	N.A.	10.5
FVH - Front-Very High (80-90)	126.6	N.A.	0.3
BL - Back-Low (0-30)	2434.8	N.A.	5.2
BM - Back-Medium (30-60)	14245.7	N.A.	30.1
BH - Back-High (60-80)	6089.7	N.A.	12.9
BVH - Back-Very High (80-90)	165.4	N.A.	0.3
UL - Uplight-Low (90-100)	0.0	N.A.	0.0
UH - Uplight-High (100-180)	0.0	N.A.	0.0
Total	47266.4	N.A.	100.0
BUG Rating	B5-U0-G3		

Coefficients of Utilization

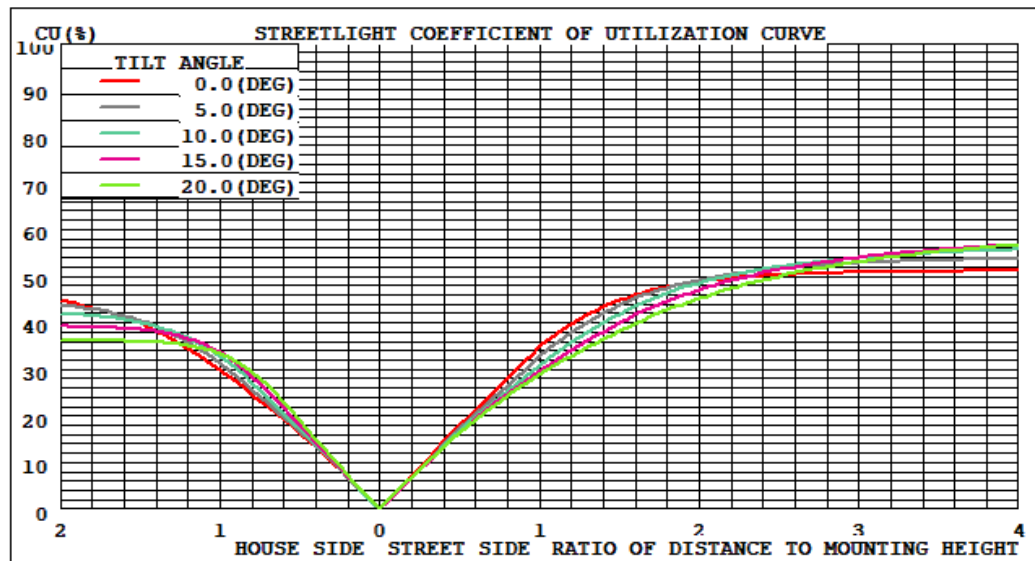

Isolines

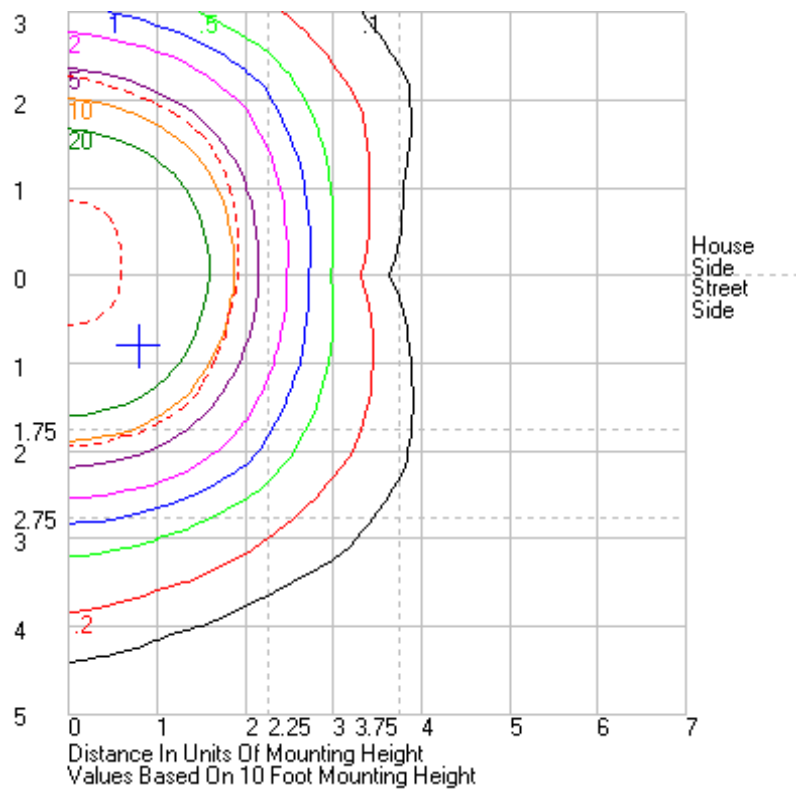

4.2 Goniophotometer Test

	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270	285	300	315	330	345	360
0	4318.5	4318.5	4318.5	4318.5	4318.5	4318.5	4318.5	4318.5	4318.5	4318.5	4318.5	4318.5	4318.5	4318.5	4318.5	4318.5	4318.5	4318.5	4318.5	4318.5	4318.5	4318.5	4318.5	4318.5	4318.5
1	4366.12	4373.34	4377.39	4376.94	4373.35	4367.05	4356.91	4345.83	4332.77	4318.91	4306.07	4293.95	4274.13	4271.53	4271.03	4276.13	4283.32	4293.93	4305.85	4319.14	4332.84	4345.99	4358.78	4367.76	4366.12
2	4421.29	4434.64	4440.43	4438.31	4427.88	4414.2	4393.93	4370.25	4341.8	4311.43	4285.08	4261.36	4232.32	4223.83	4223.46	4229.35	4242.19	4261.68	4283.48	4310.21	4338.49	4367.16	4392.95	4413.9	4421.29
3	4485.97	4504.98	4510	4506.63	4492.56	4466.87	4436.39	4400.72	4357.31	4311.81	4270.86	4233.87	4194.82	4180.2	4174.62	4180.87	4201.12	4230.55	4266.26	4305.94	4348.48	4391.74	4433.37	4466.41	4485.97
4	4554.28	4581.02	4590.71	4585.06	4562.07	4527.01	4485.07	4436.23	4379.12	4320.46	4261.99	4209.56	4159.75	4138.8	4129.42	4138.43	4160.96	4198.46	4246.53	4303.2	4363.72	4423.3	4478.17	4522.77	4554.28
5	4629.43	4665.08	4680.74	4673.93	4643.27	4596.38	4541.57	4479.56	4406.36	4330.57	4256.39	4188.71	4130.25	4102.8	4088.06	4096.22	4121.89	4166.42	4224.77	4297.34	4378.39	4456.7	4522.71	4582.27	4629.43
6	4720.2	4772.31	4791.81	4781.4	4744.28	4682.08	4611.89	4531.24	4442.51	4348.41	4256.75	4172.64	4105.15	4071.91	4051.02	4053.59	4084.05	4138.42	4208.31	4294.48	4392.53	4491.59	4572.66	4648.3	4720.2
7	4845.25	4918.92	4948.99	4930.73	4875.92	4800.56	4708.44	4600.99	4485.64	4372.4	4256.98	4155.49	4078	4037.61	4013.91	4018.03	4051.7	4114.96	4196.14	4295.63	4411.42	4526.59	4633.7	4728.46	4845.25
8	5012.24	5113.03	5153.56	5137.37	5060.76	4957.23	4837.58	4697.68	4547.31	4400.79	4265.05	4146.09	4055.8	4008.26	3981.48	3987.57	4023.72	4094.58	4185.66	4300.13	4433.29	4572.29	4707.27	4836	5012.24
9	5230	5357.44	5421.78	5405.61	5314.15	5181.37	5020.78	4830.4	4641.02	4447.47	4282.14	4141.28	4039.57	3979.81	3954.31	3960.51	4000.57	4080.05	4182.53	4313.13	4466.69	4635.94	4813.09	4995.16	5230
10	5500.97	5657.79	5738.16	5723.37	5618.05	5448.08	5247.76	5015.13	4759.86	4516.59	4302.78	4148.51	4034.04	3958.56	3931.41	3940.68	3986.86	4069.06	4186.5	4337.42	4515.11	4726.58	4964.04	5194.23	5500.97
11	5795.78	6001.84	6132	6129.3	5984.32	5771.32	5535.02	5262.62	4945.54	4625.37	4353.1	4179.05	4047.89	3958.67	3915.23	3930.71	3978.42	4065.66	4199.88	4375.41	4588.91	4853.33	5154.97	5441.43	5795.78
12	6111.58	6360.35	6544.92	6569.98	6391.15	6133.05	5849.88	5543.76	5176.99	4779.62	4445.69	4240.2	4087.04	3975.26	3919.28	3928.94	3979.41	4080.49	4232.37	4437.64	4697.09	5029.29	5389.37	5713.59	6111.58
13	6441.84	6743.57	6971.37	7011.16	6799.25	6482.03	6165.59	5845.75	5445.36	4995.68	4597.44	4342.11	4162.16	4022.29	3947.17	3941.62	4004	4122.62	4299.02	4537.35	4845.3	5247.91	5649.38	5992.86	6441.84
14	6774.83	7140.6	7426.8	7462.78	7220.91	6834.57	6471.26	6150.59	5763.31	5272.95	4813.92	4496.36	4293.56	4120.09	4012.03	3983.87	4061.39	4207.98	4412.55	4691.67	5055.76	5515.46	5932.95	6280.01	6774.83
15	7098.06	7519.34	7836.39	7879.04	7603.82	7165.89	6743.13	6422.79	6079.01	5605.46	5097.26	4719.8	4478.05	4275.13	4132.9	4077.74	4166.07	4337.57	4572.85	4898.89	5320.96	5805.47	6226.77	6567.15	7098.06
16	7409.79	7878.58	8204.58	8247.34	7951.47	7473.22	7005.05	6688.18	6397.4	5980.67	5438.98	5007.7	4717.87	4488.4	4327.23	4242.27	4330.02	4516.9	4786.21	5161.11	5645.62	6130.4	6520.59	6853.42	7409.79
17	7656.58	8148.3	8478.89	8504.48	8200.93	7713.37	7218.63	6917.45	6697.79	6354.98	5830.72	5337.02	5005.59	4743.15	4582.75	4476.53	4537.97	4733.16	5036.51	5466.85	5986.54	6452.24	6816.17	7118.61	7656.58
18	7807.58	8301.58	8626.72	8647.5	8349.92	7872.06	7364.26	7081.57	6946.25	6708.49	6238.98	5691.15	5321.52	5056.08	4891.46	4779.81	4803.95	4990.57	5311.4	5796.52	6330.27	6778.68	7075.67	7316.29	7807.58
19	7857.34	8352.29	8639.84	8666.76	8387.55	7943.35	7437.14	7167.42	7101.54	6993.57	6584.98	6025.07	5609.51	5378.39	5251.77	5148.97	5102.38	5249.5	5590.93	6139.43	6673.43	7074.39	7252.84	7415.39	7857.34
20	7851.35	8329.6	8573.44	8602.07	8335.77	7932.38	7444.29	7198.72	7175.03	7178.86	6839.06	6286.42	5844.47	5672.03	5617.06	5537.42	5409.22	5485.18	5831.25	6440.44	6980.14	7292.01	7350.07	7441.15	7851.35
21	7817.11	8260.08	8461.12	8475.8	8224.24	7858.83	7402.89	7183.94	7201.23	7247.04	6990.26	6462.68	5995.63	5882.6	5922.15	5893.38	5694.19	5672.75	6024.41	6676.68	7209.88	7425.46	7389.55	7438.83	7817.11
22	7766.76	8171.68	8330.32	8325.13	8102.33	7778.38	7356.66	7146.47	7186.86	7225.82	7042.21	6565.21	6087.99	6010.08	6135.9	6167.56	5900.14	5804.79	6161.65	6836.71	7336.24	7483.9	7400.6	7422.92	7766.76
23	7722.22	8087.32	8207.8	8183.91	7977.79	7710.87	7331.44	7113.27	7131.62	7150.6	7019.42	6604.02	6126.96	6067.82	6264.52	6325	6023.81	5897.1	6252.08	6926.47	7371.08	7473.8	7386.96	7402.83	7722.22
24	7707.98	8027.1	8119.59	8068.46	7884.46	7671.78	7343.33	7105.74	7059.79	7062.35	6935.82	6586.32	6129.34	6077.42	6314.82	6381.41	6081.21	5948.19	6296.15	6954.19	7339.99	7414.48	7362.14	7400.75	7707.98
25	7734.41	8003.38	8068.78	7992.96	7837.76	7669.49	7390.88	7136.49	7005.69	6977.94	6823.55	6529.17	6117.41	6072.04	6304.12	6349.17	6088.83	5961.93	6307.32	6940.28	7251.47	7324.7	7332.9	7419.35	7734.41
26	7795.04	8025.11	8062.51	7972.42	7835.45	7710.17	7480.3	7210.96	6991.78	6905.18	6722.04	6454.89	6084.62	6038.1	6247.76	6270.15	6057.05	5945.99	6302.1	6889.98	7135.63	7236.2	7315.29	7471.85	7795.04
27	7897.43	8103.73	8122.45	8012.93	7884.37	7799.45	7607.45	7321.56	7025.72	6852.15	6641.79	6380.22	6049.27	5994.58	6166.72	6177.15	5999.95	5930.33	6290.66	6813.29	7021.1	7173.16	7323.11	7552.21	7897.43
28	8057.35	8268.6	8284.18	8148.71	8020.92	7958	7797.27	7478.96	7102.65	6837.17	6591.65	6324.79	6046.48	5969.72	6097.82	6092.17	5935.76	5918.37	6257.13	6717.4	6931.25	7139.81	7365.78	7665	8057.35
29	8303.22	8552.73	8538.65	8375.57	8264.65	8226.25	8046.55	7685.49	7219.34	6868.71	6572.2	6308.41	6077.77	5975.76	6055.44	6022.35	5879.01	5908.57	6221.76	6636.78	6876.5	7140.1	7443.84	7830.25	8303.22
30	8729.96	8975.1	8887.59	8682.6	8583.65	8595.68	8393.89	7944.46	7372.67	6934.97	6582.24	6324.15	6139.43	6025.41	6041.15	5980.76	5842.98	5920.09	6219.99	6601.96	6861.36	7171.91	7561.43	8063.7	8729.96
31	9310.93	9507.84	9319.84	9058.23	8982	9065.66	8917.29	8297.18	7578.51	7030.68	6627.34	6374.53	6231.12	6101.09	6058.58	5968.72	5838.05	5959.92	6259.87	6639.64	6884.43	7245.18	7746.98	8420.34	9310.93
32	9993.75	10167	9826.13	9510.29	9458.35	9644.01	9523.5	8786.78	7858.17	7175.33	6716.99	6460.92	6338.56	6204.08	6113.67	5982.23	5867.33	6035.47	6342.41	6677.21	6947.23	7362.86	8015.02	8951.31	9993.75
33	10749.9	10865.5	10404.1	10013.5	9991.35	10293.3	10223.8	9382.94	8208.89	7364.13	6837.46	6581.84	6449.98	6331.66	6188.34	6025.94	5925.68	6142.31	6488.99	6750.14	7053.11	7546.39	8377.32	9595.2	10749.9
34	11554.3	11625.1	11068.5	10579.5	10605.6	10999.4	10999.3	10074.6	8655.18	7617.19	6998.84	6745.51	6563.78	6464.83	6293.86	6096.63	6014.6	6303.65	6635.57	6905.55	7212.5	7795.75	8827.02	10312.4	11554.3
35	12366.1	12390.2	11753.5	11200.6	11280.5	11765.5	11793.5	10845.5	9200.54	7945.07	7220.55	6946.92	6834.42	6600.24	6423.77	6196.53	6144.08	6486.41	6827.44	7124.16	7436.11	8122	9376.52	11101.9	12366.1
36	13092.9	13095.2	12456.4	11840.2	11964.4	12531.4	12612.7	11619.8	9807.51	8309.75	7494.57	7199.16	7078.13	6853.81	6560.46	6329.22	6309.49	6670.47	7106.42	7410.26	7733.5	8529.48	10020.7	11897.5	13092.9
37	13767.8	13776	13177.6	12548.4	12690.3	13278.3	13353.9	12447.8	10516.7	8762.27	7833.96	7519.07	7376.89	7106.51	6746.23	6465.74	6489.1	6921.61	7454.99	7757.1	8095.62	9001.82	10715.9	12668	13767.8
38	14442.6	14456.8	13862.2	13268.2	13356.9	13961.3	14094.7	13218.5	11242	9267.64	8222.59	7901.47	7742.33	7404.8	6965.71	6606.52	6669.08</								

Page 13 of 17

Page 14 of 17

161	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
162	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
163	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
164	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
165	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
166	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
167	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
168	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
169	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
170	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
171	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
172	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
173	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
174	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
175	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
176	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
177	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
178	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
179	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
180	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

4.0 LM-79 Measurement and Test Results

4.3 THD and PF Test

Model No.	ALEDXL5T	Sample ID.	M1
Temperature (°C)	25.3	Humidity (%RH)	56.0

Test Method

The samples were tested according to the ANSI C82.77:2002.

The total harmonic distortion shall be measured to the 40th order.

The ambient temperature condition was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$. The sample measurements were made using a digital power meter and power supply. The sample was operated at rated voltage and was stabilized before measurement. The total harmonic distortion were calculated.

Test Results

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	THD
120.03	60	2.615	313.7	0.999	3.51%
276.97	60	1.173	310.6	0.956	11.22%

5.0 Equipment Information

Test Equipment			
Equipment ID	Equipment Name	Last Calibration Date	Calibration Due Date
DLF107	Integrating Sphere System	2020/12/26	2021/12/25
DLF108	Auxiliary Lamp	2020/12/26	2021/12/25
DLF122	Measurement Standard Lamp Standard Lamp Type: 220 V, 0.4720 A, Tungsten, Omni-derectional	2020/12/26	2021/12/25
DLF116	AC Power Source	2020/12/26	2021/12/25
DLF113	Power Meter	2020/12/26	2021/12/25
DLF112	Temperature Recorder	2020/12/26	2021/12/25
DLF114	Temperature & Humidity Datalogger	2020/12/26	2021/12/25
DLF101	Goniophotometer	2020/12/26	2021/12/25
DLF125	Standard Lamp Standard Lamp Type: 76.58 V, 6.7875 A, Tungsten, Omni-derectional	2020/12/26	2021/12/25
DLF104	AC Power Source	2020/12/26	2021/12/25
DLF507	DC Power Source	2020/12/26	2021/12/25
DLF102	Power Meter	2020/12/26	2021/12/25
DLF111	Temperature & Humidity Datalogger	2020/12/26	2021/12/25
DLF119	Power Meter	2020/12/26	2021/12/25
DLF031	Temperature data logger	2020/12/26	2021/12/25
DLF022	Digital power meter	2020/12/26	2021/12/25
DLF003	Temperature & Humidity Datalogger	2020/12/26	2021/12/25

***** End of Test Report*****