



Photometric Test Report

Relevant Standards

- ☒ IES LM-79-2019
- ☒ ANSI C82.77-10:2014

Prepared For

RAB Lighting Inc.

408 W 14th St, New York, NY 10014 United States

Xiao Xiang, 15921313292, Gary.Xiao@rablighting.com

Prepared By

Deliver Co., Ltd.

Block 11, 78 Keling Road, SSTP, Suzhou, China

0512-66801950, kevin.jia@szdeliver.com

Project Number

DLF2509110

Report Number

DLF2509110-48a

Test Date

2025/9/24

Issue Date

2025/9/26

Test By

Hengshan Li

Hengshan Li

Prepared By

Wangzun Zhu

Wangzun Zhu

Approved By

Kevin Jia

Kevin Jia

The results contained in this report pertain only to the tested sample.

This report shall not be reproduced, except in full, without written approval of Deliver Co., Ltd.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP.

1.0 Test Summary

DLC Technical Requirements v5.1

Indoor - Linear Ambient - Linear Ambient Luminaires (Indirect Component)				
Requirement Category	Test Method	Requirements		Test value
Luminaire Output (lm) (Goniophotometer - Section 4.2)	IES LM-79-2019	2000		5283
Lumen/ft (Goniophotometer - Section 4.2)	IES LM-79-2019	≥500		1321
Minimum Luminaire Efficacy (lm/W) (Goniophotometer - Section 4.2)	IES LM-79-2019	Standard 115	Premium 130	129.5
Power (Input Wattage) (W) (Goniophotometer - Section 4.2)	IES LM-79-2019	Worst Case		40.8
Total Harmonic Distortion (A%) (THD & PF - section 4.3)	ANSI C82.77-10: 2014	20.00%	120V	4.08%
		20.00%	277V	7.52%
Power Factor (THD & PF - section 4.3)	ANSI C82.77-10: 2014	0.9	120V	0.996
		0.9	277V	0.941
Allowable CCTs* (K) (Integrating Sphere - Section 4.1)	IES LM-79-2019	7 step	3045±175	2982
		4 step	3045±100	
Minimum CRI (Integrating Sphere - Section 4.1)	IES LM-79-2019 CIE 13.3-1995	≥80		94
Minimum R9 (Integrating Sphere - Section 4.1)	IES LM-79-2019 CIE 13.3-1995	≥0		62
Minimum Rf (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥70		91
Minimum Rg (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥89		101
Minimum IES Rcs,h1 (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	-12%≤IES Rcs,h1≤+23%		-5%
Zonal Lumen Requirement (90°-150°) (Goniophotometer - Section 4.2)	IES LM-79-2019	≥35%		18.80%
Corrected UGR (X=4H, Y=8H, 70/50/20%) (Goniophotometer - Section 4.2)	CIE 190-2010	<22		27.8
Input Voltage (V)				
(Goniophotometer - Section 4.2)	IES LM-79-2019	Worst Case		120
(Goniophotometer - Section 4.2)		Non-Worst Case		277
Input Current (A)				
(Goniophotometer - Section 4.2)	IES LM-79-2019	Worst Case		0.341
(Goniophotometer - Section 4.2)		Non-Worst Case		0.155
Power (Input Wattage - W)				
(Goniophotometer - Section 4.2)	IES LM-79-2019	Worst Case		40.8
(Goniophotometer - Section 4.2)		Non-Worst Case		40.4

2.0 Test List

Test Item	Test	Test Date	Model Number	Build Level	Sample No.
1	Integrating Sphere Test	2025/9/24	BOAE4PU @ 40W/3000K/70%/30%	N/A	DLF2509110-AV1
2	Goniophotometer Test	2025/9/24	BOAE4PU @ 40W/3000K/70%/30%	N/A	DLF2509110-AV1
3	THD and PF Test	2025/9/24	BOAE4PU @ 40W/3000K/70%/30%	N/A	DLF2509110-AV1

Remark(If any)

1. This report shall not be used by the client to claim product endorsement by NVLAP, NIST or any agency of the US government.

2. The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.


3.0 DUT Description

Model Number: BOAE4PU @ 40W/3000K/70%/30%

Electrical Rating: 120V-277V,50/60HZ

Received Date: 2025/9/22

Photos of Luminaire Characteristics

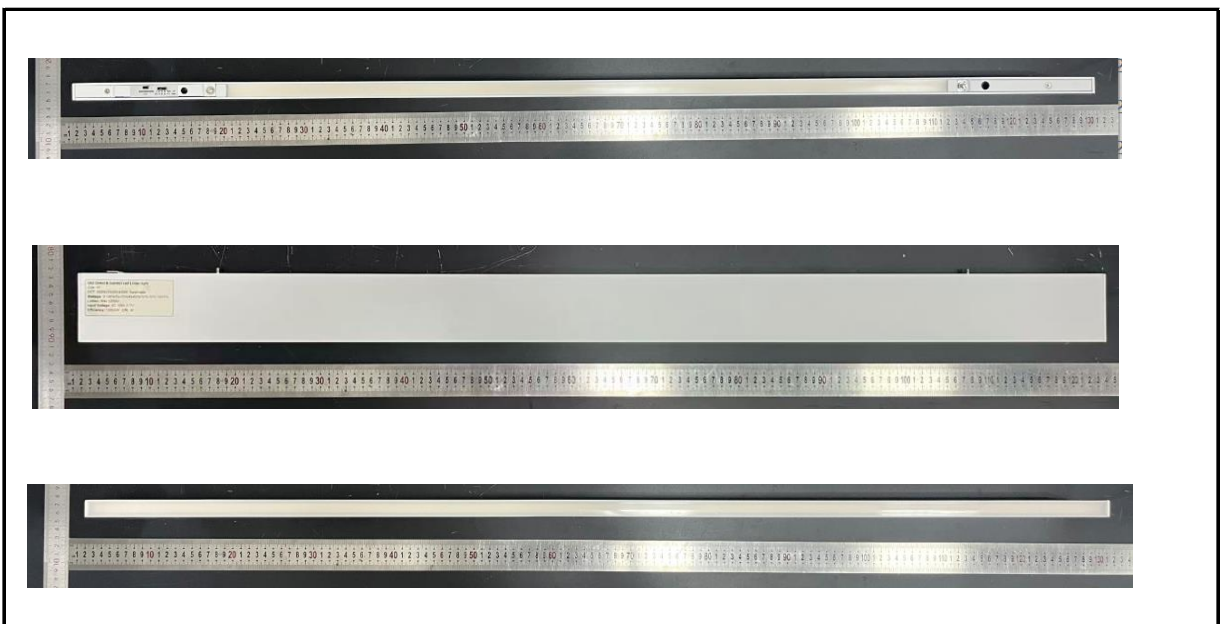

4.0 LM-79 Measurement and Test Results

4.1 Integrating Sphere Test

Model No.	BOAE4PU @ 40W/3000K/70%/30%	Sample ID.	DLF2509110-AV1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.2	Humidity (%RH)	55.2

Test Method

The samples were tested according to the IES LM-79-2019.

Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature and relative humidity condition inside the sphere was maintained at 25° C ± 1.2° C and 10% - 65% RH.

The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ±0.2 percent under load.

The sample was measured using 4π geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.

Test Result



Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
120.00	60	0.339	40.5	0.996
277.01	60	0.154	40.1	0.941

Test Result

CCT (K)	CRI	R9	Duv
2982	94	62	-0.0013

Rf	Rg	IES Rcs,h1
91	101	-5%

4.1 Integrating Sphere Test

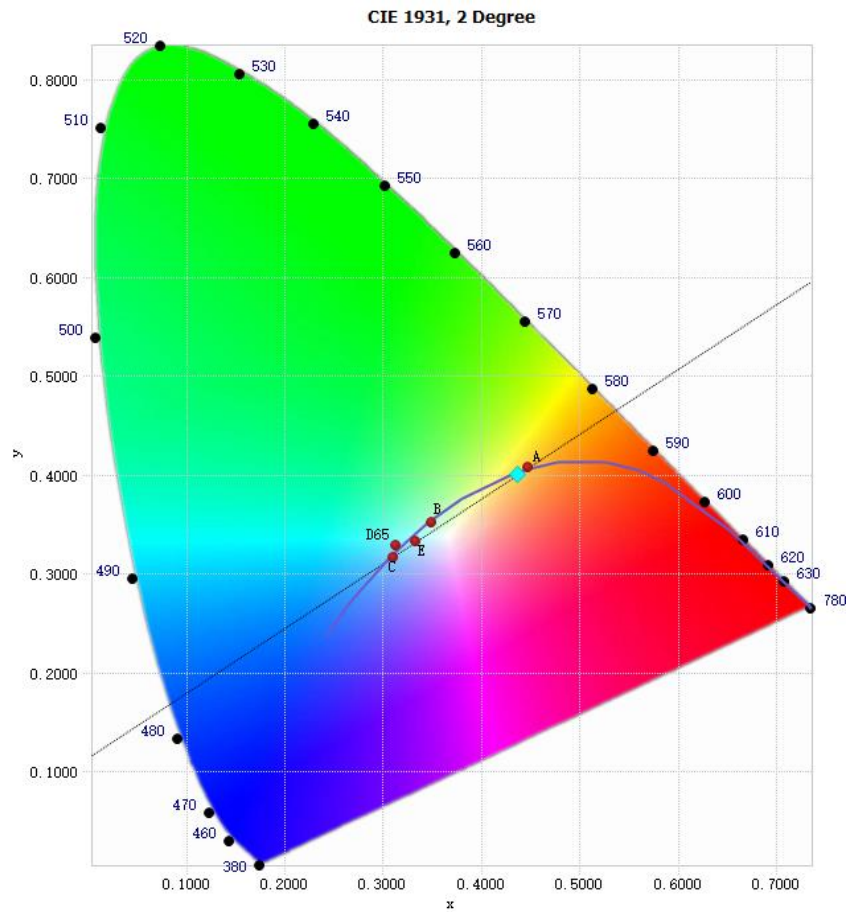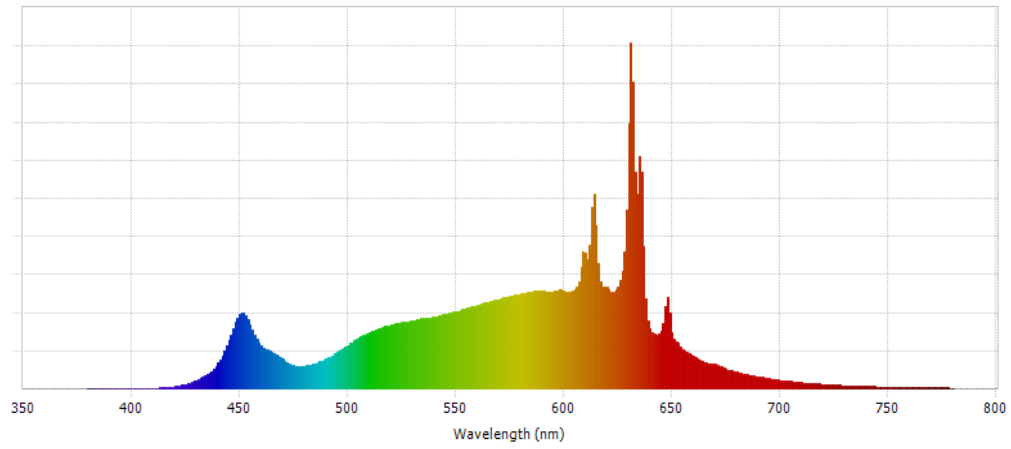

4.1 Integrating Sphere Test







IES TM-30-18 Color Rendition Report

Source: DLF2509110-48a

Manufacturer: RAB Lighting Inc.

Date: 2025/9/24

Model: BOAE4PU @ 40W/3000K/70%/30%

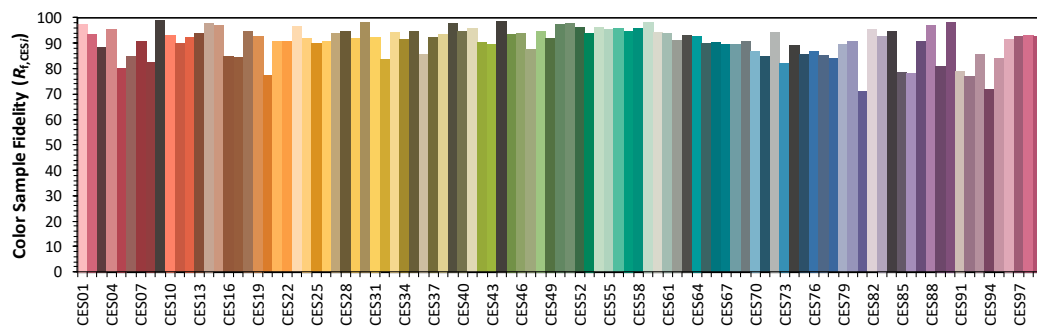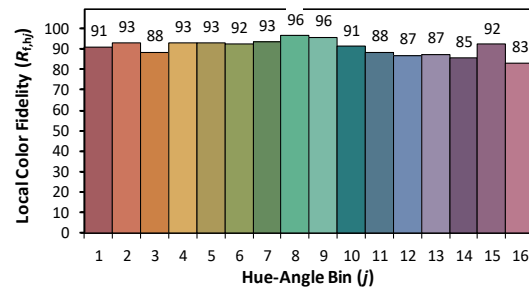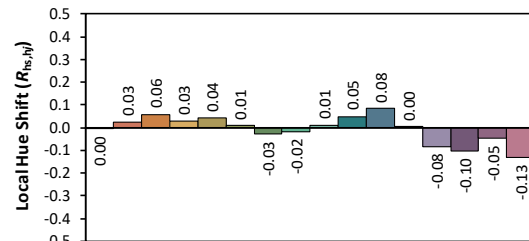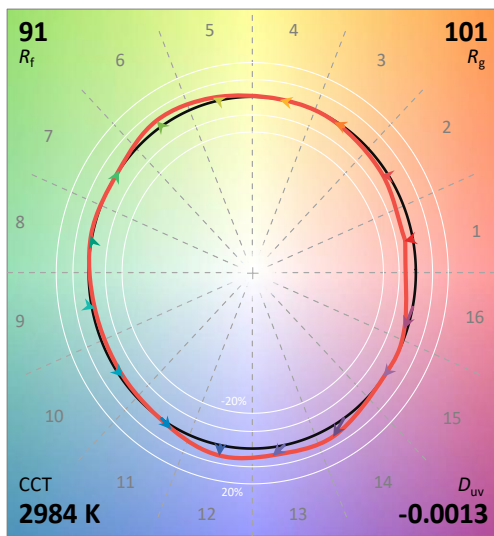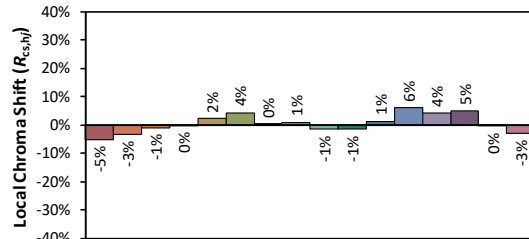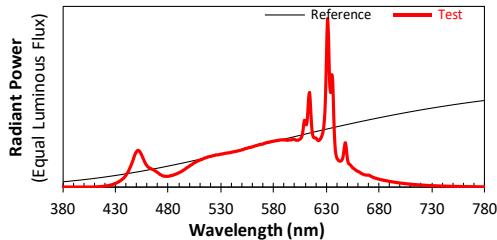

Notes: This is a recommended method for displaying IES TM-30-18 information.

x 0.4362

y 0.4006

u' 0.2516

v' 0.5199

CIE 13.3-1995
(CRI)

R_a 94

R_g 63

4.1 Integrating Sphere Test

Spectral Distribution over Visible Wavelength							
WL (nm)	Radiant (Watts/nm)	WL (nm)	Radiant (Watts/nm)	WL (nm)	Radiant (Watts/nm)	WL (nm)	Radiant (Watts/nm)
380	2.29E-04	485	2.28E-02	590	8.79E-02	695	9.18E-03
385	1.64E-04	490	2.69E-02	595	8.78E-02	700	7.67E-03
390	1.89E-04	495	3.26E-02	600	8.87E-02	705	6.51E-03
395	1.59E-04	500	3.94E-02	605	8.98E-02	710	5.51E-03
400	1.71E-04	505	4.57E-02	610	1.22E-01	715	4.70E-03
405	2.32E-04	510	5.05E-02	615	1.47E-01	720	3.97E-03
410	4.32E-04	515	5.45E-02	620	9.16E-02	725	3.34E-03
415	9.12E-04	520	5.73E-02	625	9.25E-02	730	2.81E-03
420	1.97E-03	525	6.03E-02	630	2.40E-01	735	2.40E-03
425	3.94E-03	530	6.17E-02	635	2.10E-01	740	2.04E-03
430	7.28E-03	535	6.34E-02	640	5.41E-02	745	1.71E-03
435	1.31E-02	540	6.53E-02	645	5.17E-02	750	1.44E-03
440	2.33E-02	545	6.71E-02	650	5.13E-02	755	1.25E-03
445	4.34E-02	550	6.97E-02	655	3.59E-02	760	1.04E-03
450	6.71E-02	555	7.29E-02	660	2.92E-02	765	9.77E-04
455	5.77E-02	560	7.54E-02	665	2.38E-02	770	7.69E-04
460	3.89E-02	565	7.84E-02	670	2.25E-02	775	6.56E-04
465	3.29E-02	570	8.06E-02	675	1.78E-02	780	5.86E-04
470	2.68E-02	575	8.36E-02	680	1.48E-02		
475	2.08E-02	580	8.57E-02	685	1.25E-02		
480	2.03E-02	585	8.75E-02	690	1.06E-02		

4.0 LM-79 Measurement and Test Results

4.2 Goniophotometer Test

Model No.	BOAE4PU @ 40W/3000K/70%/30%	Sample ID.	DLF2509110-AV1
Opreate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.1	Humidity (%RH)	55.0

Test Method

The samples were tested according to the IES LM-79-2019.

Photometric paramters were measured using a type C goniophotometer and software.

The ambient temperature shall be maintained at 25° C ± 1.2° C and 10% - 65% RH, measured at a point not more than 1 m from the sample and at the same height as the sample.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ±0.2 percent under load.

Airflow for the instantaneous tangential velocity of any point on the DUT shall be less than an upper tolerance limit of 0.20 m/s.

The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 0.5° vertical intervals and 10° horizontal intervals.

Test Conditions

Condition	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
WORST CASE	120.01	60	0.341	40.8	0.996
NON-WORST CASE	277.00	60	0.155	40.4	0.941


Test Result

Flux (lm)	Field Angle(10%)		Beam Angle(50%)		Luminous Efficacy (lm/W)
	C0-180	C90-270	C0-180	C90-270	
5283	360.0	360.0	82.7	107.3	129.5


Zonal Lumen Requirement (90°-150°)	UGR (X=4H, Y=8H, 70/50/20%)	Length(ft)	Lumen/ft
18.80%	27.8	4	1321

4.2 Goniophotometer Test

Light Distrubtion Curve

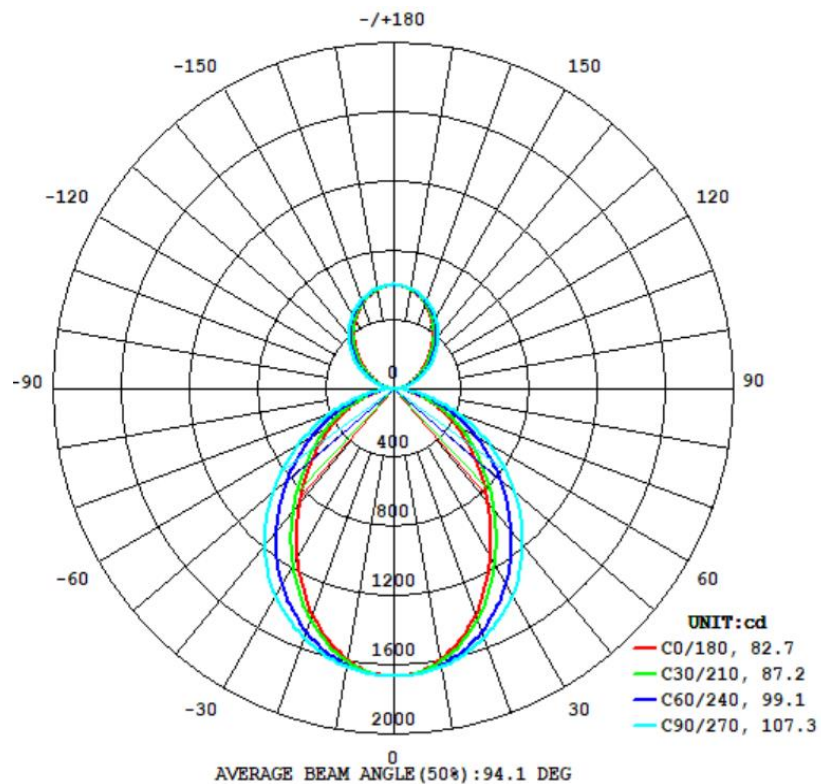

Isolux Plot

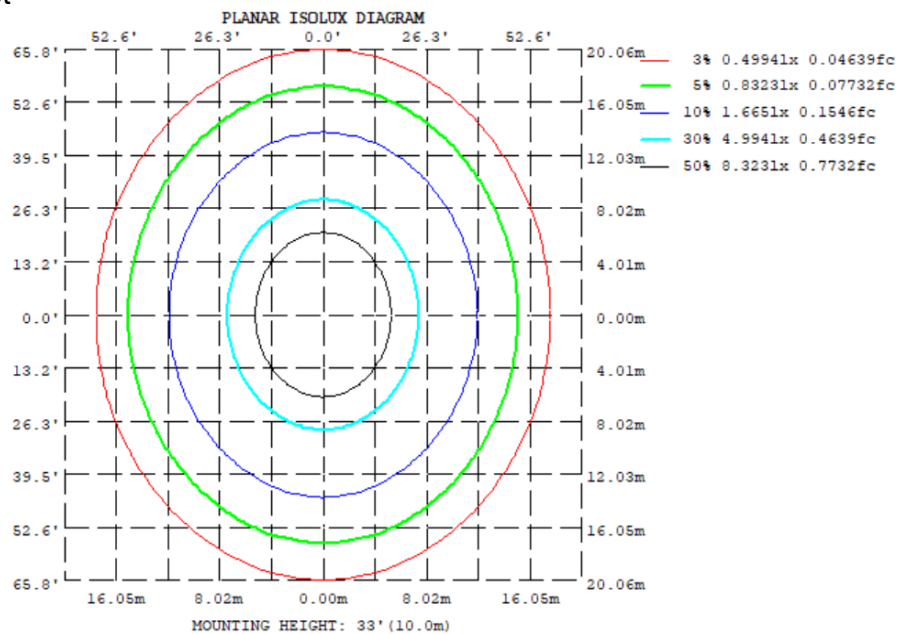

4.2 Goniophotometer Test

Zonal Lumen Summary

γ	C0	C45	C90	C135	C180	C225	C270	C315
10	1592	1612	1633	1612	1592	1612	1633	1612
20	1398	1464	1540	1464	1398	1464	1540	1464
30	1137	1250	1391	1250	1137	1250	1391	1250
40	865.7	994.7	1184	994.7	865.7	994.7	1184	994.7
50	627.9	740.0	931.1	740.0	627.9	740.0	931.1	740.0
60	421.3	506.1	656.1	506.1	421.3	506.1	656.1	506.1
70	236.9	287.7	379.6	287.7	236.9	287.7	379.6	287.7
80	82.28	97.46	123.0	97.46	82.28	97.46	123.0	97.46
90	0	0	0	0	0	0	0	0
100	32.08	37.19	42.19	37.19	32.08	37.19	42.19	37.19
110	92.49	108.3	128.4	108.3	92.49	108.3	128.4	108.3
120	171.0	195.2	224.5	195.2	171.0	195.2	224.5	195.2
130	261.7	290.1	322.2	290.1	261.7	290.1	322.2	290.1
140	360.7	387.1	414.8	387.1	360.7	387.1	414.8	387.1
150	457.2	475.6	494.6	475.6	457.2	475.6	494.6	475.6
160	536.2	545.6	555.1	545.6	536.2	545.6	555.1	545.6
170	587.4	589.8	592.2	589.8	587.4	589.8	592.2	589.8
180	605.1	605.1	605.1	605.1	605.1	605.1	605.1	605.1
DEG	LUMINOUS INTENSITY:cd							

UGR Table - Corrected

UGR Table - Corrected											
Reflectances											
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30	30
Walls	50	30	50	30	30	50	30	50	30	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20	20
Room Size											
X=2H Y=2H	UGR Viewed Crosswise					UGR Viewed Endwise					
3H	24.5	25.5	25.2	26.3	27.2	22.2	23.2	22.9	24.0	24.9	26.3
4H	26.1	27.1	26.9	27.9	28.8	23.6	24.6	24.4	25.3	26.3	26.7
6H	26.7	27.6	27.5	28.4	29.3	24.1	25.0	24.8	25.8	26.7	26.9
8H	27.0	27.8	27.8	28.6	29.6	24.3	25.2	25.1	26.0	26.9	27.0
12H	27.0	27.8	27.8	28.6	29.6	24.4	25.2	25.2	26.0	27.0	27.0
4H 2H	24.8	25.7	25.5	26.4	27.4	22.9	23.8	23.7	24.6	25.5	27.0
4H 3H	26.6	27.4	27.4	28.2	29.2	24.5	25.2	25.3	26.1	27.0	27.6
4H 4H	27.3	28.0	28.1	28.8	29.8	25.1	25.7	25.9	26.6	27.6	27.9
4H 6H	27.7	28.3	28.5	29.1	30.2	25.4	26.0	26.2	26.8	27.9	27.9
4H 8H	27.8	28.3	28.6	29.2	30.2	25.5	26.0	26.3	26.9	27.9	27.9
4H 12H	27.8	28.3	28.6	29.2	30.2	25.5	26.0	26.4	26.9	27.9	27.9
8H 4H	27.4	27.9	28.2	28.8	29.8	25.4	25.9	26.2	26.7	27.8	28.2
8H 6H	27.9	28.3	28.7	29.2	30.2	25.8	26.3	26.7	27.1	28.2	28.2
8H 8H	28.0	28.4	28.9	29.3	30.3	25.9	26.3	26.8	27.2	28.2	28.3
8H 12H	28.1	28.4	28.9	29.3	30.4	26.0	26.3	26.9	27.2	28.3	28.3
12H 4H	27.3	27.8	28.2	28.7	29.7	25.4	25.9	26.2	26.7	27.7	28.2
12H 6H	27.9	28.3	28.7	29.1	30.2	25.8	26.2	26.7	27.1	28.2	28.3
12H 8H	28.0	28.4	28.9	29.2	30.3	26.0	26.3	26.9	27.2	28.3	28.3
Maximum UGR = 30.4											

4.2 Goniophotometer Test

ZONAL LUMEN SUMMARY

	Zonal (lm)		Total (lm)	Percent
0-10	156.35	0 - 10	156.35	2.96%
10-20	435.91	0 - 20	592.26	11.21%
20-30	629.23	0 - 30	1221.49	23.12%
30-40	709.68	0 - 40	1931.17	36.56%
40-50	681.79	0 - 50	2612.96	49.46%
50-60	571.52	0 - 60	3184.48	60.28%
60-70	403.94	0 - 70	3588.42	67.93%
70-80	206.48	0 - 80	3794.90	71.83%
80-90	40.62	0 - 90	3835.52	72.60%
90-100	17.72	0 - 100	3853.24	72.94%
100-110	75.30	0 - 110	3928.54	74.36%
110-120	150.32	0 - 120	4078.86	77.21%
120-130	217.34	0 - 130	4296.20	81.32%
130-140	261.85	0 - 140	4558.05	86.28%
140-150	270.72	0 - 150	4828.77	91.40%
150-160	236.24	0 - 160	5065.01	95.88%
160-170	160.89	0 - 170	5225.90	98.92%
170-180	57.01	0 - 180	5282.91	100.00%

4.2 Goniophotometer Test


COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
Rw	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	113	113	113	113	107	107	107	107	96	96	96	86	86	86	77	77	77	73
1	103	99	95	92	98	94	91	88	85	82	80	76	75	73	69	67	66	62
2	94	87	81	76	89	83	77	73	75	71	67	68	64	61	61	58	56	53
3	86	77	69	63	82	73	66	61	66	61	57	60	56	52	54	51	48	45
4	79	68	60	54	75	65	58	52	59	53	49	54	49	45	49	45	42	39
5	73	61	53	47	69	58	51	45	53	47	42	49	43	39	44	40	37	34
6	67	55	47	41	64	53	45	40	48	42	37	44	39	35	40	36	32	30
7	63	50	42	36	59	48	40	35	44	38	33	40	35	31	37	32	29	27
8	58	46	38	32	55	44	36	31	40	34	30	37	32	28	34	29	26	24
9	54	42	34	29	52	40	33	28	37	31	27	34	29	25	31	27	24	22
10	51	39	31	26	48	37	30	26	34	28	24	32	27	23	29	25	22	20

CONE OF LIGHT DIAGRAM

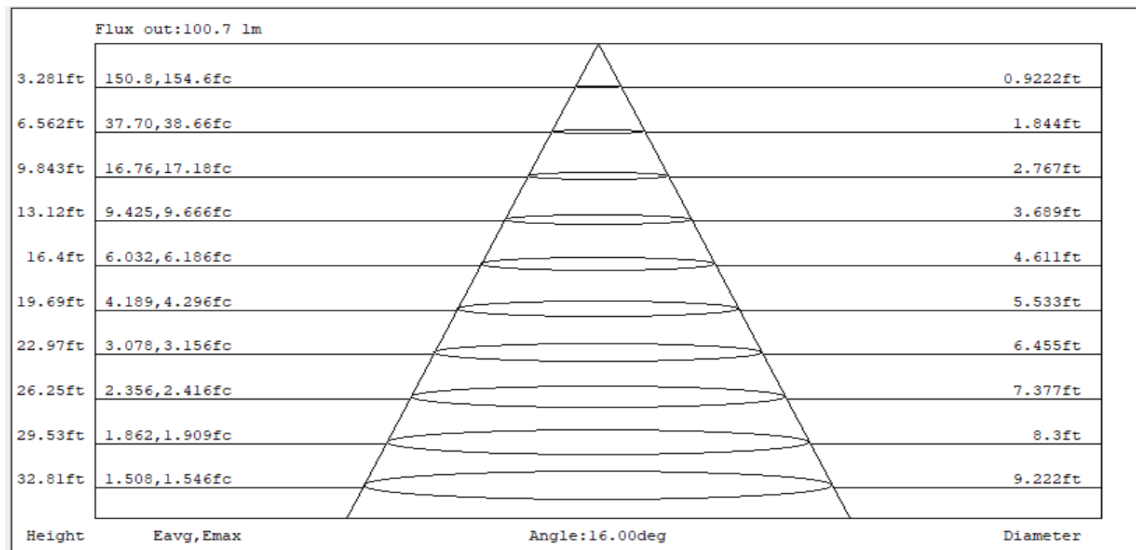

4.0 LM-79 Measurement and Test Results

4.3 THD and PF Test

Model No.	BOAE4PU @ 40W/3000K/70%/30%	Sample ID.	DLF2509110-AV1
Temperature (°C)	25.2	Humidity (%RH)	55.2

Test Method

The samples were tested according to the ANSI C82.77-10:2014.

The ambient temperature shall be maintained at 25° C ± 1.0° C and 10% - 65% RH. The sample measurements were made using a digital power meter and power supply. The sample was operated at rated voltage and was stabilized before measurement. The total harmonic distortion were calculated.

Test Results

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	THD
120.00	60	0.339	40.5	0.996	4.08%
277.01	60	0.154	40.1	0.941	7.52%

5.0 Equipment Information

Test Equipment			
Equipment ID	Equipment Name	Last Calibration Date	Calibration Due Date
DLF107	Integrating Sphere System	2024/12/23	2025/12/22
DLF108	Auxiliary Lamp	2024/12/23	2025/12/22
DLF122	Measurement Standard Lamp Standard Lamp Type: Tungsten, Omni-directional	2024/12/23	2025/12/22
DLF116	AC Power Source	2024/12/13	2025/12/12
DLF516	Power Meter	2024/12/13	2025/12/12
DLF112	Temperature Recorder	2024/12/19	2025/12/18
DLF114	Temperature & Humidity Datalogger	2024/12/19	2025/12/18
DLF521	Measurement Standard Lamp Standard Lamp Type: Tungsten, Omni-directional	2024/12/23	2025/12/22
DLF101	Goniophotometer	2024/12/23	2025/12/22
DLF511	AC Power Source	2024/12/13	2025/12/12
DLF512	AC Power Source	2024/12/13	2025/12/12
DLF513	AC Power Source	2024/12/13	2025/12/12
DLF507	DC Power Source	2024/12/13	2025/12/12
DLF111	Temperature & Humidity Datalogger	2024/12/19	2025/12/18
DLF119	Power Meter	2024/12/13	2025/12/12
DLF530	Hot-wire anemometer	2025/1/23	2026/1/22
DLF129	Clock	2025/9/4	2026/9/3

***** End of Test Report*****