

Photometric Test Report

Relevant Standards

- ☒ ANSI/IES LM-79-2019
- ☒ ANSI C82.77-2017

Prepared For

RAB Lighting Inc.

Address: 408 W 14th St New York, NY 10014

Prepared By

Dongguan New Testing Centre Co., Ltd.

Address: 3F No. 1 the 1st North Industry Road, Songshan Lake Science & Technology Park, Dongguan, Guangdong, China

Prepare by:

Alan Wang

Engineer: Alan Wang

Date: 2025-09-16

Review by:

Vincent Yuan

Technical Lead: Vincent Yuan

Issue Date: 2025-09-16

Revised Date: N/A

1.0 Test Summary

DLC Technical Requirements V6.0

Recessed Mount Luminaires					
Requirement Category		Test Method	Requirements		Test Value
Luminaire Output (lm) (Goniophotometer – Section 4.2)		ANSI/IES LM-79:2019	250		588
Minimum Luminaire Efficacy (lm/W) (Goniophotometer – Section 4.2)		ANSI/IES LM-79:2019	Standard	Premium	105.0
			95	110	
Power (Input Wattage) (W) (Goniophotometer – Section 4.2)		ANSI/IES LM-79:2019	Worst Case		5.6
Total Harmonic Distortion (A%) (THD & PF – Section 4.3)		ANSI C82.77:2002 ANSI C82-77-10:2020	20.00%	120V	17.55
Power Factor (THD & PF – Section 4.3)		ANSI C82.77:2002 ANSI C82-77-10:2020	0.9	120V	0.931
Allowable CCTs* (K) (Integrating Sphere – Section 4.1)		ANSI/IES LM-79:2019	7 steps	3985±275	3798
			4 steps	3985±154	
Minimum CRI (Integrating Sphere – Section 4.1)		ANSI/IES LM-79:2019 CIE13.3-1995	≥80		93.6
Minimum R9 (Integrating Sphere – Section 4.1)		ANSI/IES LM-79-2019 CIE13.3-1995	≥0		72
Minimum Rf (Integrating Sphere – Section 4.1)		ANSI/IES TM-30-18	≥70		89
Minimum Rg (Integrating Sphere – Section 4.1)		ANSI/IES TM-30-18	≥89		96
IES Rcs,h1 (Integrating Sphere – Section 4.1)		ANSI/IES TM-30-18	-12%≤IES Rcs,h1≤+23%		-4%
Zonal Lumen Requirement (0°-90°) (Goniophotometer – Section 4.2)		ANSI/IES LM-79:2019	≥85%		100.0%
Input Voltage (V)					
(Goniophotometer – Section 4.2)		ANSI/IES LM-79:2019	Worst Cast		120.0
(Goniophotometer – Section 4.2)			Non-Worst Case		N/A
Input Current (A)					
(Goniophotometer – Section 4.2)		ANSI/IES LM-79:2019	Worst Case		0.050
(Goniophotometer – Section 4.2)			Non-Worst Case		N/A
Power (Input Wattage – W)					
(Goniophotometer – Section 4.2)		ANSI/IES LM-79:2019	Worst Case		5.6
(Goniophotometer – Section 4.2)			Non-Worst Case		N/A

2.0 Test List

Test Item	Test	Test Date	Model Number	Build Level	Sample No.
1	Integrating Sphere Test	2025-09-15	COL6RM @4000K Black trim	-	250903014-S1
2	Goniophotometer Test	2025-09-15	COL6RM @4000K Black trim	-	250903014-S1
3	THD and PF Test	2025-09-15	COL6RM @4000K Black trim	-	250903014-S1

Remark (If any):


1. The results contained in this report pertain only to the tested samples.
2. This report shall not be reproduced, no limited part or full, without approval of Dongguan New Testing Centre Co., Ltd.
3. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. Government.

3.0 Product Description

Luminaire Description: Model No. COL6RM @4000K Black trim, color tunable from 3000K, 4000K and 5000K.

Electrical Specification: 120Vac, 60Hz

Photos of Luminaire Characteristics

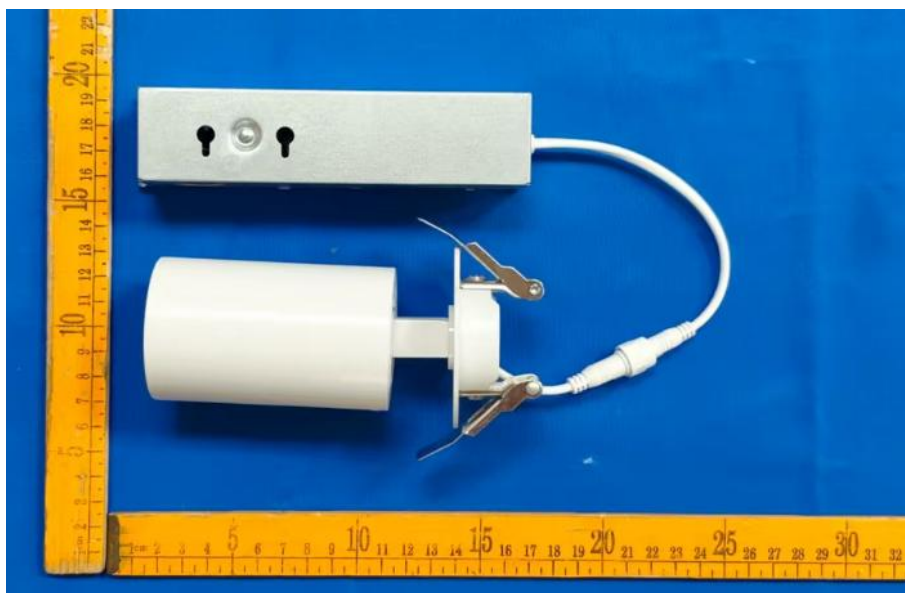

4.0 LM-79 Measurement and Test Results

4.1 Integrating Sphere Test

Model No.	COL6RM @4000K Black trim	Sample ID	250903014-S1
Operate time (Min.)	10	Stabilization time (Min.)	60
Temperature (°C)	25.4	Humidity (%RH)	41.0


Test Method
<p>The Samples were tested according to the ANSI/IES LM-79:2019.</p> <p>Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at 25±1°C.</p> <p>The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.</p> <p>The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ±0.2 percent under load.</p> <p>The sample was measured using 4π geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780nm.</p>

Test Result

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
120.0	60	0.050	5.6	0.931

CCT (K)	CRI	R9	Duv	SDCM	Rf	Rg	IES Rcs,h1
3798	93.6	72	-0.0020	5.0	89	96	-4%

4.1 Integrating Sphere Test

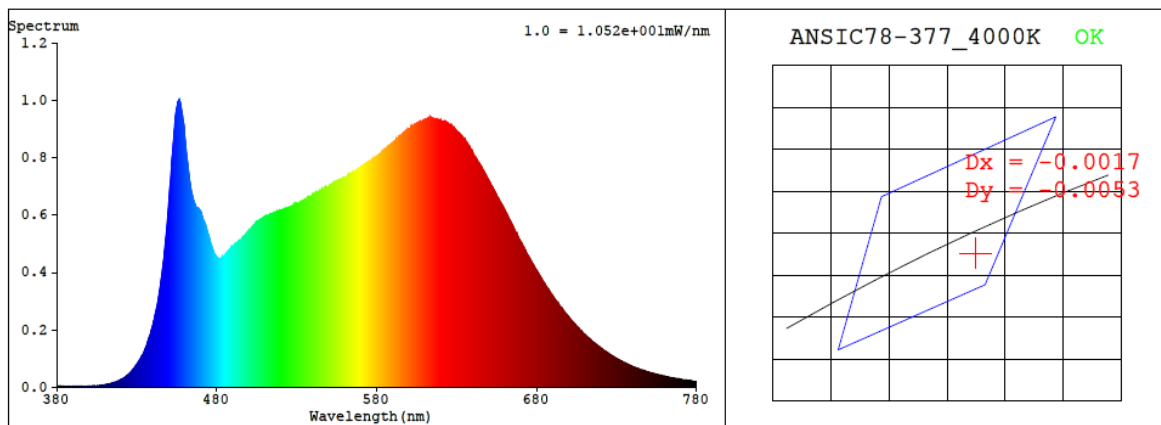

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.3881$ $y = 0.3770$ / $u' = 0.2300$ $v' = 0.5028$ ($duv = -2.00e-03$)

CCT= 3798K Prcp WL: $L_d = 580.9\text{nm}$ Purity=29.6%

Peak WL: $L_p = 456\text{nm}$ FWHM: $= 28.8\text{nm}$ Ratio: $R = 21.1\%$ $G = 74.1\%$ $B = 4.8\%$

Render Index: $R_a = 93.6$ AvgR = 92.1 TM30: $R_f = 91$ $R_g = 98$

EEL: 0.11633 A+

R1 =97 R2 =98 R3 =95 R4 =93 R5 =95 R6 =94 R7 =90

R8 =86 R9 =72 R10=97 R11=95 R12=77 R13=99 R14=98 R15=94

4.1 Integrating Sphere Test







ANSI/IES TM-30-18 Color Rendition Report

Source: 1 CIE F1

Manufacturer: RAB Lighting Inc.

Date: 2025/9/16

Model: COL6RM @4000K Black trim

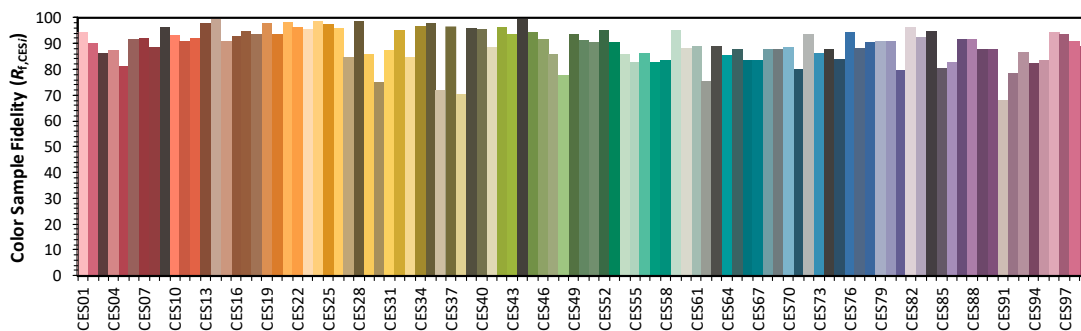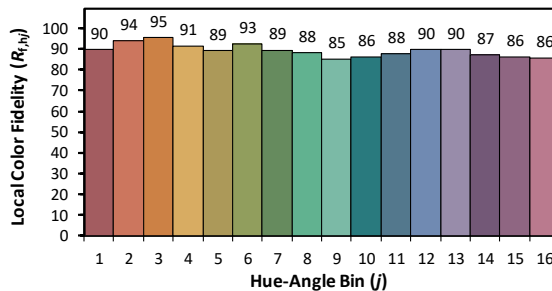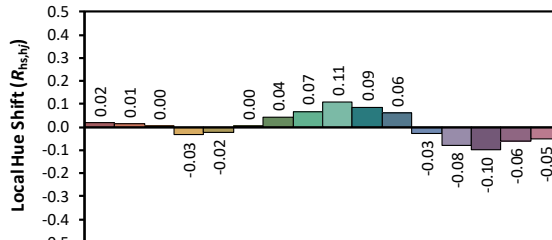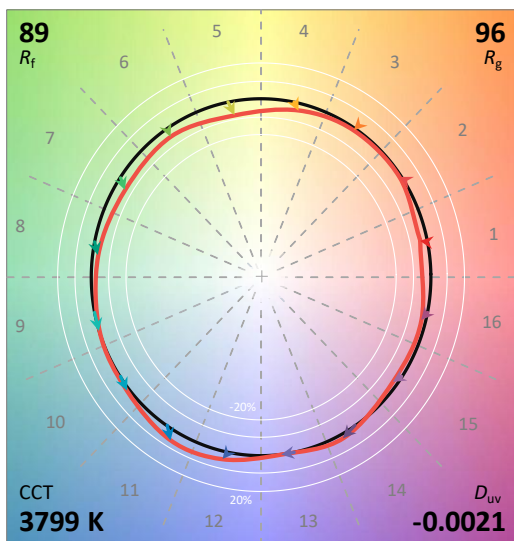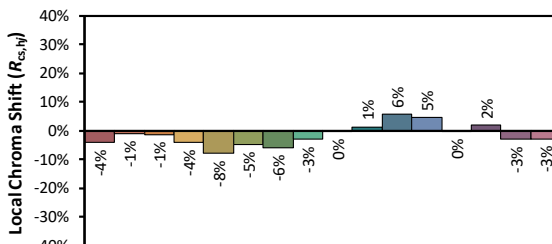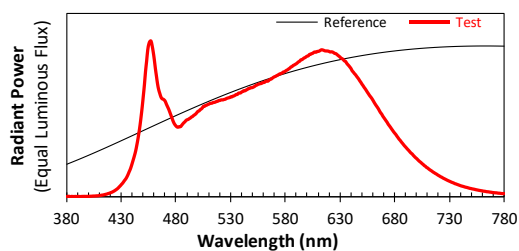

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.3881
 y 0.3769
 u' 0.2301
 v' 0.5028

CIE 13.3-1995
(CRI)
 R_a 94
 R_9 72

4.1 Integrating Sphere Test

Spectral Distribution over Visible Wavelength											
WL (nm)	Radiant (W/nm)	WL (nm)	Radiant (W/nm)	WL (nm)	Radiant (W/nm)	WL (nm)	Radiant (W/nm)	WL (nm)	Radiant (W/nm)	WL (nm)	Radiant (W/nm)
380	2.30E-06	447	4.60E-04	514	6.04E-04	581	8.09E-04	648	7.42E-04	715	1.59E-04
381	3.20E-06	448	5.17E-04	515	6.04E-04	582	8.13E-04	649	7.32E-04	716	1.55E-04
382	4.10E-06	449	5.78E-04	516	6.07E-04	583	8.18E-04	650	7.20E-04	717	1.50E-04
383	1.10E-06	450	6.47E-04	517	6.10E-04	584	8.23E-04	651	7.11E-04	718	1.47E-04
384	3.00E-06	451	7.19E-04	518	6.11E-04	585	8.30E-04	652	7.00E-04	719	1.42E-04
385	3.00E-06	452	8.03E-04	519	6.16E-04	586	8.33E-04	653	6.91E-04	720	1.37E-04
386	2.40E-06	453	8.68E-04	520	6.16E-04	587	8.40E-04	654	6.80E-04	721	1.33E-04
387	2.60E-06	454	9.39E-04	521	6.20E-04	588	8.43E-04	655	6.69E-04	722	1.29E-04
388	3.10E-06	455	9.76E-04	522	6.20E-04	589	8.47E-04	656	6.58E-04	723	1.26E-04
389	2.10E-06	456	9.94E-04	523	6.20E-04	590	8.52E-04	657	6.48E-04	724	1.21E-04
390	3.10E-06	457	9.96E-04	524	6.23E-04	591	8.57E-04	658	6.39E-04	725	1.18E-04
391	3.00E-06	458	9.68E-04	525	6.24E-04	592	8.63E-04	659	6.29E-04	726	1.14E-04
392	2.30E-06	459	9.27E-04	526	6.29E-04	593	8.67E-04	660	6.18E-04	727	1.10E-04
393	2.50E-06	460	8.79E-04	527	6.31E-04	594	8.76E-04	661	6.06E-04	728	1.07E-04
394	3.20E-06	461	8.21E-04	528	6.33E-04	595	8.77E-04	662	5.94E-04	729	1.03E-04
395	3.20E-06	462	7.71E-04	529	6.35E-04	596	8.82E-04	663	5.84E-04	730	1.00E-04
396	3.50E-06	463	7.22E-04	530	6.40E-04	597	8.88E-04	664	5.74E-04	731	9.72E-05
397	3.20E-06	464	6.86E-04	531	6.39E-04	598	8.90E-04	665	5.63E-04	732	9.38E-05
398	3.30E-06	465	6.62E-04	532	6.44E-04	599	8.96E-04	666	5.50E-04	733	9.13E-05
399	3.50E-06	466	6.40E-04	533	6.46E-04	600	9.00E-04	667	5.38E-04	734	8.85E-05
400	3.60E-06	467	6.28E-04	534	6.50E-04	601	9.02E-04	668	5.30E-04	735	8.48E-05
401	4.10E-06	468	6.25E-04	535	6.55E-04	602	9.11E-04	669	5.17E-04	736	8.28E-05
402	4.30E-06	469	6.20E-04	536	6.55E-04	603	9.11E-04	670	5.07E-04	737	8.00E-05
403	4.70E-06	470	6.11E-04	537	6.63E-04	604	9.16E-04	671	4.97E-04	738	7.75E-05
404	5.40E-06	471	5.94E-04	538	6.64E-04	605	9.18E-04	672	4.87E-04	739	7.48E-05
405	5.50E-06	472	5.78E-04	539	6.65E-04	606	9.24E-04	673	4.77E-04	740	7.21E-05
406	5.90E-06	473	5.63E-04	540	6.71E-04	607	9.26E-04	674	4.65E-04	741	6.98E-05
407	6.70E-06	474	5.45E-04	541	6.74E-04	608	9.24E-04	675	4.55E-04	742	6.80E-05
408	6.80E-06	475	5.26E-04	542	6.80E-04	609	9.29E-04	676	4.46E-04	743	6.60E-05
409	7.60E-06	476	5.08E-04	543	6.78E-04	610	9.30E-04	677	4.35E-04	744	6.37E-05
410	8.80E-06	477	4.88E-04	544	6.83E-04	611	9.32E-04	678	4.26E-04	745	6.17E-05
411	9.80E-06	478	4.72E-04	545	6.86E-04	612	9.37E-04	679	4.16E-04	746	6.04E-05
412	1.12E-05	479	4.61E-04	546	6.92E-04	613	9.40E-04	680	4.07E-04	747	5.82E-05
413	1.22E-05	480	4.52E-04	547	6.93E-04	614	9.39E-04	681	3.99E-04	748	5.62E-05
414	1.38E-05	481	4.47E-04	548	6.98E-04	615	9.37E-04	682	3.88E-04	749	5.43E-05
415	1.55E-05	482	4.46E-04	549	6.98E-04	616	9.34E-04	683	3.79E-04	750	5.30E-05
416	1.73E-05	483	4.50E-04	550	7.00E-04	617	9.33E-04	684	3.69E-04	751	5.11E-05
417	1.91E-05	484	4.49E-04	551	7.03E-04	618	9.32E-04	685	3.61E-04	752	4.99E-05
418	2.20E-05	485	4.57E-04	552	7.07E-04	619	9.32E-04	686	3.51E-04	753	4.84E-05
419	2.34E-05	486	4.66E-04	553	7.13E-04	620	9.29E-04	687	3.43E-04	754	4.66E-05
420	2.69E-05	487	4.74E-04	554	7.15E-04	621	9.26E-04	688	3.34E-04	755	4.51E-05
421	2.94E-05	488	4.80E-04	555	7.20E-04	622	9.27E-04	689	3.26E-04	756	4.37E-05
422	3.28E-05	489	4.88E-04	556	7.22E-04	623	9.26E-04	690	3.18E-04	757	4.22E-05
423	3.67E-05	490	4.93E-04	557	7.24E-04	624	9.22E-04	691	3.10E-04	758	4.09E-05
424	4.09E-05	491	4.95E-04	558	7.25E-04	625	9.17E-04	692	3.02E-04	759	3.97E-05
425	4.59E-05	492	5.00E-04	559	7.29E-04	626	9.16E-04	693	2.95E-04	760	3.86E-05
426	5.09E-05	493	5.04E-04	560	7.31E-04	627	9.11E-04	694	2.87E-04	761	3.69E-05
427	5.71E-05	494	5.10E-04	561	7.33E-04	628	9.05E-04	695	2.79E-04	762	3.62E-05
428	6.47E-05	495	5.14E-04	562	7.40E-04	629	8.99E-04	696	2.74E-04	763	3.50E-05
429	7.17E-05	496	5.21E-04	563	7.40E-04	630	8.93E-04	697	2.65E-04	764	3.34E-05
430	8.00E-05	497	5.25E-04	564	7.40E-04	631	8.86E-04	698	2.58E-04	765	3.29E-05
431	8.75E-05	498	5.31E-04	565	7.46E-04	632	8.83E-04	699	2.51E-04	766	3.21E-05
432	9.72E-05	499	5.39E-04	566	7.51E-04	633	8.76E-04	700	2.45E-04	767	3.07E-05
433	1.07E-04	500	5.47E-04	567	7.53E-04	634	8.69E-04	701	2.38E-04	768	3.00E-05
434	1.16E-04	501	5.50E-04	568	7.59E-04	635	8.66E-04	702	2.31E-04	769	2.86E-05
435	1.29E-04	502	5.57E-04	569	7.64E-04	636	8.54E-04	703	2.25E-04	770	2.78E-05
436	1.43E-04	503	5.62E-04	570	7.68E-04	637	8.46E-04	704	2.20E-04	771	2.69E-05
437	1.60E-04	504	5.69E-04	571	7.71E-04	638	8.38E-04	705	2.13E-04	772	2.62E-05
438	1.76E-04	505	5.79E-04	572	7.75E-04	639	8.29E-04	706	2.07E-04	773	2.59E-05
439	1.97E-04	506	5.79E-04	573	7.78E-04	640	8.20E-04	707	2.00E-04	774	2.47E-05
440	2.19E-04	507	5.85E-04	574	7.83E-04	641	8.06E-04	708	1.96E-04	775	2.37E-05
441	2.43E-04	508	5.87E-04	575	7.86E-04	642	7.98E-04	709	1.89E-04	776	2.35E-05
442	2.67E-04	509	5.91E-04	576	7.89E-04	643	7.89E-04	710	1.85E-04	777	2.23E-05
443	2.95E-04	510	5.93E-04	577	7.92E-04	644	7.82E-04	711	1.79E-04	778	2.14E-05
444	3.30E-04	511	5.98E-04	578	7.98E-04	645	7.72E-04	712	1.74E-04	779	2.12E-05
445	3.68E-04	512	5.98E-04	579	7.99E-04	646	7.62E-04	713	1.69E-04	780	2.13E-05
446	4.11E-04	513	6.00E-04	580	8.04E-04	647	7.53E-04	714	1.65E-04	N/A	N/A

4.0 LM-79 Measurement and Test Results

4.2 Goniophotometer Test

Model No.	COL6RM @4000K Black trim	Sample ID	250903014-S1
Operate time (Min.)	30	Stabilization time (Min.)	60
Temperature (°C)	25.0	Humidity (%RH)	40.8

Test Method
<p>The Samples were tested according to the ANSI/IES LM-79:2019.</p> <p>Photometric parameters were measured using a type C goniophotometer and software.</p> <p>The ambient temperature shall be maintained at $25 \pm 1^\circ\text{C}$, measured at a point not more than 1 m from the sample and at the same height as the sample.</p> <p>The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.</p> <p>The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 1.0° vertical intervals and 15° horizontal intervals.</p>

Test Conditions

Condition	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
WORST CASE	120.0	60	0.050	5.6	0.931
NON-WORST CASE	N/A	N/A	N/A	N/A	N/A


Test Result

Flux (lm)	Field Angle (10%)		Beam Angle (50%)		Luminous Efficacy (lm/W)	Zonal Lumen Requirement
	C0-180	C90-270	C0-180	C90-270		(0°-90°)
588	64.7	64.7	35.8	35.6	105.0	100.0%


4.2 Goniophotometer Test

Lighting Distribution Curve

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

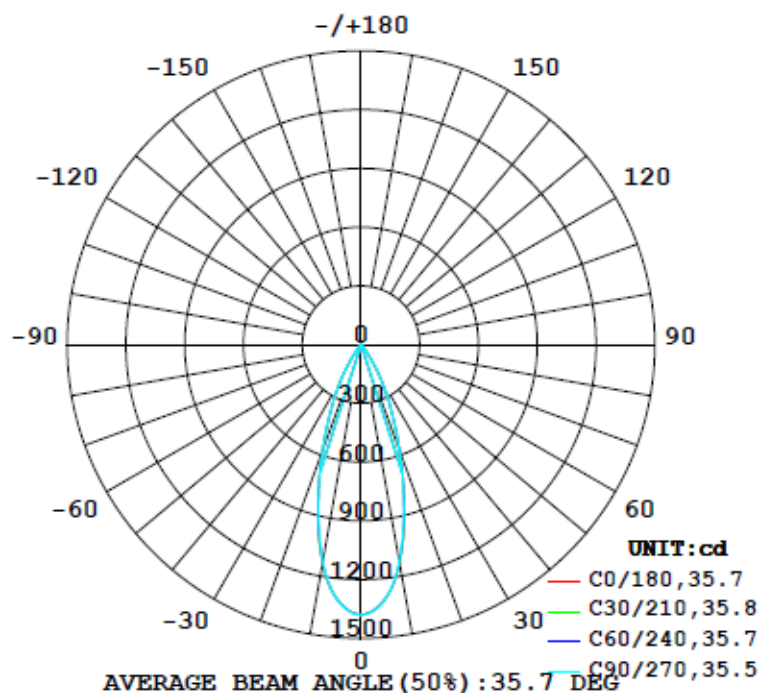

Isolux Plot

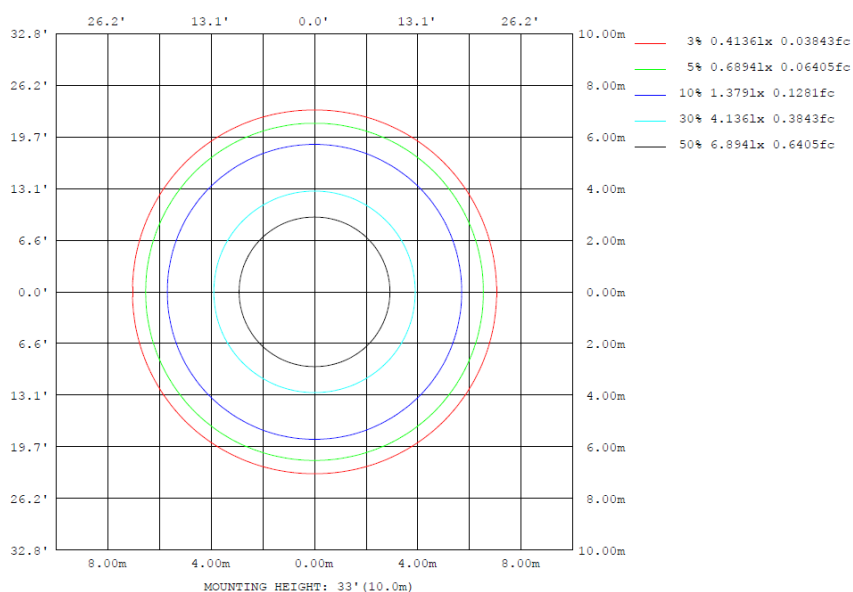

4.2 Goniophotometer Test

Zonal Lumen Summary

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum, lamp
10	1134	1130	1124	1130	1134	1130	1124	1130	0- 10	119.8	119.8	20.4,20.4
20	575.0	577.5	573.8	577.5	575.0	577.5	573.8	577.5	10- 20	232.8	352.5	60,60
30	200.1	204.5	201.8	204.5	200.1	204.5	201.8	204.5	20- 30	166.6	519.1	88.3,88.3
40	12.18	12.26	12.83	12.26	12.18	12.26	12.83	12.26	30- 40	53.00	572.1	97.3,97.3
50	6.068	5.785	5.543	5.785	6.068	5.785	5.543	5.785	40- 50	5.874	578.0	98.3,98.3
60	4.730	4.427	4.071	4.427	4.730	4.427	4.071	4.427	50- 60	4.565	582.5	99.1,99.1
70	2.871	2.610	2.302	2.610	2.871	2.610	2.302	2.610	60- 70	3.626	586.2	99.7,99.7
80	0.0877	0.0763	0.0766	0.0763	0.0877	0.0763	0.0766	0.0763	70- 80	1.499	587.7	100,100
90	0	0	0	0	0	0	0	0	80- 90	0.0321	587.7	100,100
100	0	0	0	0	0	0	0	0	90-100	0	587.7	100,100
110	0	0	0	0	0	0	0	0	100-110	0	587.7	100,100
120	0	0	0	0	0	0	0	0	110-120	0	587.7	100,100
130	0	0	0	0	0	0	0	0	120-130	0	587.7	100,100
140	0	0	0	0	0	0	0	0	130-140	0	587.7	100,100
150	0	0	0	0	0	0	0	0	140-150	0	587.7	100,100
160	0	0	0	0	0	0	0	0	150-160	0	587.7	100,100
170	0	0	0	0	0	0	0	0	160-170	0	587.7	100,100
180	0	0	0	0	0	0	0	0	170-180	0	587.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

	Zonal (lm)		Total (lm)	Percent
0-10	119.77	0-10	119.77	20.38%
10-20	232.75	0-20	352.52	59.99%
20-30	166.57	0-30	519.09	88.33%
30-40	53.00	0-40	572.09	97.35%
40-50	5.87	0-50	577.96	98.35%
50-60	4.56	0-60	582.52	99.12%
60-70	3.63	0-70	586.15	99.74%
70-80	1.50	0-80	587.65	99.99%
80-90	0.03	0-90	587.68	100.00%
90-100	0.00	0-100	587.68	100.00%
100-110	0.00	0-110	587.68	100.00%
110-120	0.00	0-120	587.68	100.00%
120-130	0.00	0-130	587.68	100.00%
130-140	0.00	0-140	587.68	100.00%
140-150	0.00	0-150	587.68	100.00%
150-160	0.00	0-160	587.68	100.00%
160-170	0.00	0-170	587.68	100.00%
170-180	0.00	0-180	587.68	100.00%

4.2 Goniophotometer Test

Luminous Distribution Intensity Data

Table--1

UNIT: cd

C (DEG) y (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	1379	1379	1379	1379	1379	1379	1380	1379	1379	1379	1379	1379	1379	1379	1379	1379	1379	1379	1380
5	1314	1315	1316	1316	1317	1317	1317	1317	1317	1316	1316	1315	1314	1315	1316	1316	1317	1317	1317
10	1134	1133	1132	1130	1129	1127	1124	1127	1129	1130	1132	1133	1134	1133	1132	1130	1129	1127	1124
15	853	853	852	851	848	846	843	846	848	851	852	853	853	853	852	851	848	846	843
20	575	577	578	577	577	576	574	576	577	577	578	577	575	577	578	577	576	574	575
25	356	359	361	363	363	364	364	364	363	363	361	359	356	359	361	363	363	364	364
30	200	202	205	204	203	203	202	203	203	204	205	202	200	202	205	204	203	202	200
35	78.9	79.8	81.0	81.9	81.0	79.7	78.6	79.7	81.0	81.9	81.0	79.8	78.9	79.8	81.0	81.9	81.0	79.7	78.6
40	12.2	12.2	12.1	12.3	12.6	12.7	12.8	12.7	12.6	12.3	12.1	12.2	12.2	12.2	12.1	12.3	12.6	12.7	12.8
45	7.16	7.12	7.08	7.03	7.02	7.00	6.96	7.00	7.02	7.03	7.08	7.12	7.16	7.12	7.08	7.03	7.02	7.00	6.96
50	6.07	5.98	5.86	5.78	5.71	5.64	5.54	5.64	5.71	5.78	5.86	5.98	6.07	5.98	5.86	5.78	5.71	5.64	5.54
55	5.48	5.37	5.23	5.11	5.01	4.92	4.79	4.92	5.01	5.11	5.23	5.37	5.48	5.37	5.23	5.11	5.01	4.92	4.79
60	4.73	4.66	4.57	4.43	4.32	4.21	4.07	4.21	4.32	4.43	4.57	4.66	4.73	4.66	4.57	4.43	4.32	4.21	4.07
65	4.08	4.02	3.95	3.81	3.68	3.57	3.42	3.57	3.68	3.81	3.95	4.02	4.08	4.02	3.95	3.81	3.68	3.57	3.42
70	2.87	2.81	2.74	2.61	2.51	2.43	2.30	2.43	2.51	2.61	2.74	2.81	2.87	2.81	2.74	2.61	2.51	2.43	2.30
75	1.83	1.75	1.63	1.50	1.36	1.22	1.15	1.22	1.36	1.50	1.63	1.75	1.83	1.75	1.63	1.50	1.36	1.22	1.15
80	0.09	0.08	0.08	0.08	0.07	0.07	0.08	0.07	0.07	0.08	0.08	0.08	0.09	0.08	0.08	0.08	0.07	0.07	0.08
85	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Table--2

UNIT: cd

C (DEG) y (DEG)	285	300	315	330	345														
0	1379	1379	1379	1379	1379														
5	1317	1317	1316	1316	1315														
10	1127	1129	1130	1132	1133														
15	846	848	851	852	853														
20	576	577	577	578	577														
25	364	363	363	361	359														
30	203	203	204	205	202														
35	79.7	81.0	81.9	81.0	79.8														
40	12.7	12.6	12.3	12.1	12.2														
45	7.00	7.02	7.03	7.08	7.12														
50	5.64	5.71	5.78	5.86	5.98														
55	4.92	5.01	5.11	5.23	5.37														
60	4.21	4.32	4.43	4.57	4.66														
65	3.57	3.68	3.81	3.95	4.02														
70	2.43	2.51	2.61	2.74	2.81														
75	1.22	1.36	1.50	1.63	1.75														
80	0.07	0.07	0.08	0.08	0.08														
85	0.03	0.03	0.03	0.03	0.03														
90	0.00	0.00	0.00	0.00	0.00														
95	0.00	0.00	0.00	0.00	0.00														
100	0.00	0.00	0.00	0.00	0.00														
105	0.00	0.00	0.00	0.00	0.00														
110	0.00	0.00	0.00	0.00	0.00														
115	0.00	0.00	0.00	0.00	0.00														
120	0.00	0.00	0.00	0.00	0.00														
125	0.00	0.00	0.00	0.00	0.00														
130	0.00	0.00	0.00	0.00	0.00														
135	0.00	0.00	0.00	0.00	0.00														
140	0.00	0.00	0.00	0.00	0.00														
145	0.00	0.00	0.00	0.00	0.00														
150	0.00	0.00	0.00	0.00	0.00														
155	0.00	0.00	0.00	0.00	0.00														
160	0.00	0.00	0.00	0.00	0.00														
165	0.00	0.00	0.00	0.00	0.00														
170	0.00	0.00	0.00	0.00	0.00														
175	0.00	0.00	0.00	0.00	0.00														
180	0.00	0.00	0.00	0.00	0.00														

4.0 LM-79 Measurement and Test Results

4.3 THD and PF Test

Model No.	COL6RM @4000K Black trim	Sample ID	250903014-S1
Temperature (°C)	25.4	Humidity (%RH)	41.0

Test Method
<p>The samples were tested according to the and ANSI C82.77: 2002 and ANSI C82.77-10:2020</p> <p>The total harmonic distortion shall be measured to the 40th order.</p> <p>The ambient temperature shall be maintained at 25±1°C. The sample measurements were made using a digital power meter and power supply. The sample was operated at rated voltage and was stabilized before measurement. The total harmonic distortion was calculated.</p>

Test Results

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	iTHD(%)
120.0	60	0.050	5.6	0.931	17.55

5.0 Equipment List:

Equipment ID	Equipment Name	Last Cal.	Due Cal.
NTC-F01-001	Goniophotometer System	2024-11-07	2025-11-06
NTC-F01-006	2.0 meter Integrating Sphere	2024-11-07	2025-11-06
NTC-F01-012	Standard Lamp	2024-10-28	2025-10-27
NTC-F01-013	Standard Lamp	2024-10-28	2025-10-27
NTC-F01-031	Digital Power Meter	2025-08-04	2026-08-03
NTC-F01-019	Temperature & Humidity Meter	2024-10-29	2025-10-28

*****End of Report*****