

Photometric Test Report

Relevant Standards

- ☒ IES LM-79-2008
- ☒ ANSI C82.77:2017

Prepared For

RAB Lighting Inc.

Room 6A33, No.1388, Wuzhong road, Shanghai, China

Xiao Xiang, 15921313292, Gary.Xiao@rabweb.com

Prepared By

Deliver Co., Ltd.

Block 11, 78 Keling Road, SSTP, Suzhou, China

0512-66801950, kevin.jia@szdeliver.com

Project Number

DLF2305110

Report Number

DLF2305110-4a


Test Date

2023/5/23

Issue Date


2023/5/25

Prepared By



Wangzun Zhu

Approved By



Kevin Jia

The results contained in this report pertain only to the tested sample.

This report shall not be reproduced, except in full, without written approval of Deliver Co., Ltd.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP.

1.0 Test Summary

DLC Technical Requirements v5.1

Indoor - Linear Ambient - Direct Linear Ambient Luminaires				
Requirement Category	Test Method	Requirements		Test value
Luminaire Output (lm) (Goniophotometer - Section 4.2)	IES LM-79-2008	750		1550
Lumen/ft (Goniophotometer - Section 4.2)	IES LM-79-2008	≥375		775
Minimum Luminaire Efficacy (lm/W) (Goniophotometer - Section 4.2)	IES LM-79-2008	Standard 115	Premium 130	130.2
Power (Input Wattage) (W) (Goniophotometer - Section 4.2)	IES LM-79-2008	Wrost Case		11.9
Total Harmonic Distortion (A%) (THD & PF - section 4.3)	ANSI C82.77:2014	20.00%	120V	13.27%
		20.00%	277V	14.71%
Power Factor (THD & PF - section 4.3)	ANSI C82.77:2014	0.9	120V	0.987
		0.9	277V	0.915
Allowable CCTs* (K) (Integrating Sphere - Section 4.1)	IES LM-79-2008	7 step	3465±245	3462
		4 step	3465±124	
Minimum CRI (Integrating Sphere - Section 4.1)	IES LM-79-2008 CIE 13.3-1995	≥80		84
Minimum R9 (Integrating Sphere - Section 4.1)	IES LM-79-2008 CIE 13.3-1995	≥0		14
Minimum Rf (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥70		85
Minimum Rg (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥89		98
Minimum IES Rcs,h1 (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	-12%≤IES Rcs,h1≤+23%		-11%
Zonal Lumen Requirement (0°-60°) (Goniophotometer - Section 4.2)	IES LM-79-2008	≥40%		73.96%
Corrected UGR (X=4H, Y=8H, 70/50/20%) (Goniophotometer - Section 4.2)	CIE 190-2010	<22		21.3
Input Voltage (V)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Wrost Case		277
(Goniophotometer - Section 4.2)		Non-Wrost Case		120
Input Current (A)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Wrost Case		0.047
(Goniophotometer - Section 4.2)		Non-Wrost Case		0.095
Power (Input Wattage - W)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Wrost Case		11.9
(Goniophotometer - Section 4.2)		Non-Wrost Case		11.3

2.0 Test List

Test Item	Test	Test Date	Model Number	Sample No.
1	Integrating Sphere Test	2023/5/23	CW2/11W/3500K	D1
2	Goniophotometer Test	2023/5/23	CW2/11W/3500K	D1
3	THD and PF Test	2023/5/23	CW2/11W/3500K	D1

Remark(If any)

1、 This report shall not be used by the client to claim product endorsement by NVLAP, NIST or any agency of the US government.


2、 The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.

3.0 Production Description

Luminaire Description: CW2/11W/3500K

Electrical Specification: 120V-277V,50/60HZ

Photos of Luminaire Characteristics

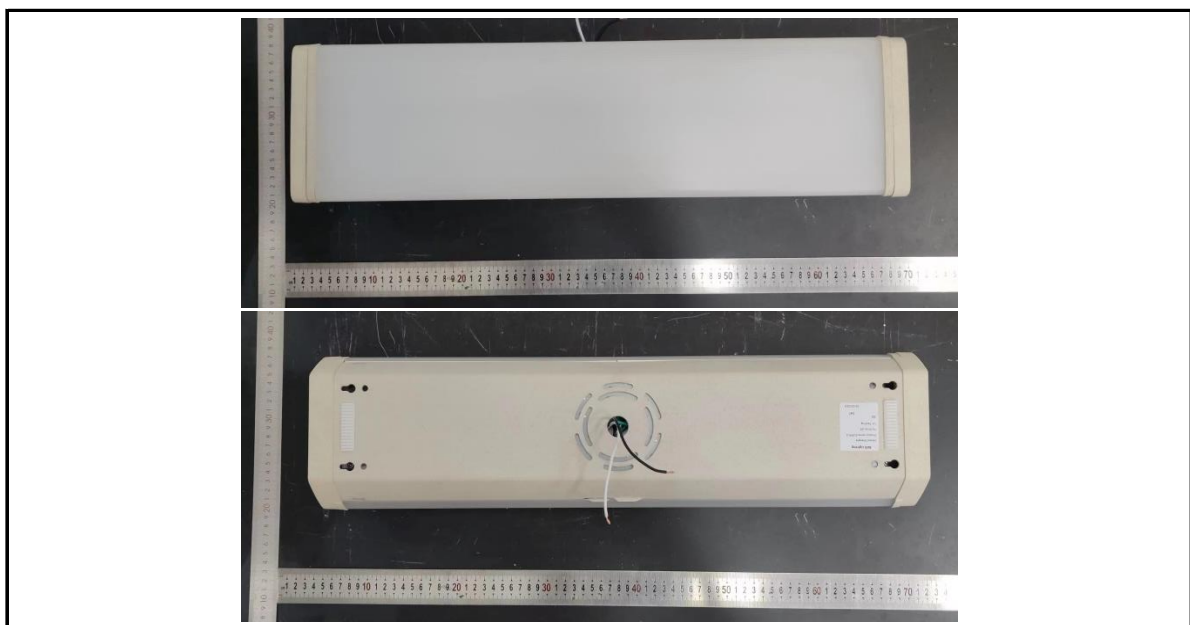

4.0 LM-79 Measurement and Test Results

4.1 Integrating Sphere Test

Model No.	CW2/11W/3500K	Sample ID.	D1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.3	Humidity (%RH)	56.0

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$.

The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.

The sample was measured using 4π geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.

Test Result

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
120.02	60	0.095	11.3	0.987
277.00	60	0.047	11.9	0.915


Test Result

CCT (K)	CRI	R9	Duv
3462	84	14	0.0024

Rf	Rg	IES Rcs,h1
85	98	-11%

4.1 Integrating Sphere Test

Results

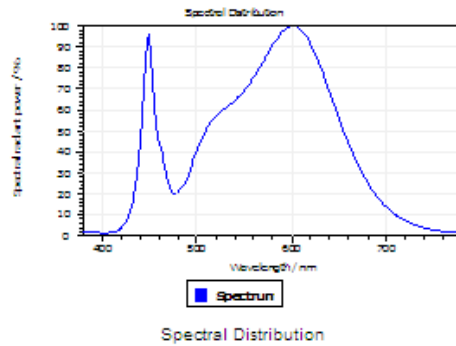


Spectral values

DominantWavelength 582.11 nm
Purity 0.371
PeakWavelength 600.95 nm
Radiant Power 4.288 W
Width50%:

Color Coordinates

Correlated Color Temperat 3462 K
x: 0.4049 u: 0.2378 u': 0.2378
y: 0.3851 v: 0.3392 v': 0.5088
CRI01 83.0 CRI09 13.6
CRI02 90.6 CRI10 78.2
CRI03 95.8 CRI11 83.7
CRI04 83.5 CRI12 69.9
CRI05 83.5 CRI13 84.8
CRI06 87.9 CRI14 98.0
CRI07 84.6 CRI15 76.5
CRI08 64.0 CRI16 74.7
ResultsCRI 84.1



PlanckDistance 2.4E-003

4.1 Integrating Sphere Test


IES TM-30-18 Color Rendition Report

Source: DLF2305110-4a

Manufacturer: RAB Lighting Inc.

Date: 2023/5/23

Model: CW2/11W/3500K

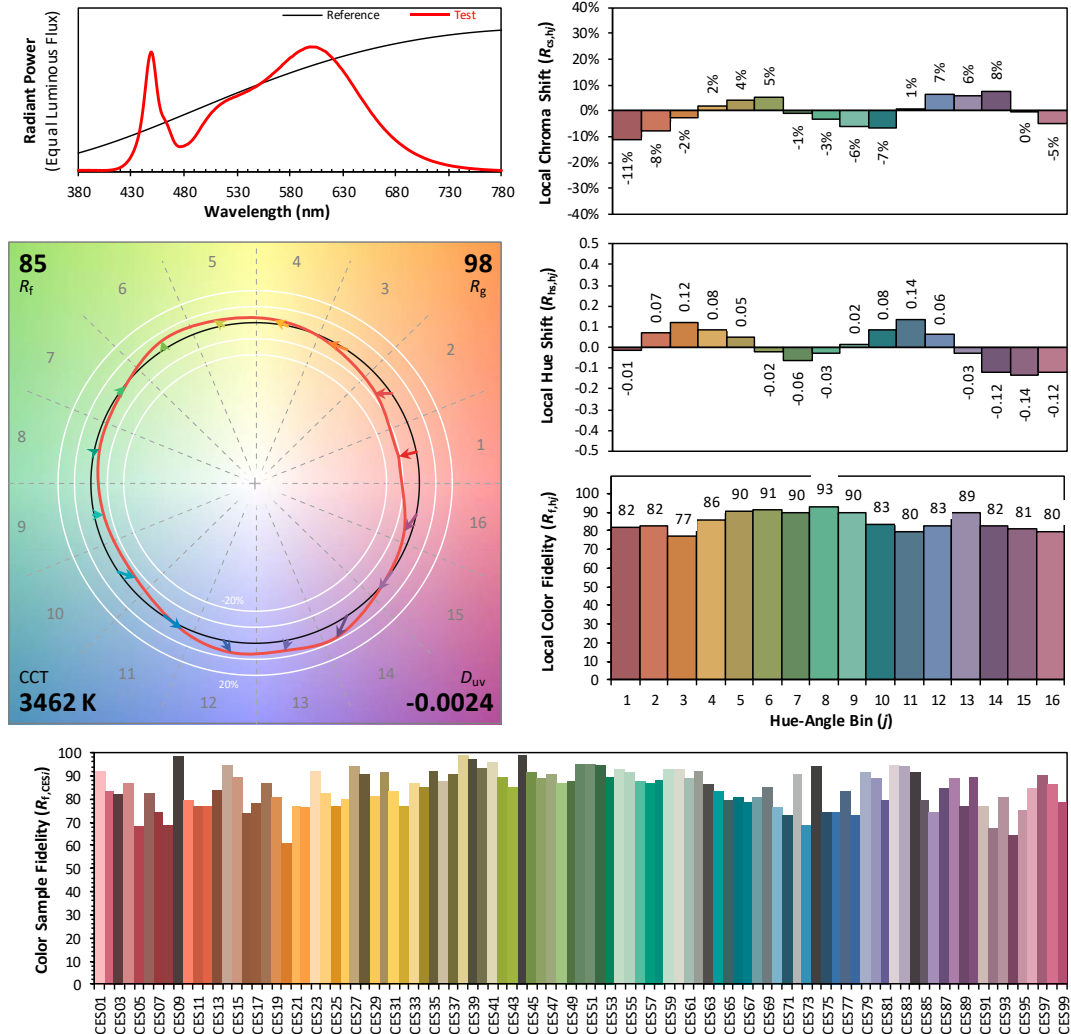

Notes: This is a recommended method for displaying IES TM-30-18 information.

x 0.4049
 y 0.3851
 u' 0.2378
 v' 0.5088

CIE 13.3-1995
(CRI)

R_a 85
 R_g 18

4.1 Integrating Sphere Test

Spectral Distribution over Visible Wavelength							
WL (nm)	Radiant (Watts/nm)	WL (nm)	Radiant (Watts/nm)	WL (nm)	Radiant (Watts/nm)	WL (nm)	Radiant (Watts/nm)
380	3.34E-04	485	6.10E-03	590	2.56E-02	695	4.25E-03
385	3.39E-04	490	7.31E-03	595	2.61E-02	700	3.64E-03
390	3.30E-04	495	9.02E-03	600	2.63E-02	705	3.12E-03
395	3.26E-04	500	1.07E-02	605	2.63E-02	710	2.64E-03
400	2.99E-04	505	1.22E-02	610	2.58E-02	715	2.24E-03
405	3.14E-04	510	1.34E-02	615	2.51E-02	720	1.92E-03
410	3.73E-04	515	1.43E-02	620	2.40E-02	725	1.63E-03
415	5.53E-04	520	1.50E-02	625	2.28E-02	730	1.39E-03
420	9.58E-04	525	1.55E-02	630	2.14E-02	735	1.18E-03
425	1.78E-03	530	1.60E-02	635	1.98E-02	740	1.01E-03
430	3.29E-03	535	1.65E-02	640	1.81E-02	745	8.62E-04
435	5.97E-03	540	1.70E-02	645	1.64E-02	750	7.40E-04
440	1.13E-02	545	1.76E-02	650	1.47E-02	755	6.33E-04
445	2.08E-02	550	1.83E-02	655	1.31E-02	760	5.48E-04
450	2.49E-02	555	1.90E-02	660	1.16E-02	765	4.69E-04
455	1.67E-02	560	1.99E-02	665	1.01E-02	770	4.04E-04
460	1.17E-02	565	2.09E-02	670	8.85E-03	775	3.48E-04
465	9.51E-03	570	2.19E-02	675	7.71E-03	780	3.00E-04
470	6.63E-03	575	2.30E-02	680	6.68E-03		
475	5.35E-03	580	2.40E-02	685	5.79E-03		
480	5.47E-03	585	2.48E-02	690	4.95E-03		

4.0 LM-79 Measurement and Test Results

4.2 Goniophotometer Test

Model No.	CW2/11W/3500K	Sample ID.	D1
Opreate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.3	Humidity (%RH)	54.0

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric paramters were measured using a type C goniophotometer and software.

The ambient temperature shall be maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$, measured at a point not more than 1 m from the sample and at the same height as the sample.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.

The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 0.5° vertical intervals and 10° horizontal intervals.

Test Conditions

Condition	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
WROST CASE	277.02	60	0.047	11.9	0.915
NON-WROST CASE	120.02	60	0.095	11.3	0.987


Test Result

Flux (lm)	Field Angle(10%)		Beam Angle(50%)		Luminous Efficacy (lm/W)
	C0-180	C90-270	C0-180	C90-270	
1550	168.8	158.9	109.9	108.7	130.2


Zonal Lumen Requirement (0° - 60°)	UGR (X=4H, Y=8H, 70/50/20%)	Length(ft)	Lumen/ft
73.96%	21.3	2.00	775

4.2 Goniophotometer Test

Light Distrubtion Curve

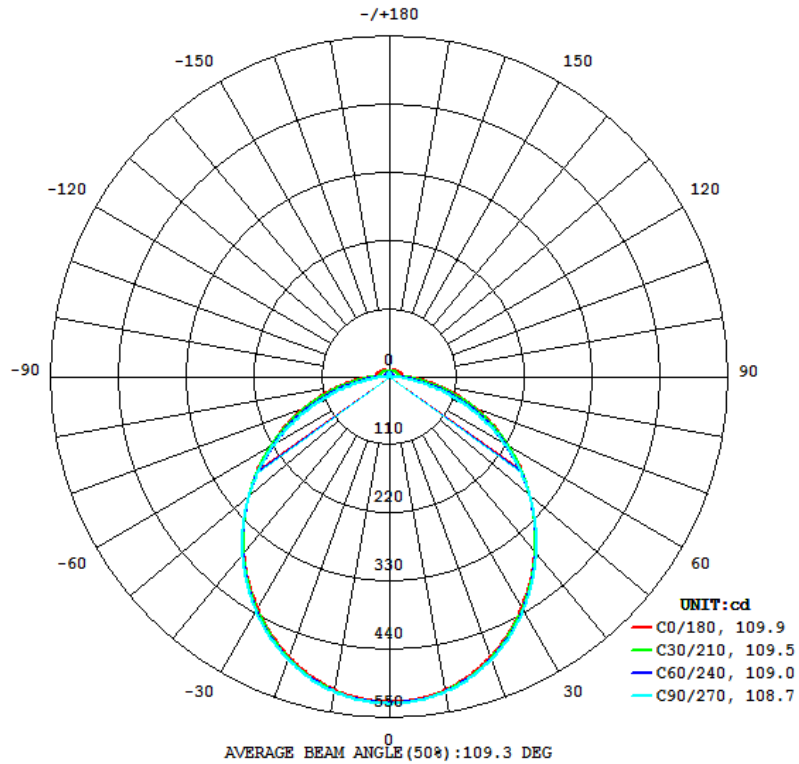

Isolux Plot

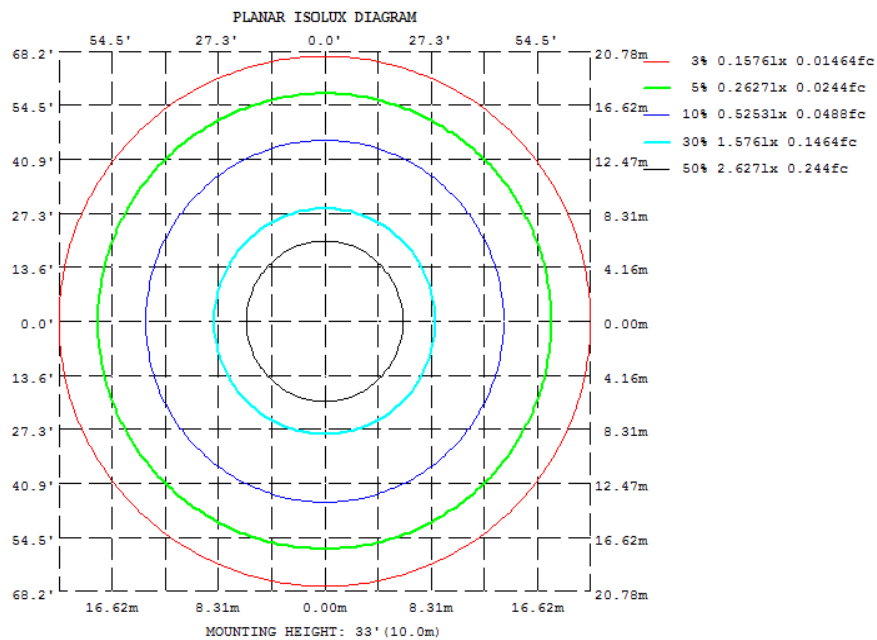

4.2 Goniophotometer Test

Zonal Lumen Summary

γ	C0	C45	C90	C135	C180	C225	C270	C315
10	513.2	515.9	516.0	515.9	513.2	515.9	516.0	515.9
20	480.2	483.0	484.2	483.0	480.2	483.0	484.2	483.0
30	429.6	432.9	435.2	432.9	429.6	432.9	435.2	432.9
40	368.0	369.7	371.8	369.7	368.0	369.7	371.8	369.7
50	299.0	298.5	298.3	298.5	299.0	298.5	298.3	298.5
60	224.9	221.5	216.8	221.5	224.9	221.5	216.8	221.5
70	149.9	141.8	130.7	141.8	149.9	141.8	130.7	141.8
80	79.22	67.39	48.61	67.39	79.22	67.39	48.61	67.39
90	28.82	17.30	0.0552	17.30	28.82	17.30	0.0552	17.30
100	23.41	14.09	0.6072	14.09	23.41	14.09	0.6072	14.09
110	21.56	13.47	2.030	13.47	21.56	13.47	2.030	13.47
120	19.84	12.92	3.732	12.92	19.84	12.92	3.732	12.92
130	17.73	12.20	5.435	12.20	17.73	12.20	5.435	12.20
140	15.41	11.56	6.954	11.56	15.41	11.56	6.954	11.56
150	13.34	10.72	8.209	10.72	13.34	10.72	8.209	10.72
160	11.33	9.888	8.826	9.888	11.33	9.888	8.826	9.888
170	9.765	8.131	6.838	8.131	9.765	8.131	6.838	8.131
180	2.140	5.113	5.793	5.113	2.140	5.113	5.793	5.113
DEG	LUMINOUS INTENSITY:cd							

UGR Table - Corrected

UGR Table - Corrected										
Reflectances										
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20
Room Size										
UGR Viewed Crosswise										
X=2H Y=2H	16.1	17.7	16.6	18.1	18.5	16.6	18.1	17.1	18.6	19.0
3H	17.7	19.1	18.2	19.5	20.0	18.5	19.9	19.0	20.4	20.8
4H	18.2	19.5	18.7	20.0	20.5	19.3	20.6	19.8	21.1	21.6
6H	18.5	19.7	19.0	20.2	20.7	20.0	21.2	20.5	21.7	22.2
8H	18.6	19.7	19.1	20.2	20.8	20.3	21.4	20.8	21.9	22.4
12H	18.6	19.7	19.1	20.2	20.7	20.5	21.6	21.0	22.1	22.6
UGR Viewed Endwise										
4H 2H	16.8	18.1	17.3	18.5	19.0	17.2	18.5	17.6	18.9	19.4
3H	18.6	19.7	19.1	20.2	20.7	19.3	20.4	19.8	20.9	21.4
4H	19.2	20.2	19.7	20.7	21.3	20.2	21.2	20.7	21.7	22.3
6H	19.6	20.5	20.1	21.0	21.6	21.0	21.9	21.5	22.4	23.0
8H	19.7	20.5	20.2	21.0	21.6	21.3	22.2	21.9	22.7	23.3
12H	19.7	20.5	20.3	21.0	21.6	21.7	22.4	22.2	22.9	23.5
UGR Viewed Endwise										
8H 4H	19.5	20.4	20.1	20.9	21.5	20.4	21.3	21.0	21.8	22.4
6H	20.0	20.7	20.6	21.3	21.9	21.4	22.0	21.9	22.6	23.2
8H	20.2	20.8	20.8	21.4	22.0	21.8	22.4	22.4	23.0	23.6
12H	20.3	20.8	20.8	21.4	22.1	22.2	22.8	22.8	23.3	24.0
UGR Viewed Endwise										
12H 4H	19.6	20.3	20.2	20.9	21.5	20.4	21.2	21.0	21.7	22.3
6H	20.2	20.8	20.7	21.3	22.0	21.4	22.0	22.0	22.6	23.2
8H	20.3	20.9	20.9	21.4	22.1	21.9	22.4	22.4	23.0	23.7
Maximum UGR = 24.0										

4.2 Goniophotometer Test

ZONAL LUMEN SUMMARY

	Zonal (lm)		Total (lm)	Percent
0-10	49.73	0 - 10	49.73	3.21%
10-20	141.48	0 - 20	191.21	12.34%
20-30	211.87	0 - 30	403.08	26.01%
30-40	251.98	0 - 40	655.06	42.26%
40-50	258.52	0 - 50	913.58	58.94%
50-60	232.68	0 - 60	1146.26	73.96%
60-70	179.29	0 - 70	1325.55	85.52%
70-80	108.07	0 - 80	1433.62	92.50%
80-90	40.10	0 - 90	1473.72	95.08%
90-100	15.24	0 - 100	1488.96	96.07%
100-110	13.69	0 - 110	1502.65	96.95%
110-120	12.48	0 - 120	1515.13	97.75%
120-130	10.89	0 - 130	1526.02	98.46%
130-140	8.97	0 - 140	1534.99	99.04%
140-150	6.87	0 - 150	1541.86	99.48%
150-160	4.77	0 - 160	1546.63	99.79%
160-170	2.63	0 - 170	1549.26	99.96%
170-180	0.67	0 - 180	1549.93	100.00%

4.2 Goniophotometer Test


COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
R/W	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	118	118	118	118	115	115	115	115	108	108	108	103	103	103	98	98	98	95
1	107	102	98	94	104	100	96	92	94	91	88	90	87	85	85	83	81	79
2	97	89	82	76	94	87	80	75	82	77	73	78	74	70	75	71	68	65
3	89	78	70	63	86	76	69	62	73	66	61	69	64	59	66	61	57	55
4	81	69	60	54	79	68	59	53	64	57	52	61	55	51	59	54	49	47
5	75	62	53	46	72	60	52	46	58	50	45	55	49	44	53	47	43	41
6	69	56	47	40	67	54	46	40	52	45	39	50	43	38	48	42	38	36
7	64	50	42	36	62	49	41	35	47	40	35	46	39	34	44	38	33	31
8	60	46	38	32	58	45	37	31	43	36	31	42	35	30	40	34	30	28
9	56	42	34	28	54	41	34	28	40	33	28	38	32	27	37	31	27	25
10	52	39	31	26	51	38	31	26	37	30	25	36	29	25	34	29	25	23

CONE OF LIGHT DIAGRAM

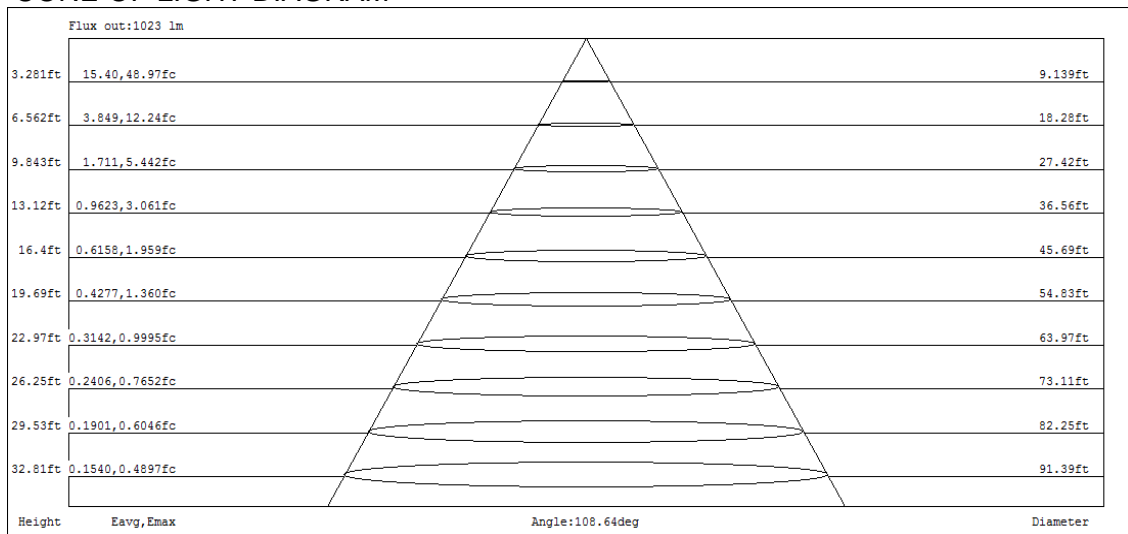

4.0 LM-79 Measurement and Test Results

4.3 THD and PF Test

Model No.	CW2/11W/3500K	Sample ID.	D1
Temperature (°C)	25.3	Humidity (%RH)	56.0

Test Method

The samples were tested according to the ANSI C82.77:2002.

The total harmonic distortion shall be measured to the 40th order.

The ambient temperature condition was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$. The sample measurements were made using a digital power meter and power supply. The sample was operated at rated voltage and was stabilized before measurement. The total harmonic distortion were calculated.

Test Results

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	THD
120.02	60	0.095	11.3	0.987	13.27%
277.00	60	0.047	11.9	0.915	14.71%

5.0 Equipment Information

Test Equipment			
Equipment ID	Equipment Name	Last Calibration Date	Calibration Due Date
DLF107	Integrating Sphere System	2022/12/24	2023/12/23
DLF108	Auxiliary Lamp	2022/12/24	2023/12/23
DLF122	Measurement Standard Lamp Standard Lamp Type: 220 V, 0.4720 A, Tungsten, Omni-directional	2022/12/24	2023/12/23
DLF116	AC Power Source	2022/12/16	2023/12/15
DLF516	Power Meter	2022/12/16	2023/12/15
DLF112	Temperature Recorder	2022/12/28	2023/12/27
DLF114	Temperature & Humidity Datalogger	2022/12/28	2023/12/27
DLF101	Goniophotometer	2022/12/24	2023/12/23
DLF511	AC Power Source	2022/12/16	2023/12/15
DLF512	AC Power Source	2022/12/16	2023/12/15
DLF513	AC Power Source	2022/12/16	2023/12/15
DLF507	DC Power Source	2022/12/16	2023/12/15
DLF111	Temperature & Humidity Datalogger	2022/12/28	2023/12/27
DLF119	Power Meter	2022/12/16	2023/12/15
DLF031	Temperature data logger	2022/6/22	2023/6/21
DLF073	Power Analyzer	2022/6/22	2023/6/21
DLF003	Temperature & Humidity Datalogger	2022/6/22	2023/6/21

***** End of Test Report*****