

Photometric Test Report

Relevant Standards

- ☒ IES LM-79-2008
- ☒ ANSI C82.77:2017

Prepared For RAB Lighting Inc.

Room 6A33, No.1388, Wuzhong road, Shanghai, China

Xiao Xiang, 15921313292, Gary.Xiao@rabweb.com

Prepared By

Deliver Co., Ltd.

Block 11, 78 Keling Road, SSTP, Suzhou, China

0512-66801950, kevin.jia@szdeliver.com

Project Number

DLF2212110

Report Number

DLF2212110-4a


Test Date

2023/1/3

Issue Date


2023/1/5

Prepared By



Wangzun Zhu

Approved By



Kevin Jia

The results contained in this report pertain only to the tested sample.

This report shall not be reproduced, except in full, without written approval of Deliver Co., Ltd.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP.

1.0 Test Summary

DLC Technical Requirements v5.1

Indoor - Linear Ambient - Direct Linear Ambient Luminaires				
Requirement Category	Test Method	Requirements		Test value
Luminaire Output (lm) (Goniophotometer - Section 4.2)	IES LM-79-2008	750		1931
Lumen/ft (Goniophotometer - Section 4.2)	IES LM-79-2008	≥375		966
Minimum Luminaire Efficacy (lm/W) (Goniophotometer - Section 4.2)	IES LM-79-2008	Standard 115	Premium 130	127.0
Power (Input Wattage) (W) (Goniophotometer - Section 4.2)	IES LM-79-2008	Wrost Case		15.2
Total Harmonic Distortion (A%) (THD & PF - section 4.3)	ANSI C82.77:2014	20.00%	120V	5.02%
		20.00%	277V	9.58%
Power Factor (THD & PF - section 4.3)	ANSI C82.77:2014	0.9	120V	0.996
		0.9	277V	0.946
Allowable CCTs* (K) (Integrating Sphere - Section 4.1)	IES LM-79-2008	7 step	3465±245	3437
		4 step	3465±124	
Minimum CRI (Integrating Sphere - Section 4.1)	IES LM-79-2008 CIE 13.3-1995	≥80		84
Minimum R9 (Integrating Sphere - Section 4.1)	IES LM-79-2008 CIE 13.3-1995	≥0		10
Minimum Rf (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥70		85
Minimum Rg (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥89		95
Minimum IES Rcs,h1 (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	-12%≤IES Rcs,h1≤+23%		-12%
Zonal Lumen Requirement (0°-60°) (Goniophotometer - Section 4.2)	IES LM-79-2008	≥40%		72.22%
Corrected UGR (X=4H, Y=8H, 70/50/20%) (Goniophotometer - Section 4.2)	CIE 190-2010	<22		22.0
Input Voltage (V)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Wrost Case		277
(Goniophotometer - Section 4.2)		Non-Wrost Case		120
Input Current (A)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Wrost Case		0.058
(Goniophotometer - Section 4.2)		Non-Wrost Case		0.124
Power (Input Wattage - W)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Wrost Case		15.2
(Goniophotometer - Section 4.2)		Non-Wrost Case		14.8

2.0 Test List

Test Item	Test	Test Date	Model Number	Sample No.
1	Integrating Sphere Test	2023/1/3	GUSJR2/15W/3500K	D1
2	Goniophotometer Test	2023/1/3	GUSJR2/15W/3500K	D1
3	THD and PF Test	2023/1/3	GUSJR2/15W/3500K	D1

Remark(If any)

1、 This report shall not be used by the client to claim product endorsement by NVLAP, NIST or any agency of the US government.


2、 The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.

3.0 Production Description

Luminaire Description: GUSJR2/15W/3500K

Electrical Specification: 120V-277V,50/60HZ

Photos of Luminaire Characteristics

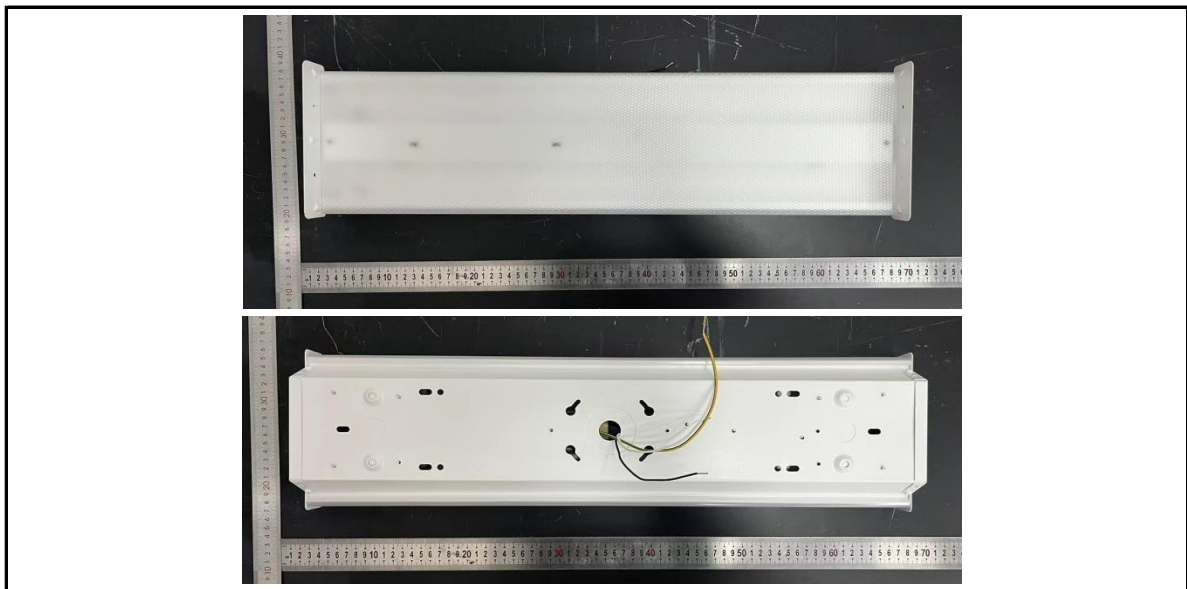

4.0 LM-79 Measurement and Test Results

4.1 Integrating Sphere Test

Model No.	GUSJR2/15W/3500K	Sample ID.	D1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.3	Humidity (%RH)	56.0

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$.

The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.

The sample was measured using 4π geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.

Test Result

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
119.98	60	0.123	14.7	0.996
277.06	60	0.058	15.1	0.946


Test Result

CCT (K)	CRI	R9	Duv
3437	84	10	0.0014

Rf	Rg	IES Rcs,h1
85	95	-12%

4.1 Integrating Sphere Test

Results

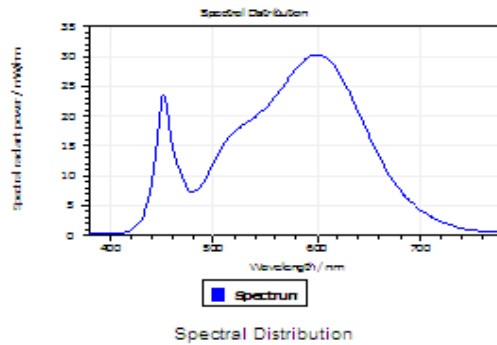


Spectral values

DominantWavelength 580.56 nm
Purity 0.422
PeakWavelength 599.69 nm
Radiant Power 4.885 W
Width50%:

Color Coordinates

Correlated Color Temperatur 3437 K
x: 0.4104 u: 0.2367 u': 0.2367
y: 0.3964 v: 0.3429 v': 0.5144
CRI01 81.8 CRI09 10.0
CRI02 90.3 CRI10 77.3
CRI03 96.7 CRI11 81.8
CRI04 82.4 CRI12 65.5
CRI05 82.0 CRI13 83.8
CRI06 87.5 CRI14 98.5
CRI07 85.3 CRI15 74.7
CRI08 63.0 CRI16 72.3
ResultsCRI 83.6

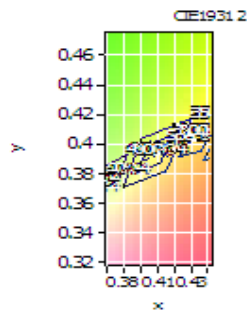

PlanckDistance 1.4E-003

4.1 Integrating Sphere Test


IES TM-30-18 Color Rendition Report

Source: DLF2212110-4a

Manufacturer: RAB Lighting Inc.

Date: 2023/1/3

Model: GUSJR2/15W/3500K

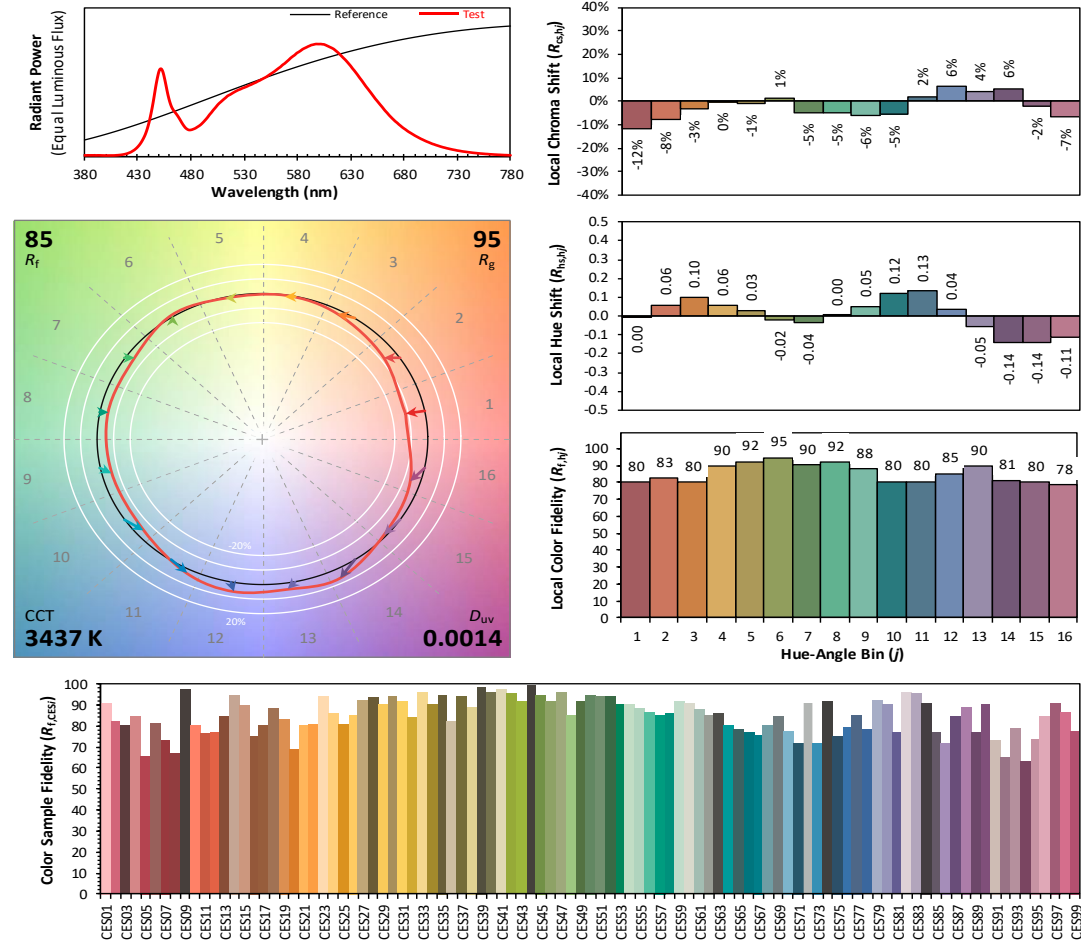

Notes: This is a recommended method for displaying IES TM-30-18 information.

x 0.4104
 y 0.3964
 u' 0.2367
 v' 0.5144

CIE 13.3-1995
(CRI)

R_a 84
 R_9 13

4.0 LM-79 Measurement and Test Results

4.2 Goniophotometer Test

Model No.	GUSJR2/15W/3500K	Sample ID.	D1
Opreate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.3	Humidity (%RH)	54.0

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric paramters were measured using a type C goniophotometer and software.

The ambient temperature shall be maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$, measured at a point not more than 1 m from the sample and at the same height as the sample.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.

The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 0.5° vertical intervals and 10° horizontal intervals.

Test Conditions

Condition	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
WROST CASE	277.05	60	0.058	15.2	0.941
NON-WROST CASE	120.00	60	0.124	14.8	0.991


Test Result

Flux (lm)	Field Angle(10%)		Beam Angle(50%)		Luminous Efficacy (lm/W)
	C0-180	C90-270	C0-180	C90-270	
1931	175.5	158.2	104.1	102.2	127.0


Zonal Lumen Requirement (0° - 60°)	UGR (X=4H, Y=8H, 70/50/20%)	Length(ft)	Lumen/ft
72.22%	22.0	2.00	966

4.2 Goniophotometer Test

Light Distribution Curve

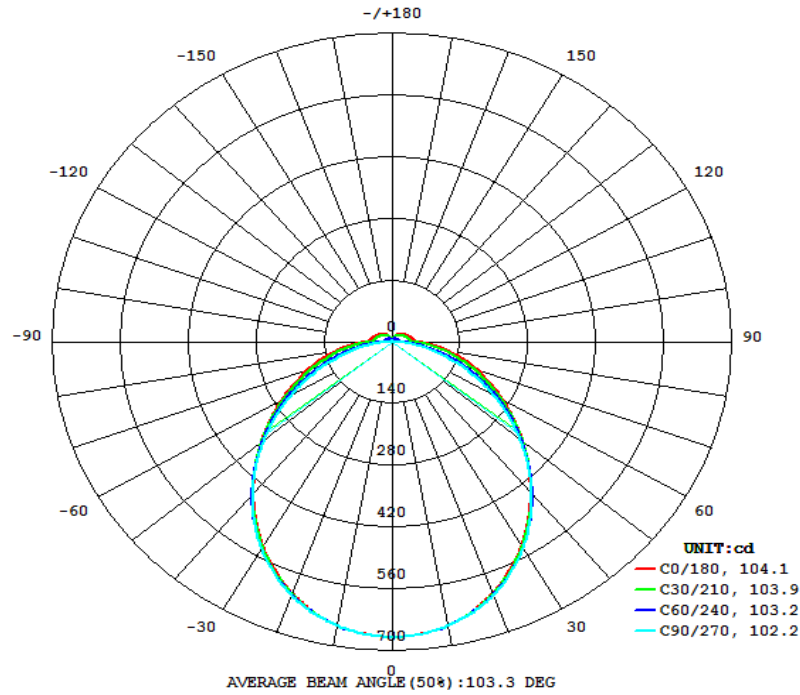

Isolux Plot

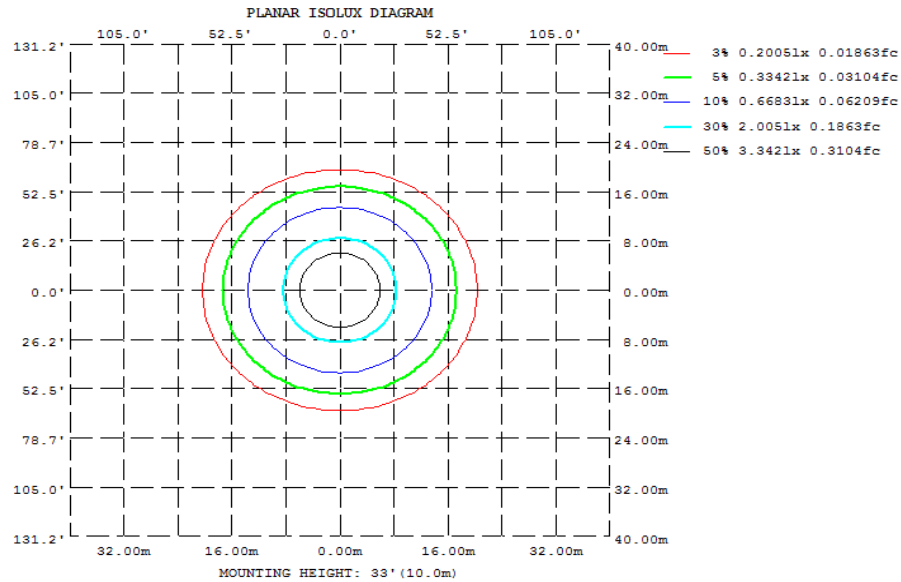

4.2 Goniophotometer Test

Zonal Lumen Summary

γ	C0	C45	C90	C135	C180	C225	C270	C315
10	653.0	653.0	653.2	653.0	653.0	653.0	653.2	653.0
20	606.4	608.3	609.8	608.3	606.4	608.3	609.8	608.3
30	533.4	538.0	540.0	538.0	533.4	538.0	540.0	538.0
40	445.4	449.1	448.6	449.1	445.4	449.1	448.6	449.1
50	353.0	351.8	345.9	351.8	353.0	351.8	345.9	351.8
60	264.6	255.9	241.7	255.9	264.6	255.9	241.7	255.9
70	186.6	168.7	143.8	168.7	186.6	168.7	143.8	168.7
80	117.4	93.05	60.14	93.05	117.4	93.05	60.14	93.05
90	55.96	34.73	0.2612	34.73	55.96	34.73	0.2612	34.73
100	47.07	29.63	1.356	29.63	47.07	29.63	1.356	29.63
110	41.19	26.54	1.960	26.54	41.19	26.54	1.960	26.54
120	35.71	23.33	3.041	23.33	35.71	23.33	3.041	23.33
130	30.18	20.40	4.053	20.40	30.18	20.40	4.053	20.40
140	25.09	17.49	4.936	17.49	25.09	17.49	4.936	17.49
150	19.72	13.67	5.533	13.67	19.72	13.67	5.533	13.67
160	13.72	10.17	5.750	10.17	13.72	10.17	5.750	10.17
170	7.780	6.216	4.533	6.216	7.780	6.216	4.533	6.216
180	1.774	3.699	4.243	3.699	1.774	3.699	4.243	3.699
DEG	LUMINOUS INTENSITY:cd							

UGR Table - Corrected

UGR Table - Corrected										
Reflectances										
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20
Room Size										
X=2H Y=2H										
3H	15.9	17.4	16.4	17.8	18.3	16.6	18.1	17.1	18.6	19.1
4H	17.4	18.7	17.9	19.2	19.7	18.7	20.0	19.2	20.5	21.0
6H	17.9	19.2	18.4	19.6	20.2	19.6	20.9	20.1	21.4	21.9
8H	18.2	19.4	18.7	19.9	20.5	20.5	21.7	21.0	22.2	22.7
12H	18.3	19.4	18.8	20.0	20.5	20.9	22.0	21.4	22.5	23.1
4H	18.3	19.4	18.9	19.9	20.5	21.3	22.4	21.8	22.9	23.5
UGR Viewed Crosswise										
2H	16.6	17.8	17.1	18.3	18.9	17.1	18.4	17.6	18.9	19.4
3H	18.3	19.4	18.8	19.9	20.4	19.4	20.5	19.9	21.0	21.6
4H	18.9	19.9	19.4	20.4	21.0	20.5	21.5	21.0	22.0	22.6
6H	19.3	20.2	19.9	20.8	21.4	21.6	22.4	22.1	23.0	23.6
8H	19.5	20.3	20.0	20.8	21.4	22.0	22.8	22.6	23.4	24.0
12H	19.5	20.2	20.1	20.8	21.5	22.5	23.3	23.1	23.9	24.5
UGR Viewed Endwise										
4H	19.3	20.1	19.9	20.7	21.3	20.7	21.5	21.3	22.1	22.7
6H	19.9	20.6	20.5	21.2	21.8	22.0	22.6	22.6	23.2	23.9
8H	20.1	20.7	20.7	21.3	22.0	22.6	23.2	23.2	23.8	24.4
12H	20.2	20.7	20.8	21.3	22.1	23.2	23.7	23.8	24.3	25.1
Maximum UGR = 25.1										

4.2 Goniophotometer Test

ZONAL LUMEN SUMMARY

	Zonal (lm)		Total (lm)	Percent
0-10	63.08	0 - 10	63.08	3.27%
10-20	178.76	0 - 20	241.84	12.52%
20-30	264.98	0 - 30	506.82	26.25%
30-40	309.06	0 - 40	815.88	42.25%
40-50	308.48	0 - 50	1124.36	58.23%
50-60	270.28	0 - 60	1394.64	72.22%
60-70	207.53	0 - 70	1602.17	82.97%
70-80	134.81	0 - 80	1736.98	89.95%
80-90	63.67	0 - 90	1800.65	93.25%
90-100	31.39	0 - 100	1832.04	94.87%
100-110	27.09	0 - 110	1859.13	96.28%
110-120	22.69	0 - 120	1881.82	97.45%
120-130	18.12	0 - 130	1899.94	98.39%
130-140	13.58	0 - 140	1913.52	99.09%
140-150	9.30	0 - 150	1922.82	99.57%
150-160	5.40	0 - 160	1928.22	99.85%
160-170	2.35	0 - 170	1930.57	99.97%
170-180	0.49	0 - 180	1931.06	100.00%

4.2 Goniophotometer Test


COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
R/W	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	117	117	117	117	114	114	114	114	107	107	107	101	101	101	96	96	96	93
1	107	102	97	93	103	99	95	91	93	90	87	88	86	83	84	81	79	77
2	97	89	82	76	94	86	80	74	81	76	72	77	73	69	73	70	66	64
3	88	78	70	63	85	76	68	62	72	65	60	68	63	58	65	60	56	54
4	81	69	60	54	78	67	59	53	64	57	51	61	55	50	58	53	49	46
5	75	62	53	46	72	60	52	46	57	50	45	55	48	43	52	47	42	40
6	69	56	47	40	67	54	46	40	52	45	39	50	43	38	47	42	37	35
7	64	51	42	36	62	49	41	35	47	40	35	45	39	34	43	38	33	31
8	60	46	38	32	58	45	37	32	43	36	31	42	35	30	40	34	30	28
9	56	42	34	29	54	42	34	28	40	33	28	38	32	27	37	31	27	25
10	52	39	31	26	51	38	31	26	37	30	25	36	29	25	34	29	25	23

CONE OF LIGHT DIAGRAM

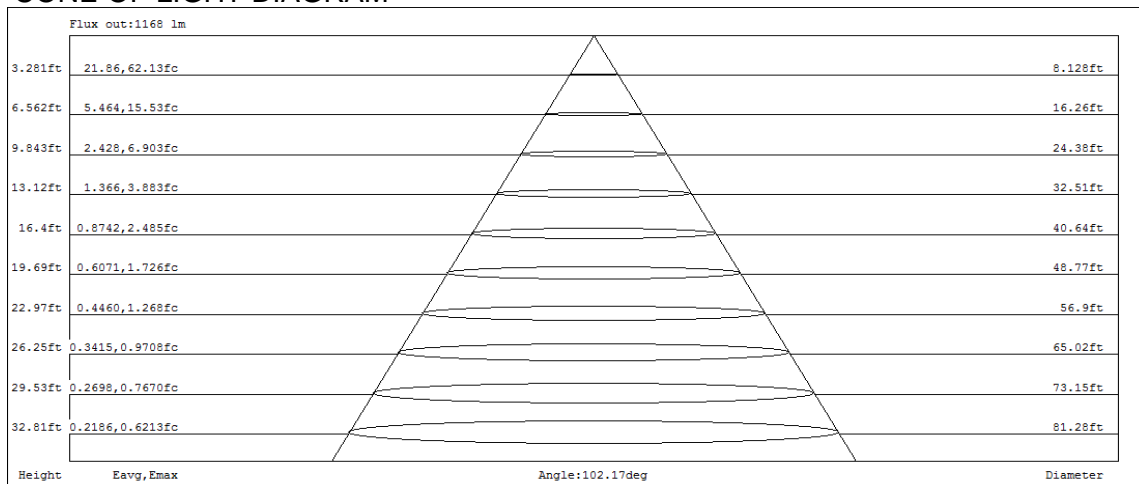

4.0 LM-79 Measurement and Test Results

4.3 THD and PF Test

Model No.	GUSJR2/15W/3500 K	Sample ID.	D1
Temperature (°C)	25.3	Humidity (%RH)	56.0

Test Method

The samples were tested according to the ANSI C82.77:2002.
 The total harmonic distortion shall be measured to the 40th order.
 The ambient temperature condition was maintained at 25° C ± 1° C. The sample measurements were made using a digital power meter and power supply. The sample was operated at rated voltage and was stabilized before measurement. The total harmonic distortion were calculated.

Test Results

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	THD
119.98	60	0.123	14.7	0.996	5.02%
277.06	60	0.058	15.1	0.946	9.58%

5.0 Equipment Information

Test Equipment			
Equipment ID	Equipment Name	Last Calibration Date	Calibration Due Date
DLF107	Integrating Sphere System	2022/12/26	2023/12/25
DLF108	Auxiliary Lamp	2022/12/26	2023/12/25
DLF122	Measurement Standard Lamp Standard Lamp Type: 220 V, 0.4720 A, Tungsten, Omni-derectional	2022/12/26	2023/12/25
DLF116	AC Power Source	2022/12/26	2023/12/25
DLF113	Power Meter	2022/12/26	2023/12/25
DLF112	Temperature Recorder	2022/12/26	2023/12/25
DLF114	Temperature & Humidity Datalogger	2022/12/26	2023/12/25
DLF101	Goniophotometer	2022/12/26	2023/12/25
DLF125	Standard Lamp Standard Lamp Type: 76.58 V, 6.7875 A, Tungsten, Omni-derectional	2022/12/26	2023/12/25
DLF104	AC Power Source	2022/12/26	2023/12/25
DLF507	DC Power Source	2022/12/26	2023/12/25
DLF102	Power Meter	2022/12/26	2023/12/25
DLF111	Temperature & Humidity Datalogger	2022/12/26	2023/12/25
DLF119	Power Meter	2022/12/26	2023/12/25
DLF031	Temperature data logger	2022/12/26	2023/12/25
DLF022	Digital power meter	2022/12/26	2023/12/25
DLF003	Temperature & Humidity Datalogger	2022/12/26	2023/12/25

***** End of Test Report*****