

Photometric Test Report

Relevant Standards

- ☒ IES LM-79-2008
- ☒ ANSI C82.77:2014

Prepared For

RAB Lighting Inc.

Room 6A33, No.1388, Wuzhong road, Shanghai, China

Xiao Xiang, 15921313292, Gary.Xiao@rabweb.com

Prepared By

Deliver Co., Ltd.

Block 11, 78 Keling Road, SSTP, Suzhou, China

0512-66801950, kevin.jia@szdeliver.com

Project Number

DLF2404111

Report Number

DLF2404111-11a

Test Date

2024/4/21

Issue Date


2024/4/23

Prepared By



Wangzun Zhu

Approved By



Kevin Jia

The results contained in this report pertain only to the tested sample.

This report shall not be reproduced, except in full, without written approval of Deliver Co., Ltd.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP.

1.0 Test Summary

DLC Technical Requirements v5.1

Indoor - High Bay Luminaires (Commercial and Industrial)				
Requirement Category	Test Method	Requirements		Test value
Luminaire Output (lm) (Goniophotometer - Section 4.2)	IES LM-79-2008	10000		24142
Minimum Luminaire Efficacy (lm/W) (Goniophotometer - Section 4.2)	IES LM-79-2008	Standard 120	Premium 135	169.9
Power (Input Wattage) (W) (Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		142.1
Total Harmonic Distortion (A%) (THD & PF - section 4.3)	ANSI C82.77:2014	20.00%	120V	2.55%
		20.00%	277V	12.49%
Power Factor (THD & PF - section 4.3)	ANSI C82.77:2014	0.9	120V	0.997
		0.9	277V	0.923
Allowable CCTs* (K) (Integrating Sphere - Section 4.1)	IES LM-79-2008	7 step	3985±275	3911
		4 step	3985±154	
Minimum CRI (Integrating Sphere - Section 4.1)	IES LM-79-2008 CIE 13.3-1995	≥70		84
Minimum R9 (Integrating Sphere - Section 4.1)	IES LM-79-2008 CIE 13.3-1995	≥-40		10
Minimum Rf (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥70		83
Minimum Rg (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥89		94
Minimum IES Rcs,h1 (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	-18%≤IES Rcs,h1≤+23%		-12%
Zonal Lumen Requirement (20°-50°) (Goniophotometer - Section 4.2)	IES LM-79-2008	≥30%		64.65%
Corrected UGR (X=4H, Y=8H, 70/50/20%) (Goniophotometer - Section 4.2)	CIE 190-2010	<28		25.7
Input Voltage (V)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		120
(Goniophotometer - Section 4.2)		Non-Worst Case		277
Input Current (A)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		1.188
(Goniophotometer - Section 4.2)		Non-Worst Case		0.549
Power (Input Wattage - W)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		142.1
(Goniophotometer - Section 4.2)		Non-Worst Case		140.3

2.0 Test List

Test Item	Test	Test Date	Model Number	Sample No.
1	Integrating Sphere Test	2024/4/21	H15XLB @ 150W/4000K	K1
2	Goniophotometer Test	2024/4/21	H15XLB @ 150W/4000K	K1
3	THD and PF Test	2024/4/21	H15XLB @ 150W/4000K	K1

Remark(If any)


- 1、 This report shall not be used by the client to claim product endorsement by NVLAP, NIST or any agency of the US government.
- 2、 The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.

3.0 Production Description

Luminaire Description: H15XLB @ 150W/4000K

Electrical Specification: 120V-277V,50/60HZ

Photos of Luminaire Characteristics

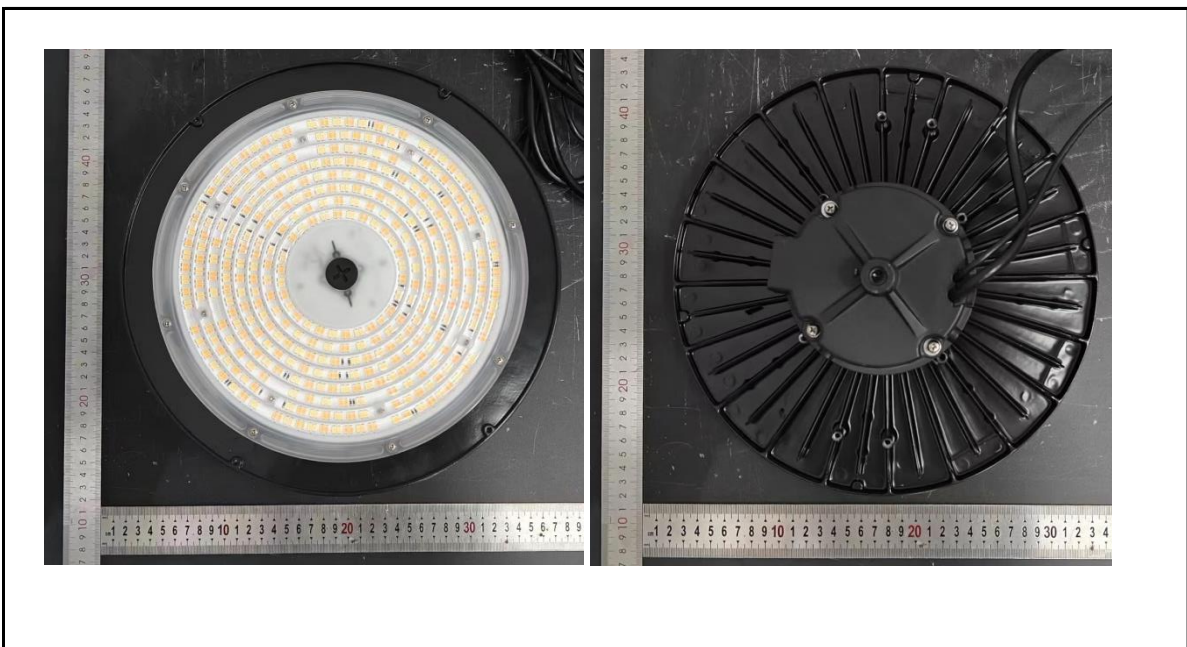

4.0 LM-79 Measurement and Test Results

4.1 Integrating Sphere Test

Model No.	H15XLB @ 150W/4000K	Sample ID.	K1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.3	Humidity (%RH)	56.0

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$.

The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.

The sample was measured using 4π geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.

Test Result



Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
119.99	60	1.189	142.2	0.997
276.99	60	0.549	140.4	0.923

Test Result

CCT (K)	CRI	R9	Duv
3911	84	10	-0.0017

Rf	Rg	IES Rcs,h1
83	94	-12%

4.1 Integrating Sphere Test

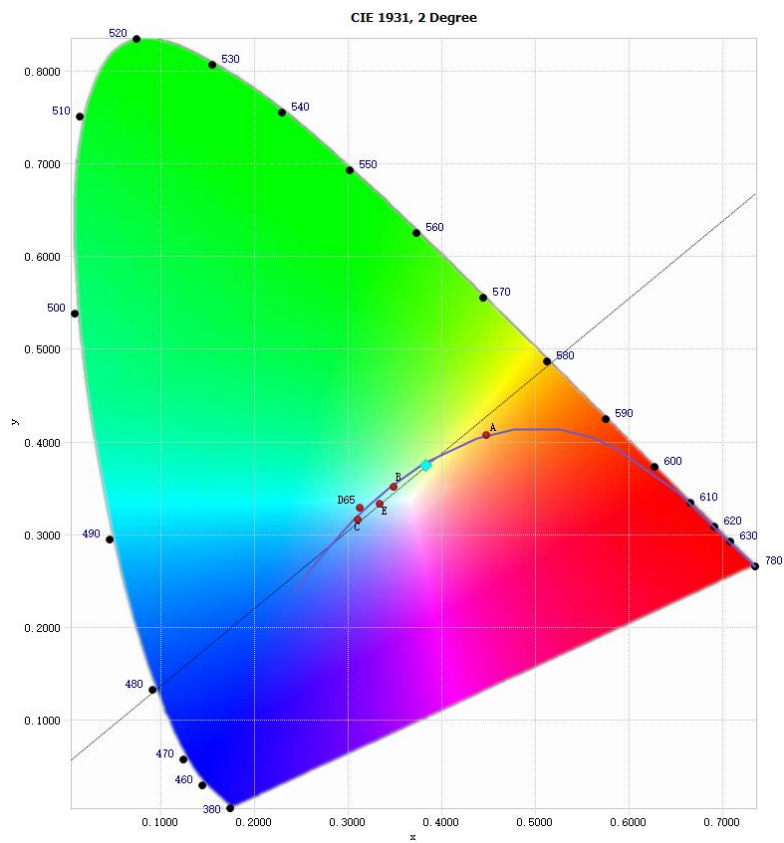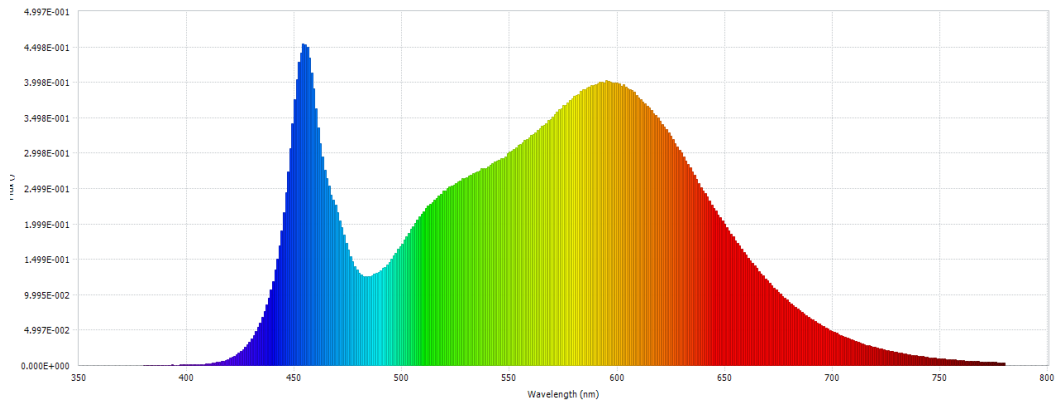

4.1 Integrating Sphere Test


IES TM-30-18 Color Rendition Report

Source: DLF2404111-11a

Manufacturer: RAB Lighting Inc.

Date: 2024/4/21

Model: H15XLB @ 150W/4000K

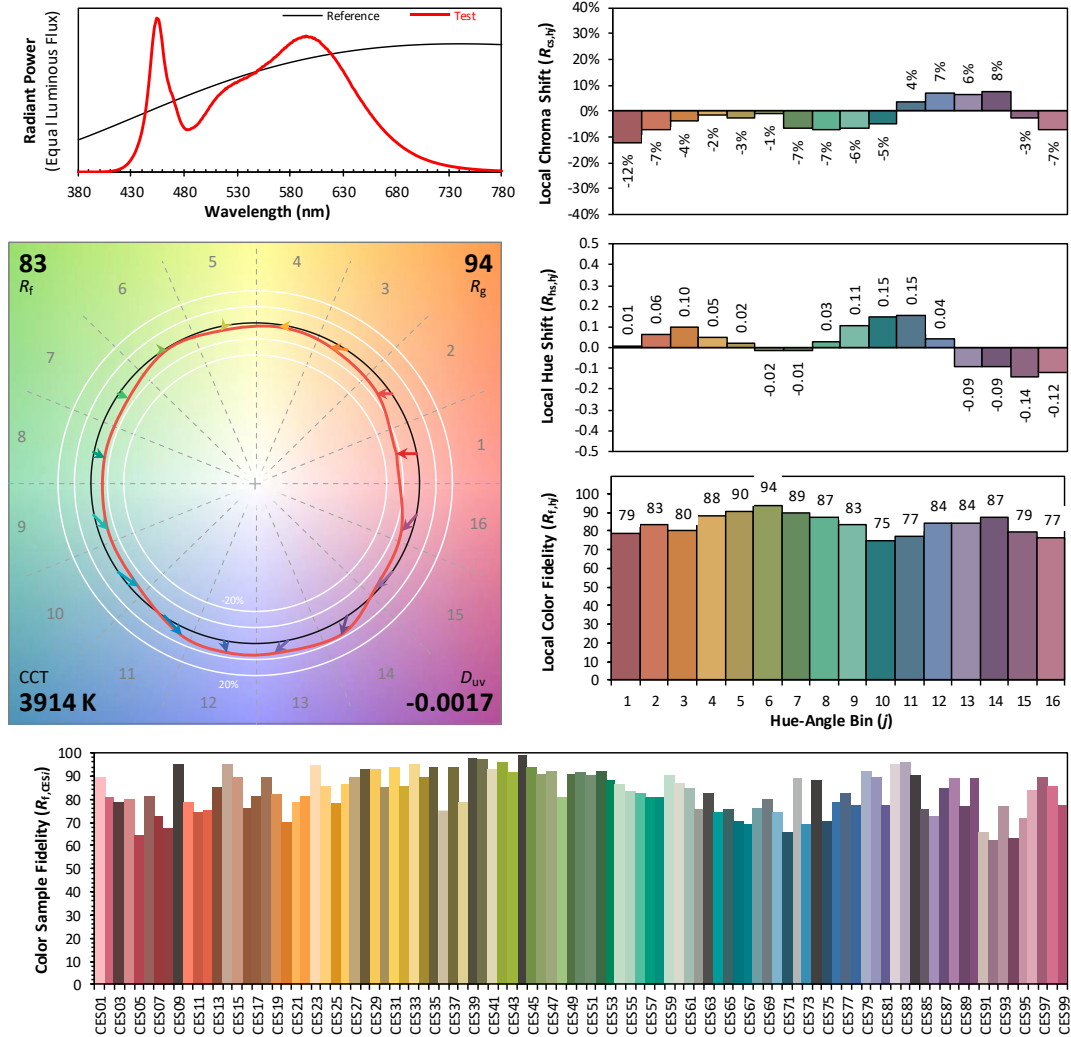

Notes: This is a recommended method for displaying IES TM-30-18 information.

x 0.3831
 y 0.3748
 u' 0.2276
 v' 0.5011

CIE 13.3-1995
(CRI)

R_a 84
 R_g 15

4.1 Integrating Sphere Test

Spectral Distribution over Visible Wavelength							
WL (nm)	Radiant (Watts/nm)	WL (nm)	Radiant (Watts/nm)	WL (nm)	Radiant (Watts/nm)	WL (nm)	Radiant (Watts/nm)
380	5.17E-04	485	1.26E-01	590	3.96E-01	695	5.66E-02
385	4.60E-04	490	1.34E-01	595	4.02E-01	700	4.80E-02
390	5.48E-04	495	1.50E-01	600	3.99E-01	705	4.11E-02
395	5.38E-04	500	1.72E-01	605	3.90E-01	710	3.51E-02
400	7.60E-04	505	1.96E-01	610	3.78E-01	715	2.99E-02
405	1.18E-03	510	2.17E-01	615	3.64E-01	720	2.53E-02
410	2.19E-03	515	2.34E-01	620	3.45E-01	725	2.16E-02
415	4.77E-03	520	2.46E-01	625	3.23E-01	730	1.84E-02
420	1.03E-02	525	2.57E-01	630	3.00E-01	735	1.57E-02
425	1.99E-02	530	2.65E-01	635	2.74E-01	740	1.33E-02
430	3.78E-02	535	2.73E-01	640	2.47E-01	745	1.11E-02
435	6.82E-02	540	2.81E-01	645	2.22E-01	750	9.60E-03
440	1.19E-01	545	2.90E-01	650	1.99E-01	755	8.14E-03
445	2.15E-01	550	3.01E-01	655	1.77E-01	760	6.96E-03
450	3.76E-01	555	3.12E-01	660	1.56E-01	765	5.85E-03
455	4.53E-01	560	3.24E-01	665	1.37E-01	770	5.07E-03
460	3.62E-01	565	3.38E-01	670	1.19E-01	775	4.26E-03
465	2.64E-01	570	3.51E-01	675	1.04E-01	780	3.59E-03
470	2.15E-01	575	3.67E-01	680	8.97E-02		
475	1.63E-01	580	3.80E-01	685	7.70E-02		
480	1.31E-01	585	3.89E-01	690	6.63E-02		

4.0 LM-79 Measurement and Test Results

4.2 Goniophotometer Test

Model No.	H15XLB @ 150W/4000K	Sample ID.	K1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.3	Humidity (%RH)	54.0

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using a type C goniophotometer and software.

The ambient temperature shall be maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$, measured at a point not more than 1 m from the sample and at the same height as the sample.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.

The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 0.5° vertical intervals and 10° horizontal intervals.

Test Conditions

Condition	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
WORST CASE	120.02	60	1.188	142.1	0.997
NON-WORST CASE	276.99	60	0.549	140.3	0.923


Test Result

Flux (lm)	Field Angle(10%)		Beam Angle(50%)		Luminous Efficacy (lm/W)
	C0-180	C90-270	C0-180	C90-270	
24142	122.3	123.5	85.4	84.1	169.9


Zonal Lumen Requirement (20° - 50°)	UGR ($X=4H$, $Y=8H$, 70/50/20%)
64.65%	25.7

4.2 Goniophotometer Test

Light Distrubtion Curve

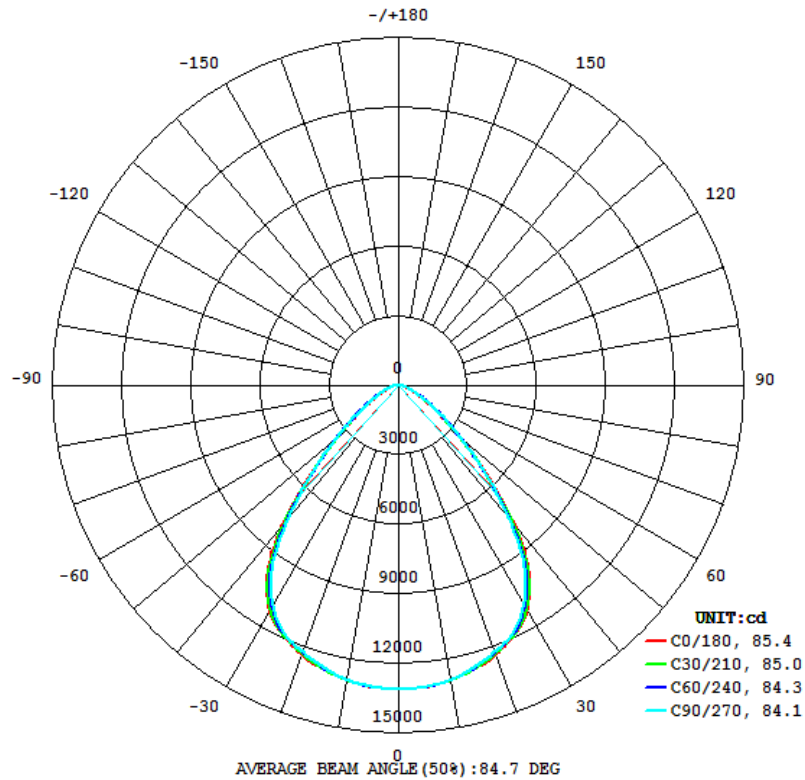

Isolux Plot

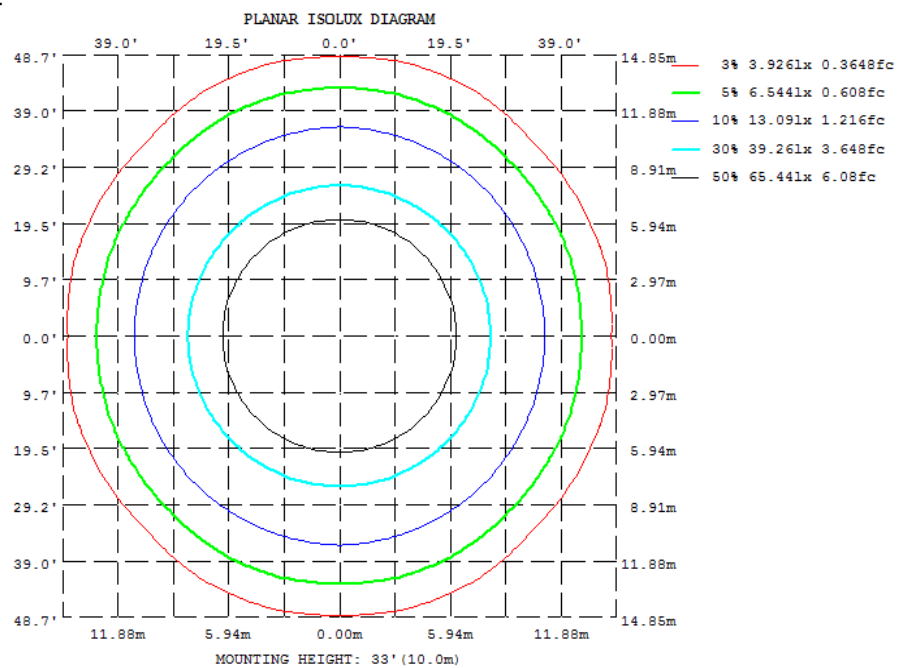

4.2 Goniophotometer Test

Zonal Lumen Summary

γ	C0	C45	C90	C135	C180	C225	C270	C315
10	1290	1291	1290	1291	1290	1291	1290	1291
20	1235	1226	1223	1226	1235	1226	1223	1226
30	1121	1107	1094	1107	1121	1107	1094	1107
40	789.4	766.6	747.6	766.6	789.4	766.6	747.6	766.6
50	353.5	352.9	361.5	352.9	353.5	352.9	361.5	352.9
60	144.9	144.3	152.4	144.3	144.9	144.3	152.4	144.3
70	60.29	61.07	64.31	61.07	60.29	61.07	64.31	61.07
80	22.57	23.10	24.06	23.10	22.57	23.10	24.06	23.10
90	0	0	0	0	0	0	0	0
100	0	0	0	0	0	0	0	0
110	0	0	0	0	0	0	0	0
120	0	0	0	0	0	0	0	0
130	0	0	0	0	0	0	0	0
140	0	0	0	0	0	0	0	0
150	0	0	0	0	0	0	0	0
160	0	0	0	0	0	0	0	0
170	0	0	0	0	0	0	0	0
180	0	0	0	0	0	0	0	0
DEG	LUMINOUS INTENSITY: ×10cd							

UGR Table - Corrected

UGR Table - Corrected											
Reflectances											
Ceiling Cavity		70	70	50	50	30	70	70	50	50	30
Walls		50	30	50	30	30	50	30	50	30	30
Floor Cavity		20	20	20	20	20	20	20	20	20	20
Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	24.0	25.3	24.3	25.6	25.9	23.8	25.1	24.1	25.4	25.7
	3H	24.7	25.9	25.0	26.2	26.6	24.4	25.6	24.8	26.0	26.3
	4H	24.9	26.0	25.3	26.4	26.7	24.7	25.8	25.1	26.1	26.5
	6H	25.1	26.1	25.5	26.4	26.8	24.8	25.8	25.2	26.2	26.6
	8H	25.1	26.1	25.5	26.5	26.9	24.8	25.8	25.3	26.2	26.6
	12H	25.1	26.0	25.6	26.4	26.9	24.9	25.8	25.3	26.2	26.6
4H	2H	24.1	25.2	24.5	25.6	25.9	23.9	25.0	24.3	25.4	25.8
	3H	25.0	25.9	25.4	26.3	26.7	24.8	25.7	25.2	26.1	26.5
	4H	25.3	26.1	25.8	26.6	27.0	25.1	25.9	25.5	26.3	26.8
	6H	25.6	26.3	26.0	26.7	27.2	25.3	26.0	25.8	26.5	26.9
	8H	25.7	26.3	26.1	26.8	27.2	25.4	26.0	25.9	26.5	27.0
	12H	25.7	26.3	26.2	26.8	27.2	25.4	26.0	25.9	26.5	27.0
8H	4H	25.4	26.0	25.9	26.5	27.0	25.2	25.8	25.6	26.3	26.7
	6H	25.7	26.2	26.2	26.7	27.2	25.5	26.0	26.0	26.5	27.0
	8H	25.8	26.3	26.3	26.8	27.3	25.6	26.1	26.1	26.6	27.1
	12H	25.9	26.3	26.4	26.8	27.4	25.7	26.1	26.2	26.6	27.2
12H	4H	25.4	25.9	25.9	26.4	26.9	25.1	25.7	25.6	26.2	26.7
	6H	25.7	26.2	26.2	26.7	27.2	25.5	25.9	26.0	26.4	27.0
	8H	25.9	26.3	26.4	26.8	27.3	25.6	26.0	26.1	26.5	27.1
Maximum UGR = 27.4											

4.2 Goniophotometer Test

ZONAL LUMEN SUMMARY

	Zonal (lm)		Total (lm)	Percent
0-10	1241.82	0 - 10	1241.82	5.14%
10-20	3567.94	0 - 20	4809.76	19.92%
20-30	5438.78	0 - 30	10248.54	42.45%
30-40	6000.59	0 - 40	16249.13	67.31%
40-50	4168.30	0 - 50	20417.43	84.57%
50-60	2155.88	0 - 60	22573.31	93.50%
60-70	1016.91	0 - 70	23590.22	97.71%
70-80	437.53	0 - 80	24027.75	99.53%
80-90	114.53	0 - 90	24142.28	100.00%
90-100	0.00	0 - 100	24142.28	100.00%
100-110	0.00	0 - 110	24142.28	100.00%
110-120	0.00	0 - 120	24142.28	100.00%
120-130	0.00	0 - 130	24142.28	100.00%
130-140	0.00	0 - 140	24142.28	100.00%
140-150	0.00	0 - 150	24142.28	100.00%
150-160	0.00	0 - 160	24142.28	100.00%
160-170	0.00	0 - 170	24142.28	100.00%
170-180	0.00	0 - 180	24142.28	100.00%

4.2 Goniophotometer Test


COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
R/W	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	89
2	104	97	92	88	101	96	91	87	92	88	85	89	86	83	86	83	81	79
3	96	88	82	76	94	87	81	76	84	79	74	81	77	73	79	75	72	70
4	90	80	73	67	88	79	72	67	76	71	66	74	69	65	72	68	64	62
5	84	73	65	60	82	72	65	60	70	64	59	68	63	58	66	62	58	56
6	78	67	59	54	76	66	59	53	64	58	53	63	57	53	61	56	52	50
7	73	61	54	48	71	61	53	48	59	53	48	58	52	48	57	51	47	46
8	68	57	49	44	67	56	49	44	55	48	44	53	48	43	52	47	43	41
9	64	52	45	40	63	52	45	40	51	44	40	50	44	40	49	43	40	38
10	60	49	42	37	59	48	41	37	47	41	37	46	41	36	46	40	36	35

CONE OF LIGHT DIAGRAM

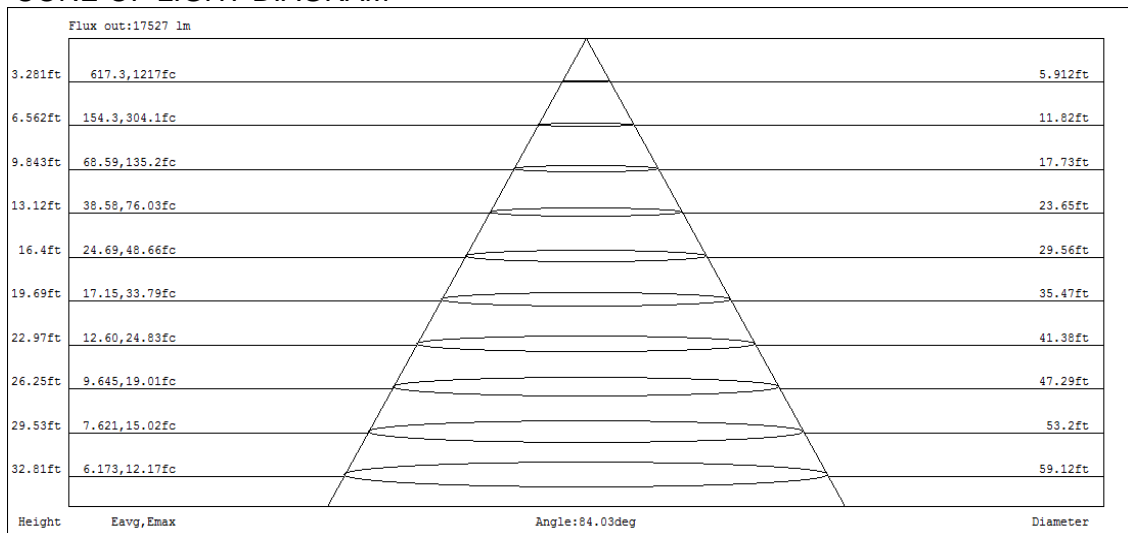

4.0 LM-79 Measurement and Test Results

4.3 THD and PF Test

Model No.	H15XLB @ 150W/4000K	Sample ID.	K1
Temperature (°C)	25.3	Humidity (%RH)	56.0

Test Method

The samples were tested according to the ANSI C82.77:2014.

The total harmonic distortion shall be measured to the 40th order.

The ambient temperature condition was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$. The sample measurements were made using a digital power meter and power supply. The sample was operated at rated voltage and was stabilized before measurement. The total harmonic distortion were calculated.

Test Results

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	THD
119.99	60	1.189	142.2	0.997	2.55%
276.99	60	0.549	140.4	0.923	12.49%

5.0 Equipment Information

Test Equipment			
Equipment ID	Equipment Name	Last Calibration Date	Calibration Due Date
DLF107	Integrating Sphere System	2023/12/24	2024/12/23
DLF108	Auxiliary Lamp	2023/12/24	2024/12/23
DLF122	Measurement Standard Lamp Standard Lamp Type: 220 V, 0.4720 A, Tungsten, Omni-directional	2023/12/24	2024/12/23
DLF116	AC Power Source	2023/12/16	2024/12/15
DLF516	Power Meter	2023/12/16	2024/12/15
DLF112	Temperature Recorder	2023/12/28	2024/12/27
DLF114	Temperature & Humidity Datalogger	2023/12/28	2024/12/27
DLF101	Goniophotometer	2023/12/24	2024/12/23
DLF511	AC Power Source	2023/12/16	2024/12/15
DLF512	AC Power Source	2023/12/16	2024/12/15
DLF513	AC Power Source	2023/12/16	2024/12/15
DLF507	DC Power Source	2023/12/16	2024/12/15
DLF111	Temperature & Humidity Datalogger	2023/12/28	2024/12/27
DLF119	Power Meter	2023/12/16	2024/12/15
DLF031	Temperature data logger	2023/6/22	2024/6/21
DLF073	Power Analyzer	2023/6/22	2024/6/21
DLF003	Temperature & Humidity Datalogger	2023/6/22	2024/6/21

***** End of Test Report*****