



Date of issue 2021-10-11
Version 1.0
Total pages 55

**Test report of
IES LM-79-08
Approved Method: Electrical and Photometric
Measurements of Solid-State Lighting Products**

Applicant:

RAB Lighting Inc

Address:

Northvale, New Jersey, 07647, USA

For Product:

LED Corn Lamp

Model No.:

HIDFA-63S-EX39-8CCT-BYP/3SP

Test laboratory: Shenzhen Belling Efficiency Testing Lab Co.,Ltd, 1Floor, No.1 Building, Meibaohu Industrial Park, Dalang Street, Longhua District, Shenzhen, Guangdong Prov.518101 China.

Jaky Li

Jason Zhou

Complied by: Jaky Li

Review by: Jason Zhou

Project Engineer

Technical Manager

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or use in part without prior written consent from Shenzhen Belling Efficiency Testing Lab Co.,Ltd. This report must not be used by the customer to claim product certification, approval, or endorsement By NVLAP, NIST, or any agency of the U.S. Government.



1 General

1.1 Product Information

Manufacturer	RAB Lighting Inc
Manufacturer Address	Northvale, New Jersey, 07647, USA
Brand Name	RAB
Luminaire Type	LED Corn Lamp
Model Number	HIDFA-63S-EX39-8CCT-BYP/3SP
Rated Inputs	AC 100-277V, 50/60Hz
Rated Power	63 W
Color-Tunable Product	Yes, CCT setting: 3000K / 4000K / 5000K
Date of Receipt Samples	2021-08-16
Date of test	2021-08-17 to 2021-08-27
Burning Time Before Test	0hour(For New Products)

1.2 Standards or methods

- ANSI C78.377-2017:Specifications for the Chromaticity of Solid State Lighting Products
- ANSI C82.77-10:2014:Harmonic Emission Limits - Related Power Quality Requirements for Lighting Equipment - Solid State
- CIE Publication No.13.3-1995:Method of Measuring and Specifying Color Rendering of Light Sources
- IESNA LM-79-08 Approved Method: Electric & Photometric Measurement of Solid-state Lighting Products

1.3 Description

- Declaration: RAB Lighting Inc declare that their product with model HIDFA-63S-EX39-8CCT-BYP/3SP are the same to the product in the report BL210817011-9 and is authorized by original applicant to use their test data.
- Note:All the data in previous report BL210817011-9 is shared in report.



1.4 Equipment list

Device	Manufacture	Model No.	Serial No.	Calibration due date
Goniophotometric System	SENSING	GMS-3000	N.A	2022-03-31
AC Power Source	ALL POWER	APW-110N	992257	2022-03-31
Total Luminous Flux Standard Lamp	SENSING	110V/100W	S1510065	2022-04-07
Total Spectral Radiant Flux Standard Lamp	SENSING	12V/20W	LSD12201731	2022-04-07
Digital Power Meter	YOKOGAWA	WT310	C2QM02030V	2022-03-31
Integral Sphere	SENSING	SPR-600M	N.A	2022-03-31
Digital Power Meter	YOKOGAWA	WT210	91L929742	2022-03-31
Optical Color and Electrical Measurement System	SENSING	SPR-3000	S1101108	2022-03-31
Environment Measurer	XUYAO	HS-1	N/A	2022-04-03
Environment Measurer	XUYAO	HS-1	N/A	2022-04-03
Stop watch	KISLO	K610	N/A	2022-04-22
Digital Anemometer	TECMAN	TD8901	026141	2021-09-09

Statement of Traceability: Shenzhen Belling Efficiency Testing Lab Co.,Ltd attests that all calibration has been performed using suitable standards traceable to national primary standards and International System of Unit (SI).



2 Test conducted and method

2.1 Ambient Condition

The ambient temperature in which measurements are being taken was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$, the air flow around the sample(s) being tested did not affect the performance.

2.2 Power Supply Characteristics

The AC power supply had a sinusoidal voltage wave shape at the prescribed frequency (60 Hz) such that the RMS summation of the harmonic components does not exceed 3 percent of the fundamental during operation of the test item.

The voltage of AC power supply (RMS voltage) applied to the device under test was regulated to within ± 0.2 percent under load.

2.3 Seasoning and Stabilization

No seasoning was performed in accordance with IESNA LM-79-08. And before the measurement, the sample was stabilized until the light output and power variations were less than 0.5% in 30 minutes intervals (3 readings, 15 minutes apart).

2.4 Integrating Sphere System

The system includes AC power source, digital power meter, DC power supply, spectrophotometer, and integrating sphere. The integrating sphere system is calibrated by standard light source before measurement. The system and standard light source has been calibrated regularly and traceable to the National Primary Standards. 4π geometry was used during measurement. The product was operated in its intended orientation in application and was recorded in this report.

Integrating Sphere Uncertainty: The uncertainty of the light output (luminous flux) measurements is $U=1.8\%$ ($K=2$), at the 95% confidence level. The uncertainty of the correlated color temperature measurements is $U=20\text{K}$ ($K=2$), at the 95% confidence level. The uncertainty of the CRI is $U=1.8(K=2)$, at the 95% confidence level. The uncertainty of power meter AC current $U=0.18\%$ of rdg, AC Voltage $U=0.16\%$ of rdg, Power $U=0.20\%$ ($K=2$), at the 95% confidence level.



2.5 Goniophotometer System

The goniophotometer system is calibrated by standard light source before measurement. The standard light source has been calibrated regularly and traceable to the National Primary Standards.

Type C goniophotometer was used for measuring total luminous flux, luminous intensity distribution, and color spatial uniformity. The product was operated in its intended orientation in application and was recorded in this report. The method according to IESNA LM-79-08 following chapter.

Goniophotometer Uncertainty :The uncertainty of the luminous intensity is $U=1.6\%$ ($K=2$), at the 95% confidence level.



3 Test Result Summary

3.1 Integrating Sphere System (Total operating time for integrating sphere test: 1.0 hour)

3.1.1 Model Number: HIDFA-63S-EX39-8CCT-BYP/3SP, 3000K at 120V

Electrical data

Input Voltage(V)	Frequency (Hz)	Input Current (A)	Power (W)	Power Factor
120.08	60	0.524	62.20	0.989

Photometric data

Luminous Flux (lm)	Efficacy (lm/W)	CCT (K)
8023.82	129.0	3055


Chromaticity Coordinate

Duv	x	y	u'	v'
-0.00114	0.4315	0.3993	0.2491	0.5187

Color Rendering


CRI	R9	Rf	Rg	Rcs,h1(%)
85.5	19	86	96	-10

Spectral Distribution

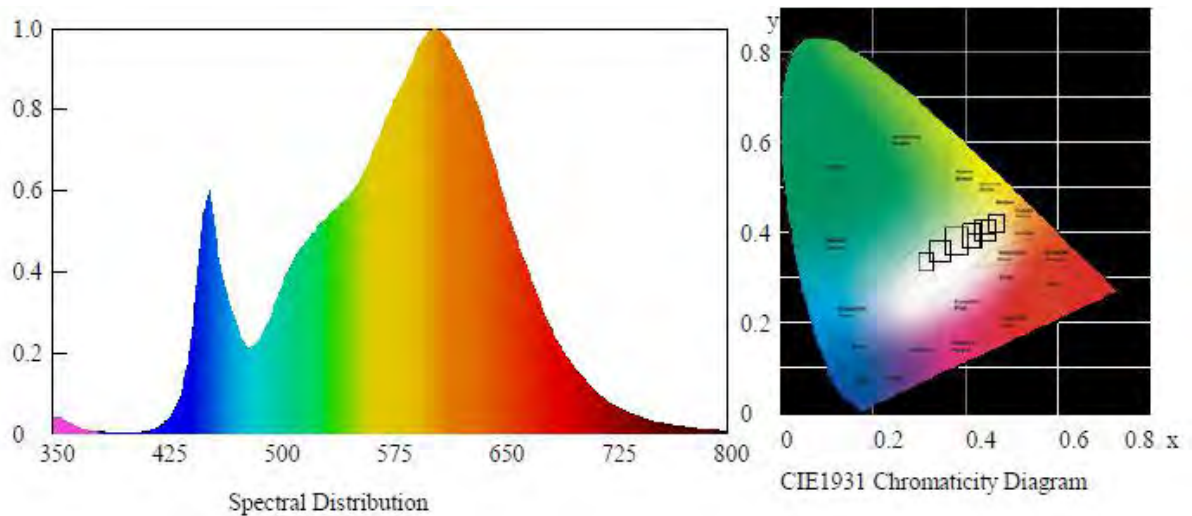



7/4 Step Quadrangle






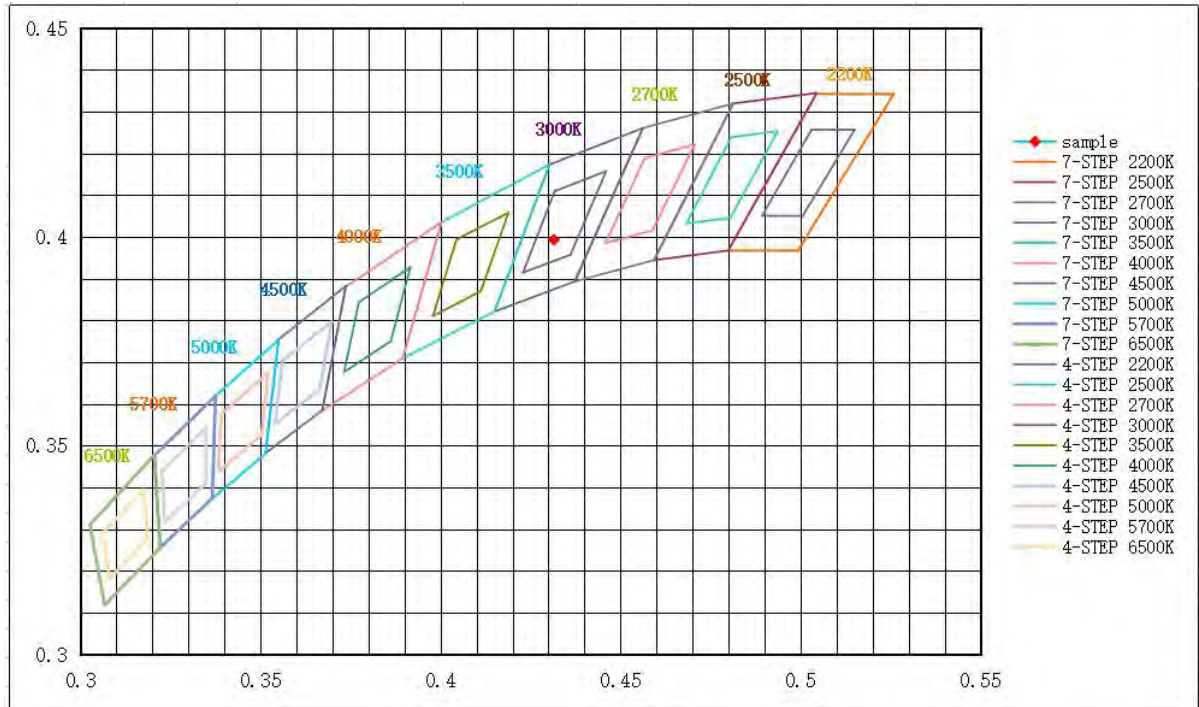




ANSI/IES TM-30-18 Color Rendition Report

Source: BL210817027-9
 Date: 2021-10-11

Manufacturer: RAB Lighting Inc
 Model: HIDFA-63S-EX39-8CCT-BYP/3SP, 3000K at 120V

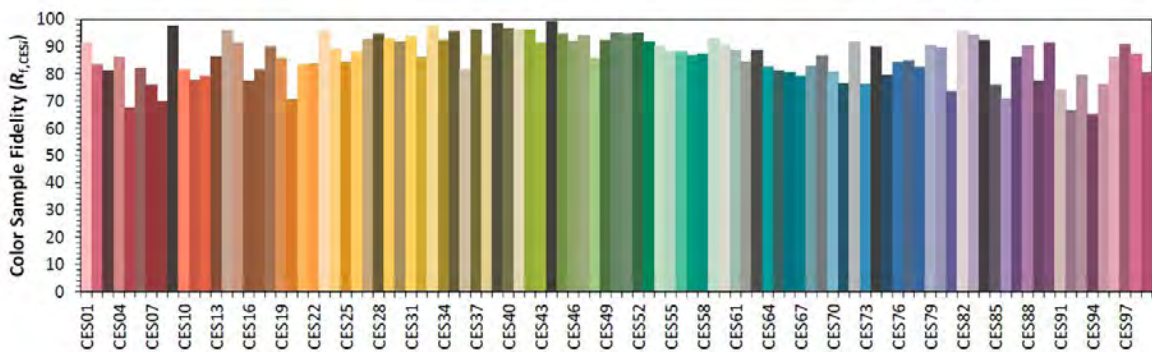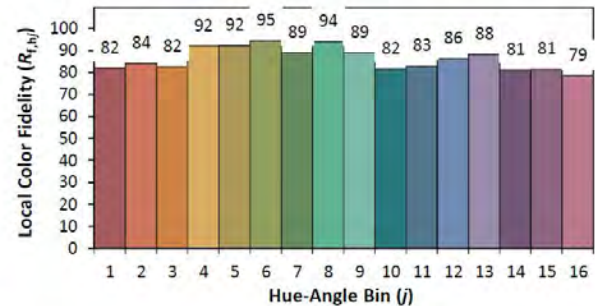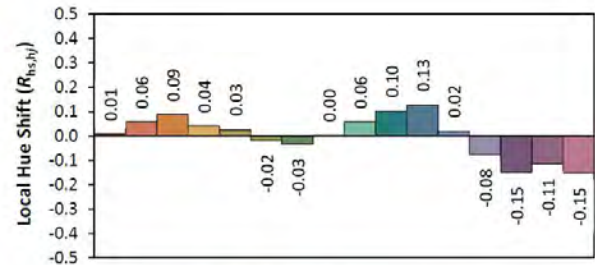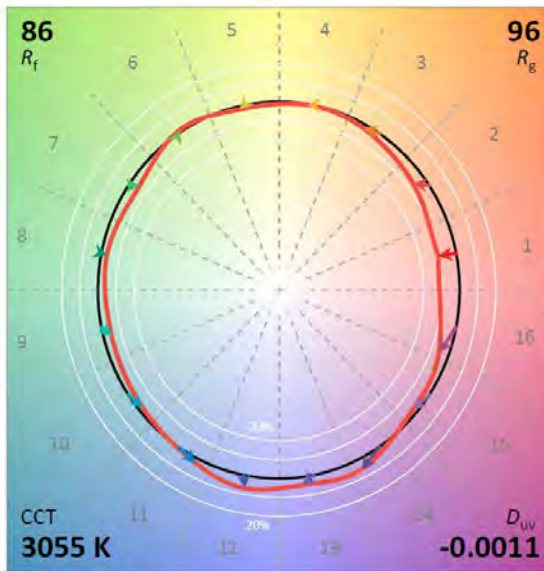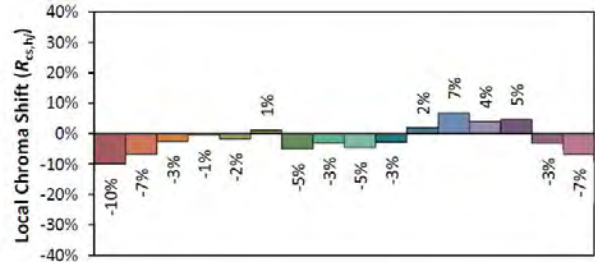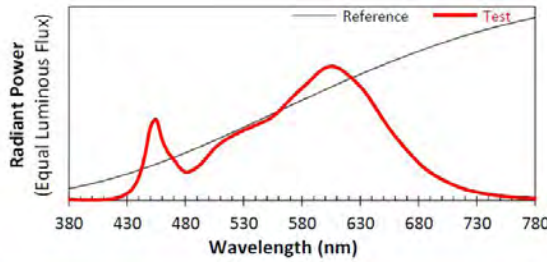

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.4315
 y 0.3993
 u' 0.2491
 v' 0.5187

CIE 13.3-1995 (CRI)	
R_a	86
R_9	19

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.



3.1.2 Model Number: HIDFA-63S-EX39-8CCT-BYP/3SP, 4000K at 120V

Electrical data

Input Voltage(V)	Frequency (Hz)	Input Current (A)	Power (W)	Power Factor
120.01	60	0.509	60.44	0.989

Photometric data

Luminous Flux (lm)	Efficacy (lm/W)	CCT (K)
8715.51	144.2	3901



Chromaticity Coordinate

Duv	x	y	u'	v'
-0.0018	0.3836	0.3748	0.2279	0.5012

Color Rendering


CRI	R9	Rf	Rg	Rcs,h1(%)
85.2	21	85	97	-10

Spectral Distribution

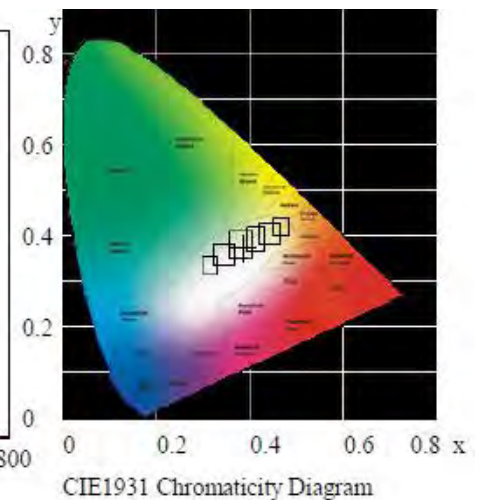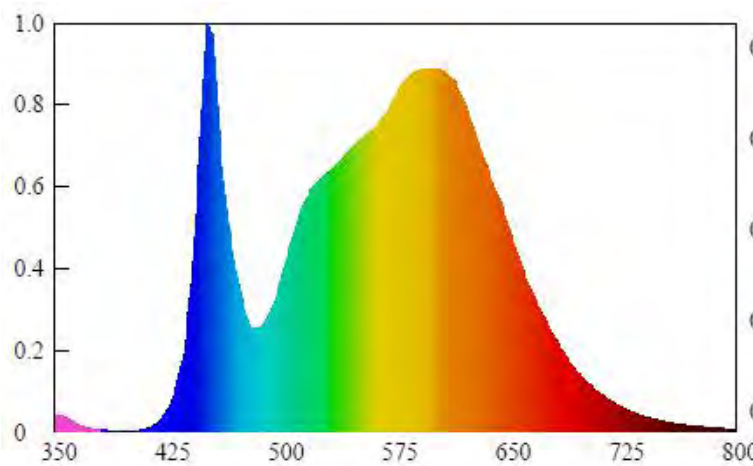



7/4 Step Quadrangle






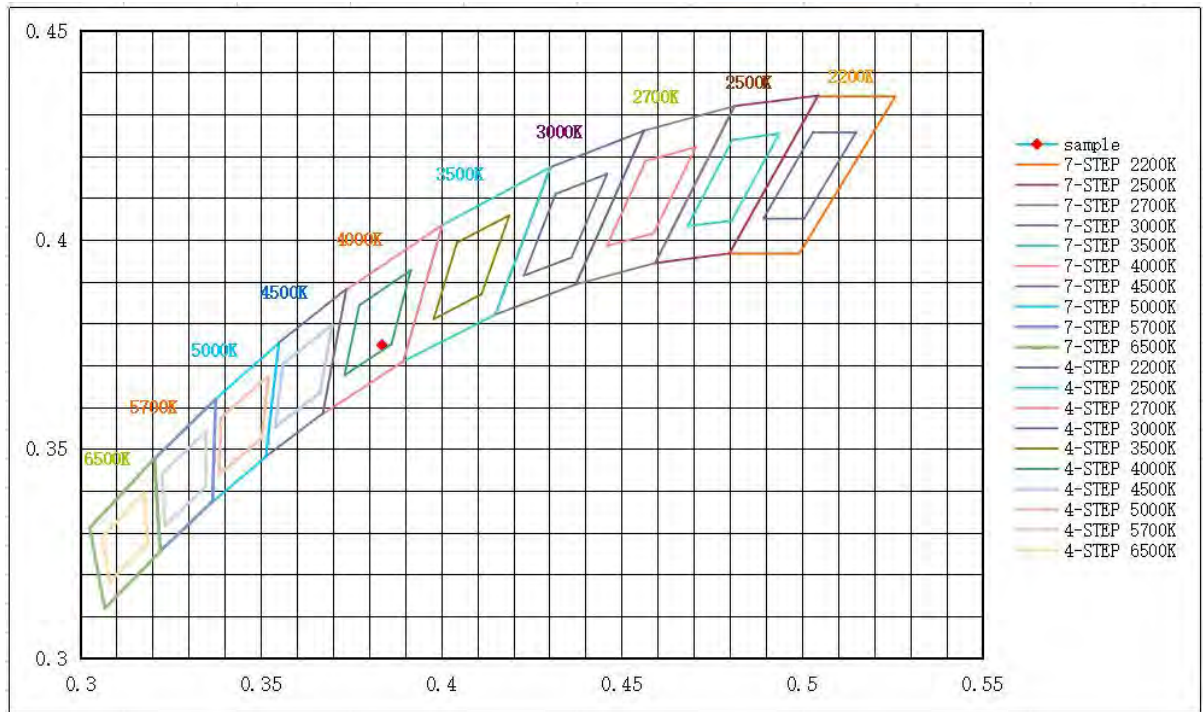




ANSI/IES TM-30-18 Color Rendition Report

Source: BL210817027-9
 Date: 2021-10-11

Manufacturer: RAB Lighting Inc
 Model: HIDFA-63S-EX39-8CCT-BYP/3SP, 4000K at 120V

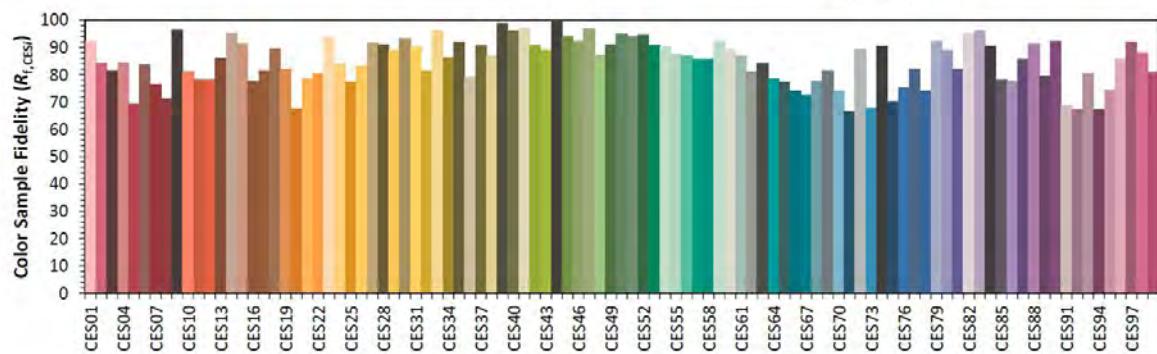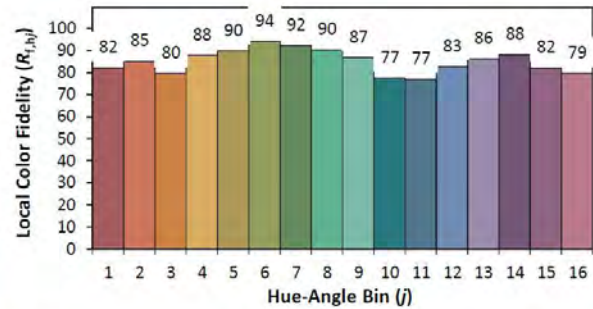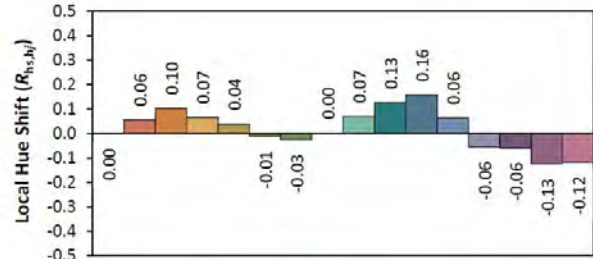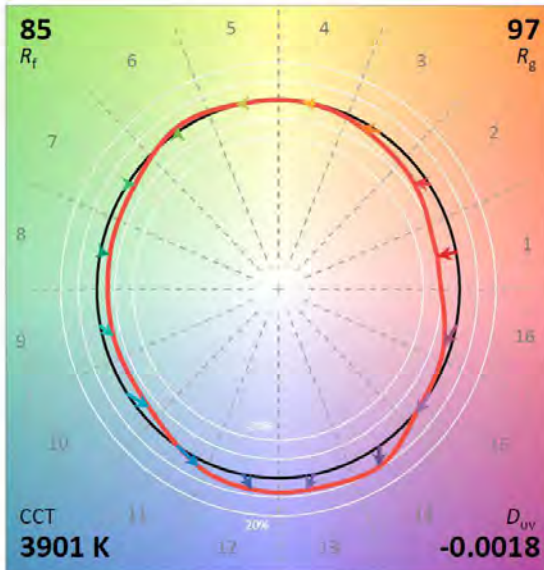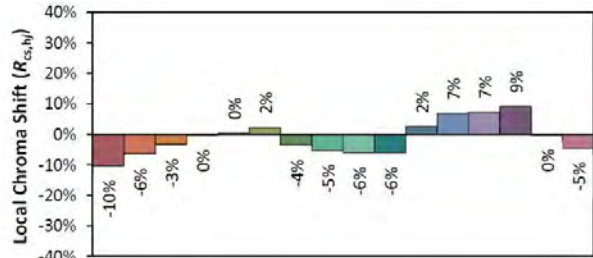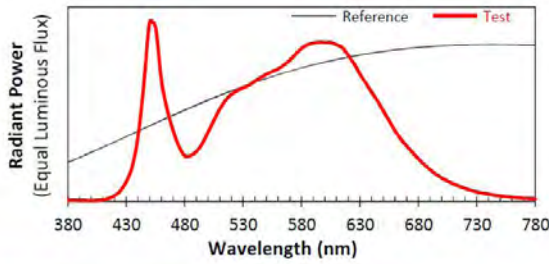

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.3836
 y 0.3748
 u' 0.2279
 v' 0.5012

CIE 13.3-1995 (CRI)
 R_a 85
 R_g 21

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.



3.1.3 Model Number: HIDFA-63S-EX39-8CCT-BYP/3SP, 5000K at 120V

Electrical data

Input Voltage(V)	Frequency (Hz)	Input Current (A)	Power (W)	Power Factor
120.01	60	0.520	61.77	0.989

Photometric data

Luminous Flux (lm)	Efficacy (lm/W)	CCT (K)
8542.76	138.3	4794


Chromaticity Coordinate

Duv	x	y	u'	v'
+0.00093	0.3514	0.3585	0.2130	0.4889

Color Rendering


CRI	R9	Rf	Rg	Rcs,h1(%)
81.8	10	82	97	-12

Spectral Distribution

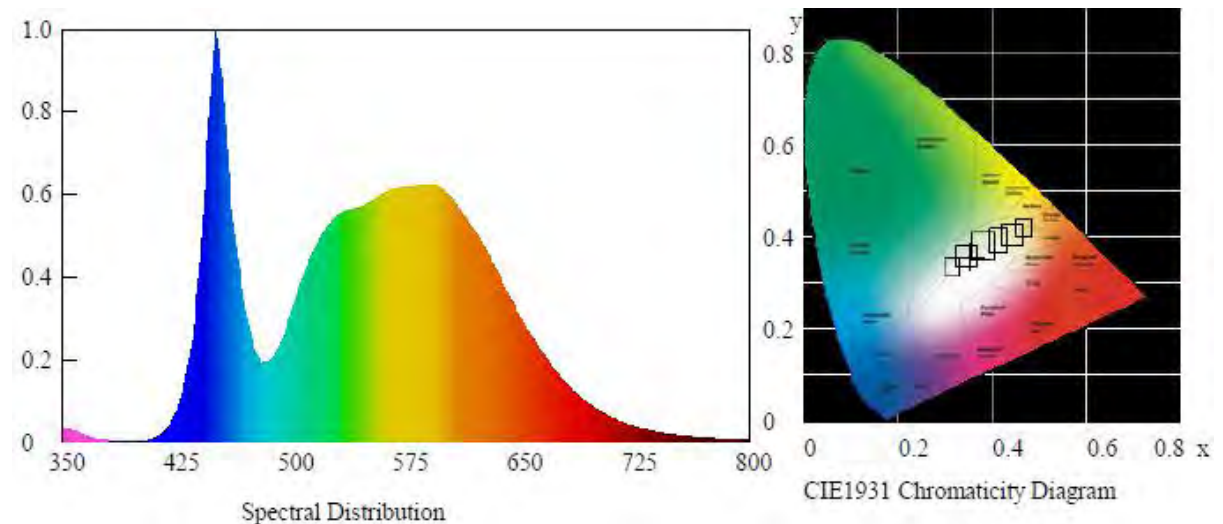



7/4 Step Quadrangle






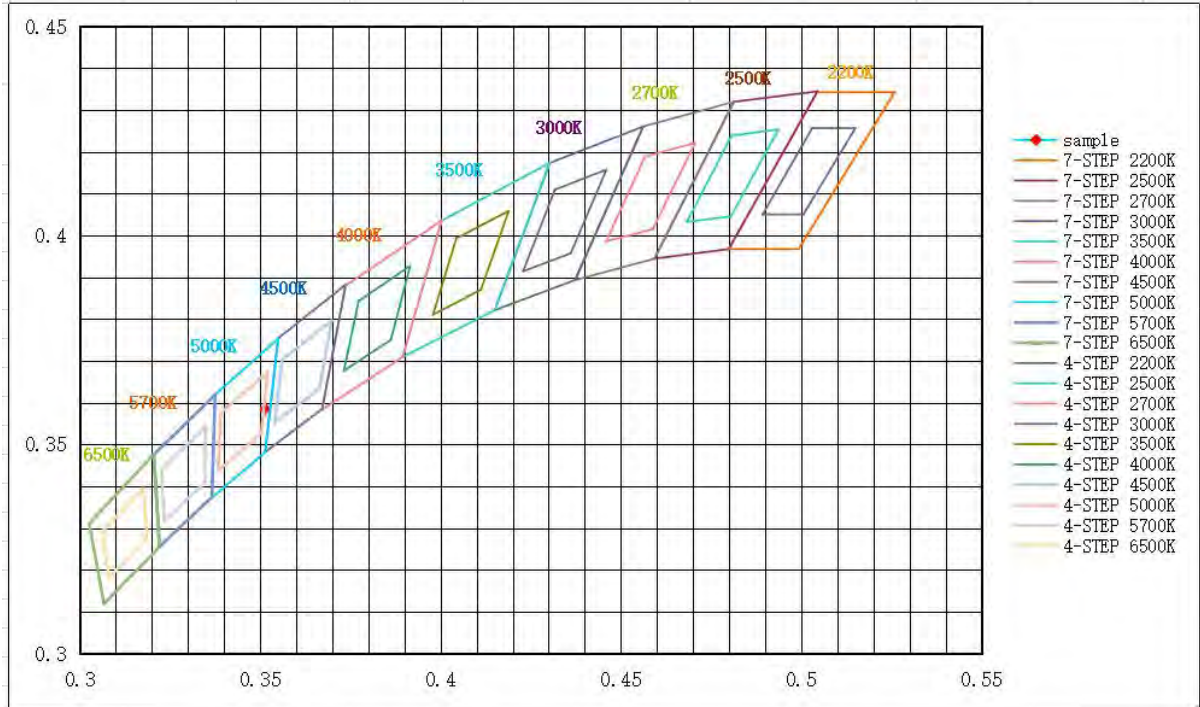




ANSI/IES TM-30-18 Color Rendition Report

Source: BL210817027-9
 Date: 2021-10-11

Manufacturer: RAB Lighting Inc
 Model: HIDFA-63S-EX39-8CCT-BYP/3SP, 5000K at 120V

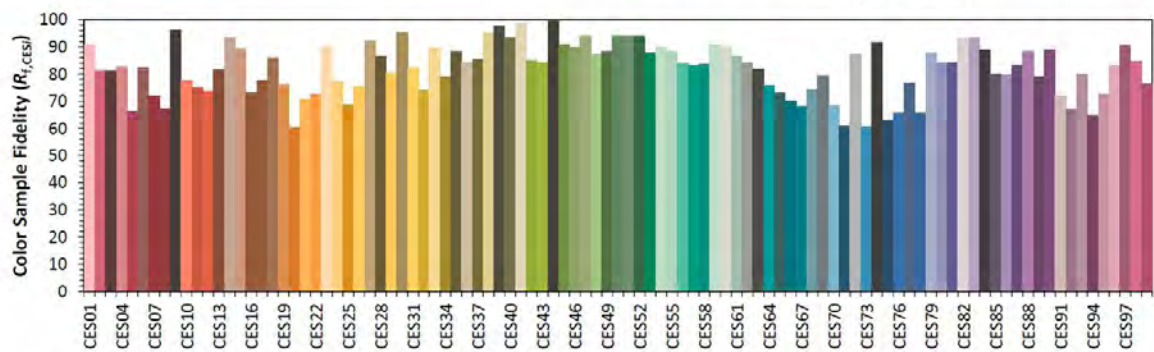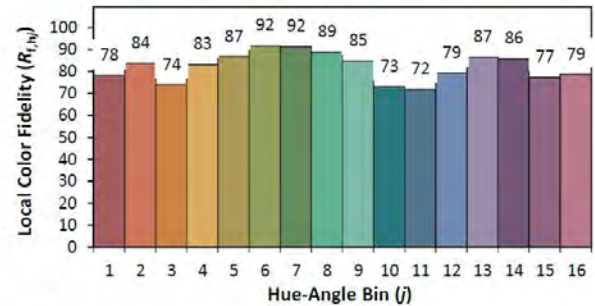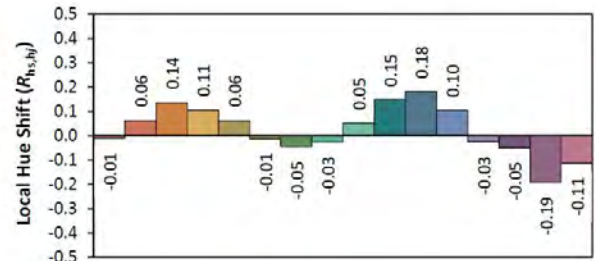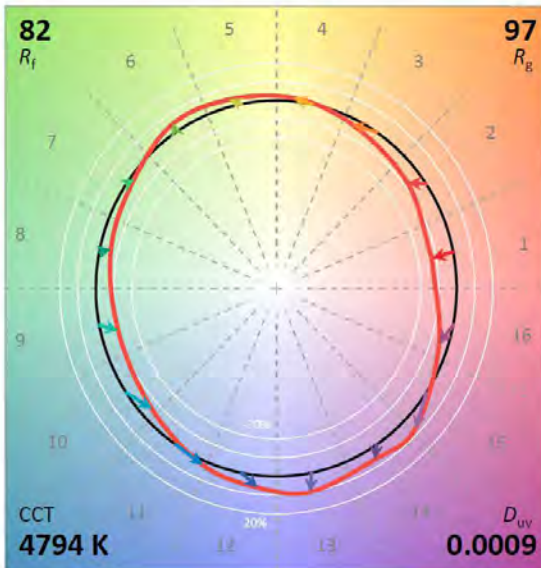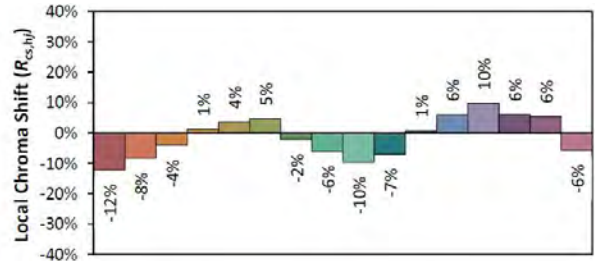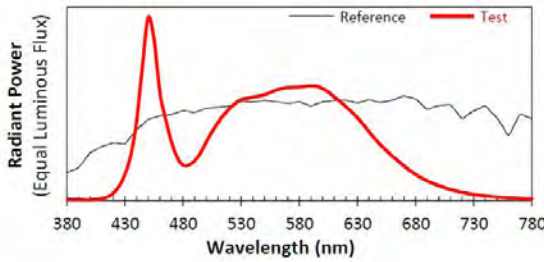

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.3514
 y 0.3585
 u' 0.2130
 v' 0.4889

CIE 13.3-1995 (CRI)
 R_a 82
 R_g 10

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.



3.1.4 Model Number: HIDFA-63S-EX39-8CCT-BYP/3SP, 3000K at 277V

Electrical data

Input Voltage(V)	Frequency (Hz)	Input Current (A)	Power (W)	Power Factor
277.07	60	0.255	63.88	0.904

Photometric data

Luminous Flux (lm)	Efficacy (lm/W)	CCT (K)
8336.32	130.5	3061



Chromaticity Coordinate

Duv	x	y	u'	v'
-0.00131	0.4308	0.3987	0.2489	0.5183

Color Rendering


CRI	R9	Rf	Rg	Rcs,h1(%)
85.4	19	86	96	-10

Spectral Distribution

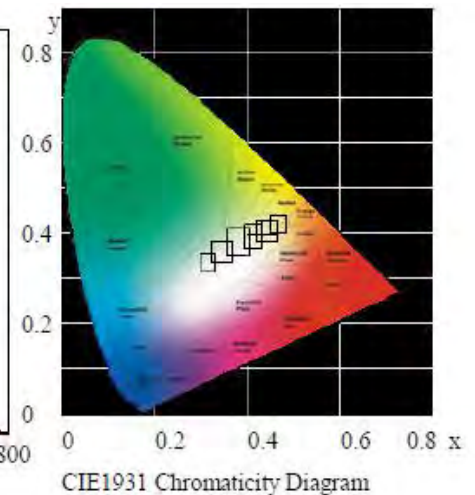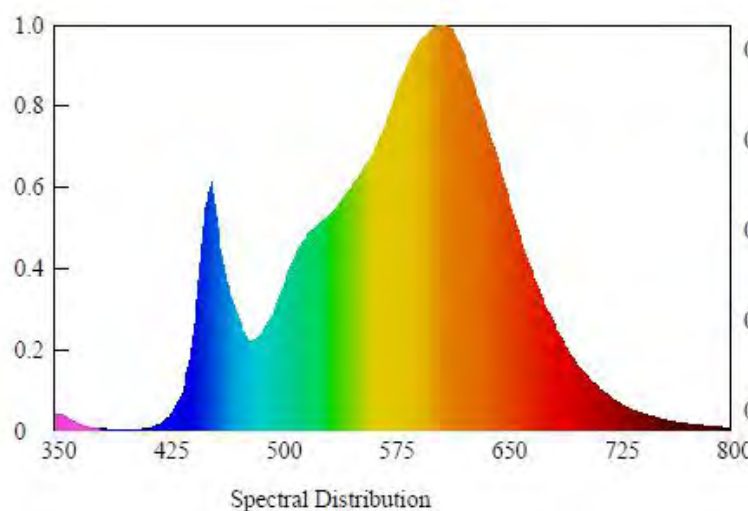



7/4 Step Quadrangle






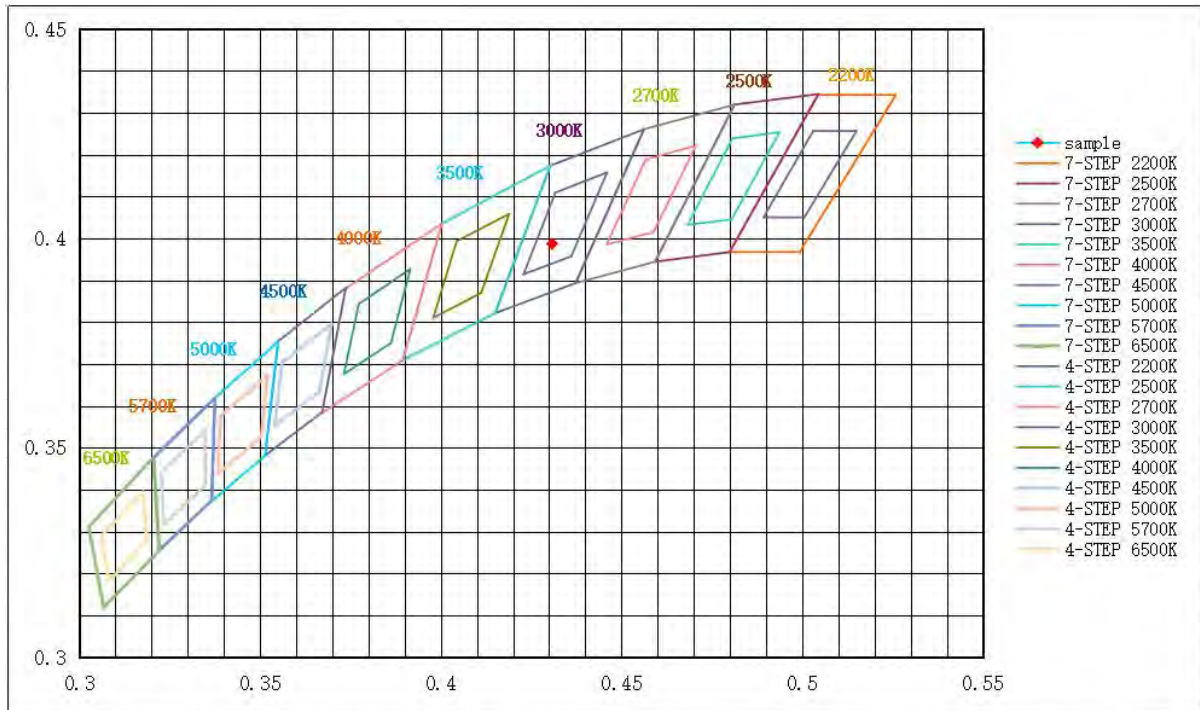




ANSI/IES TM-30-18 Color Rendition Report

Source: BL210817027-9
 Date: 2021-10-11

Manufacturer: RAB Lighting Inc
 Model: HIDFA-63S-EX39-8CCT-BYP/3SP, 3000K at 277V

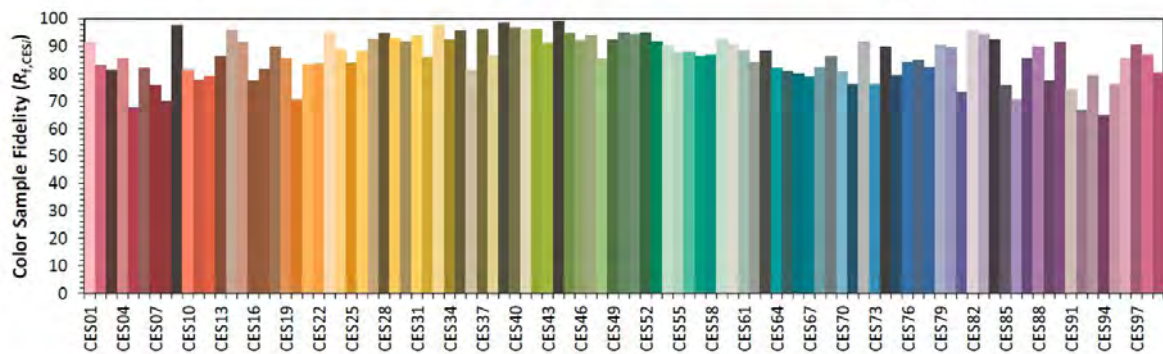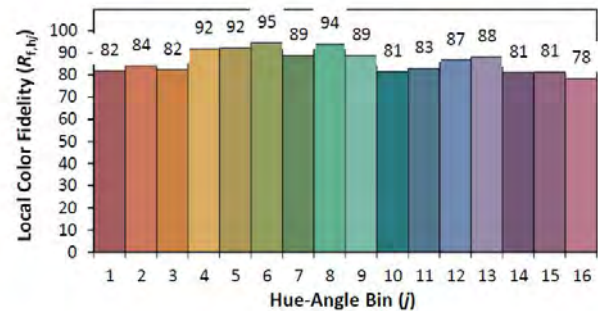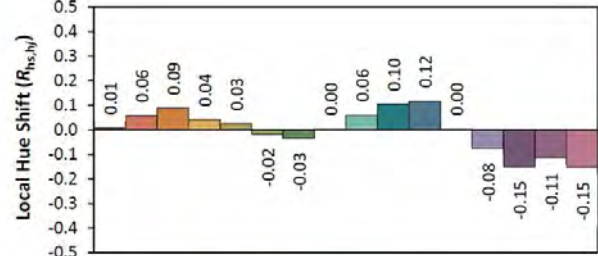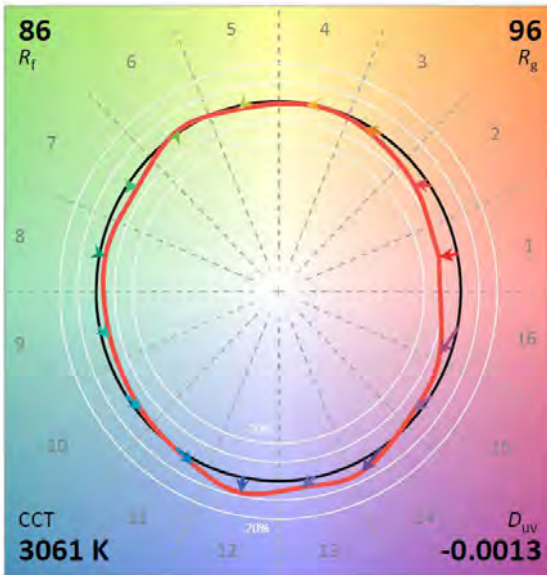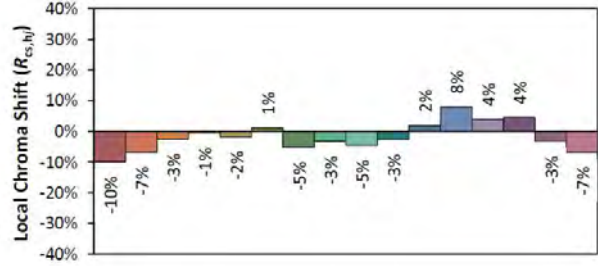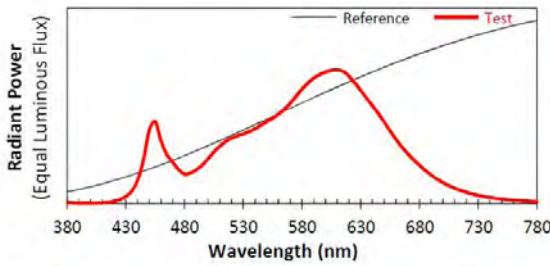

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.4308
 y 0.3987
 u' 0.2489
 v' 0.5183

CIE 13.3-1995 (CRI)	
R_a	85
R_g	19

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.



3.1.5 Model Number: HIDFA-63S-EX39-8CCT-BYP/3SP, 4000K at 277V

Electrical data

Input Voltage(V)	Frequency (Hz)	Input Current (A)	Power (W)	Power Factor
277.06	60	0.249	62.12	0.901

Photometric data

Luminous Flux (lm)	Efficacy (lm/W)	CCT (K)
9094.35	146.4	3899



Chromaticity Coordinate

Duv	x	y	u'	v'
-0.00171	0.3837	0.3751	0.2279	0.5013

Color Rendering


CRI	R9	Rf	Rg	Rcs,h1(%)
85.2	21	85	97	-10

Spectral Distribution

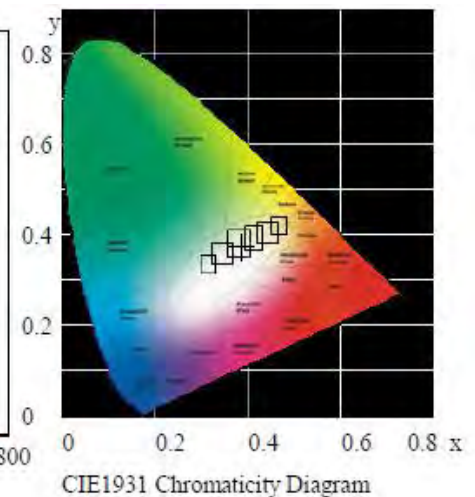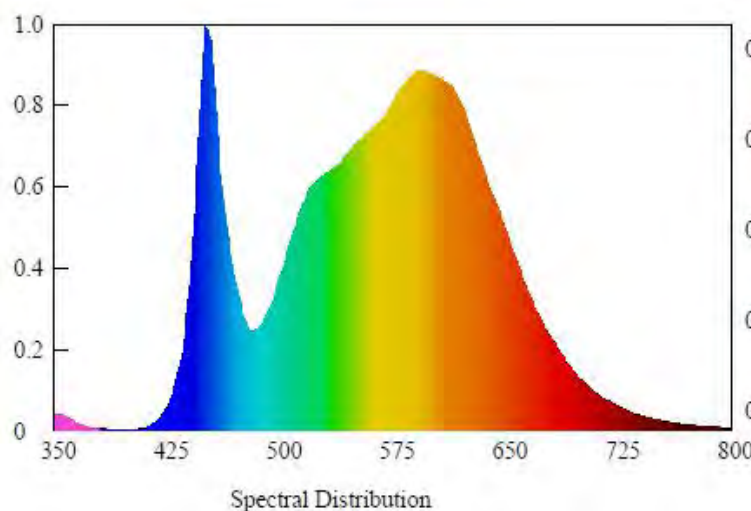



7/4 Step Quadrangle






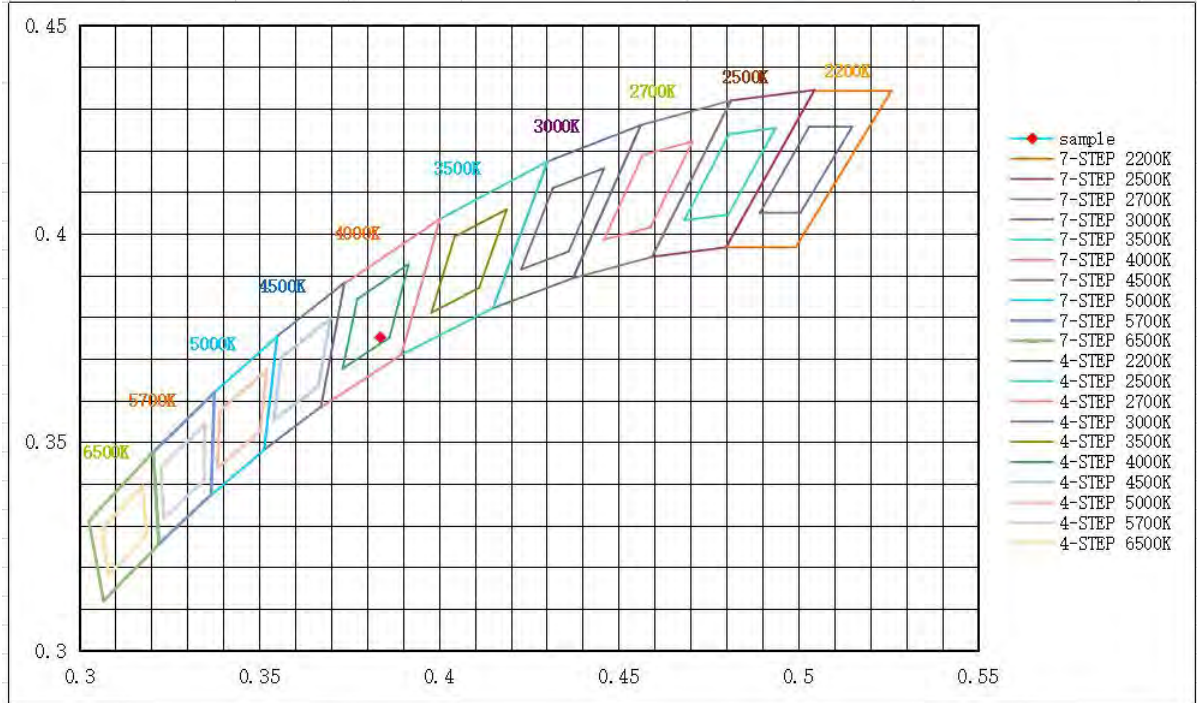




ANSI/IES TM-30-18 Color Rendition Report

Source: BL210817027-9
 Date: 2021-10-11

Manufacturer: RAB Lighting Inc
 Model: HIDFA-63S-EX39-8CCT-BYP/3SP, 4000K at 277V

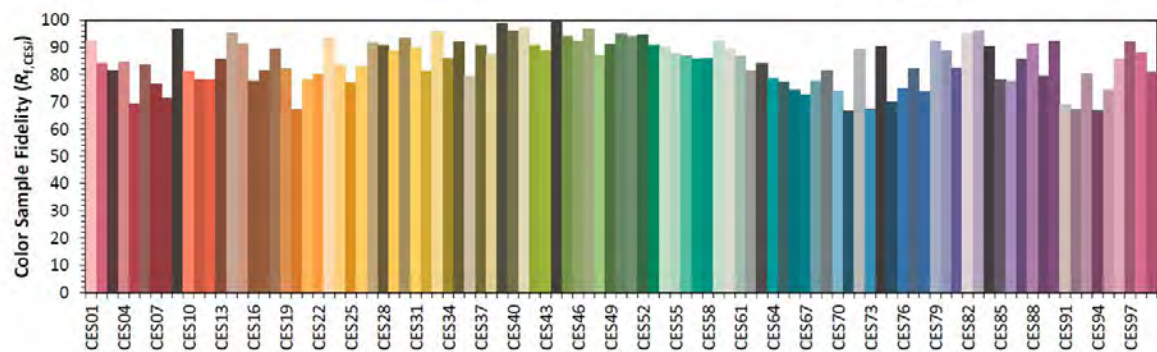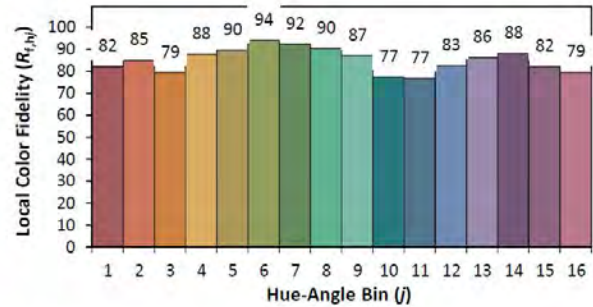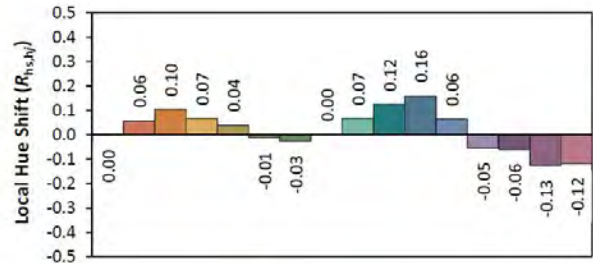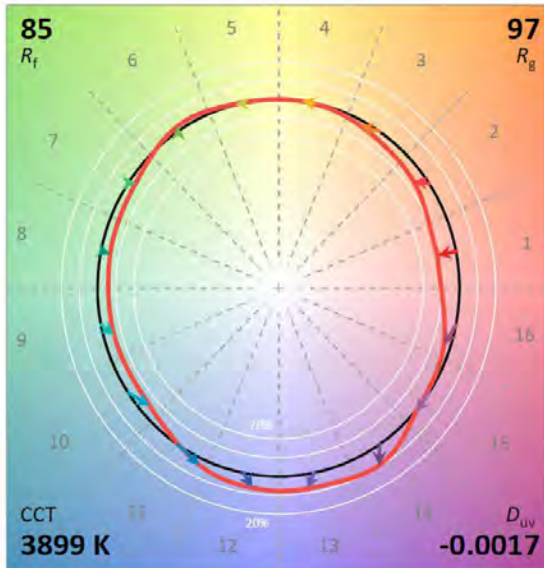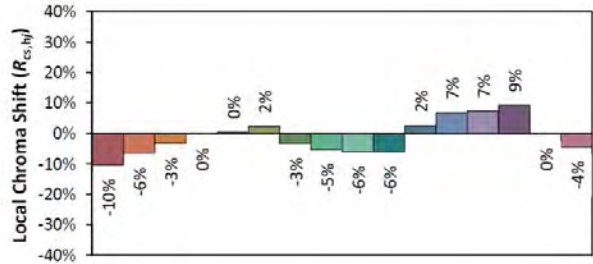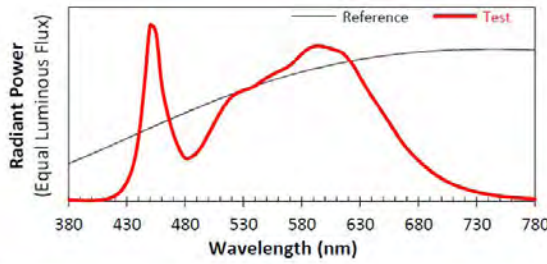

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.3837
 y 0.3751
 u' 0.2279
 v' 0.5013

CIE 13.3-1995 (CRI)
 R_a 85
 R_g 21

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.



3.1.6 Model Number: HIDFA-63S-EX39-8CCT-BYP/3SP, 5000K at 277V

Electrical data

Input Voltage(V)	Frequency (Hz)	Input Current (A)	Power (W)	Power Factor
277.06	60	0.254	63.54	0.904

Photometric data

Luminous Flux (lm)	Efficacy (lm/W)	CCT (K)
8787.58	138.3	4806


Chromaticity Coordinate

Duv	x	y	u'	v'
+0.00068	0.3510	0.3576	0.2131	0.4884

Color Rendering


CRI	R9	Rf	Rg	Rcs,h1(%)
82.0	10	82	97	-12

Spectral Distribution

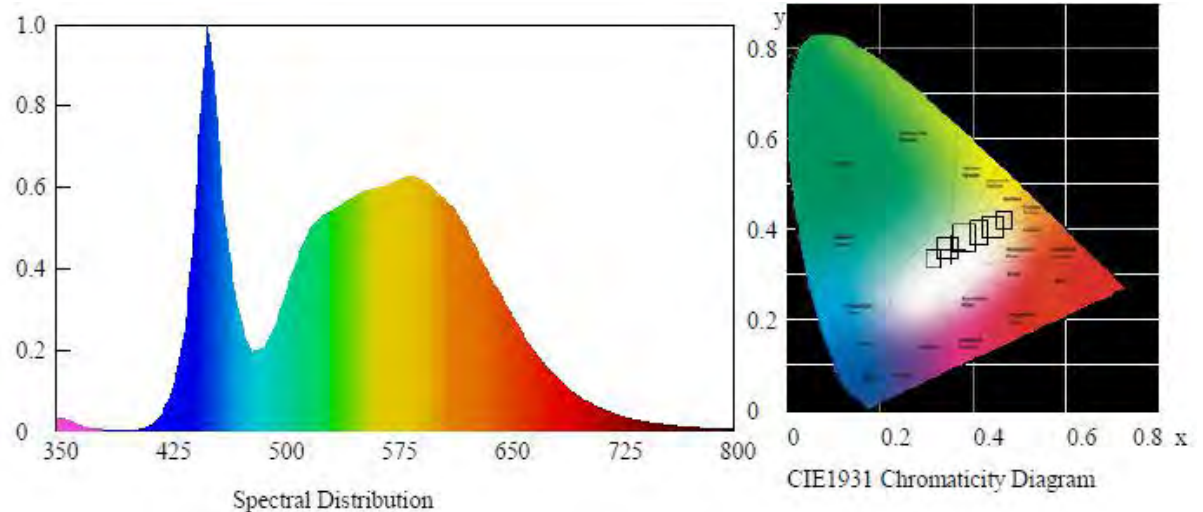



7/4 Step Quadrangle






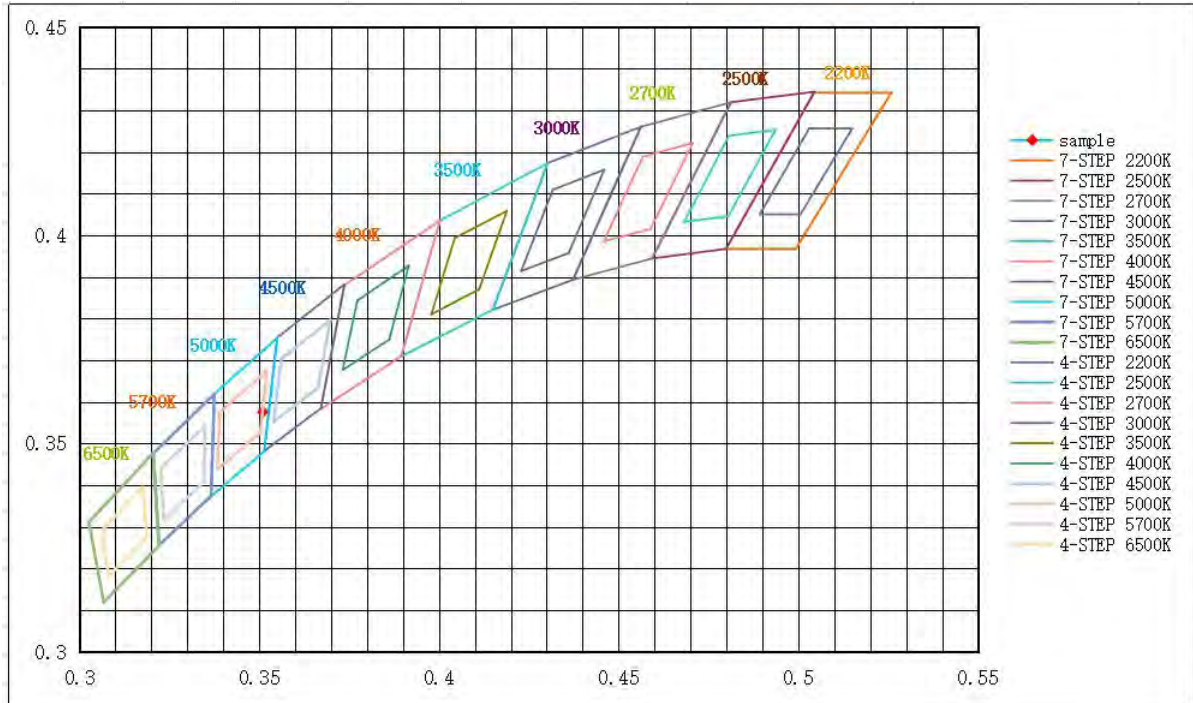




ANSI/IES TM-30-18 Color Rendition Report

Source: BL210817027-9
 Date: 2021-10-11

Manufacturer: RAB Lighting Inc
 Model: HIDFA-63S-EX39-8CCT-BYP/3SP, 5000K at 277V

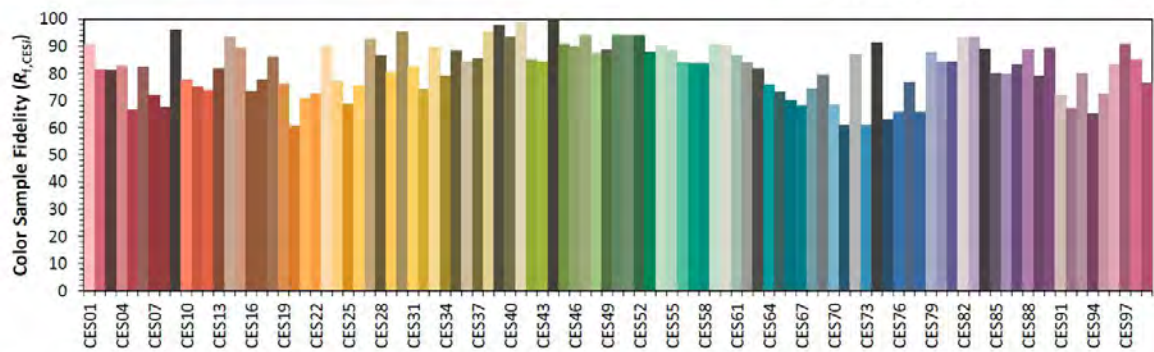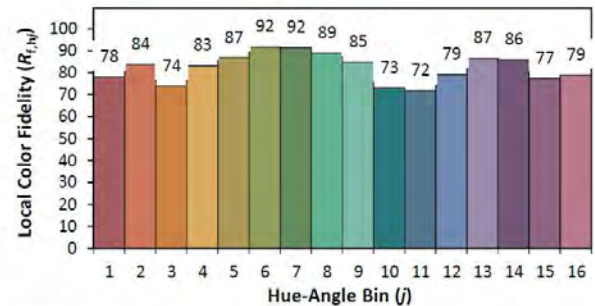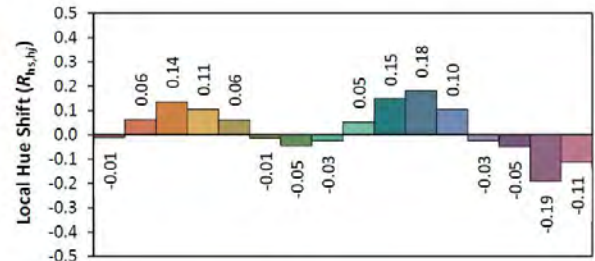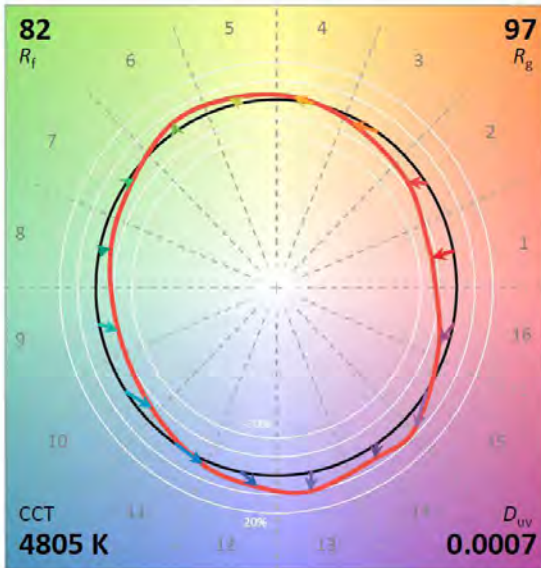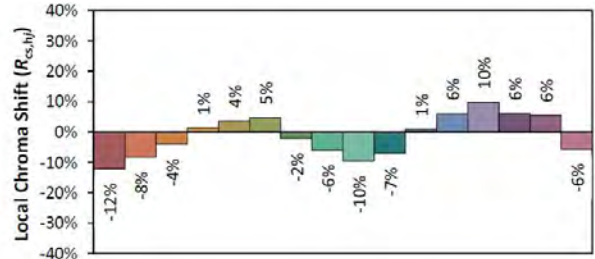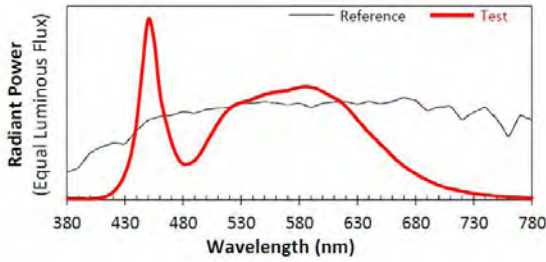

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.3510
 y 0.3576
 u' 0.2131
 v' 0.4884

CIE 13.3-1995 (CRI)
 R_a 82
 R_g 10

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.



3.2 Goniophotometer System (Total operating time for luminous intensity distribution: 1.0 hour)

3.2.1 Model Number: HIDFA-63S-EX39-8CCT-BYP/3SP, 3000K at 120V

Electrical data

Input Voltage(V)	Frequency (Hz)	Input Current (A)	Power (W)	Power Factor
120.090	60	0.520	61.650	0.987

Photometric data

Luminous Flux (lm)	Efficacy (lm/W)	Zonal Lumen in 0-60°(%lm)	Zonal Lumen in 0-90°(%lm)
7941.74	128.82	27.29	57.12



Zonal Flux Diagram

Zonal flux distribution table



7

$\gamma(^{\circ})$	Average I(cd)	Zonal F(lm)	Sum F(lm)	Eff Flux(%)	Eff Sum(%)
0.0	415.091	0.000	0	0.00%	0.00%
5.0	420.841	9.993	9.993	0.00%	0.13%
10.0	444.548	30.958	40.951	0.00%	0.52%
15.0	487.367	55.281	96.232	0.00%	1.21%
20.0	538.539	84.549	180.781	0.00%	2.28%
25.0	591.075	118.476	299.256	0.00%	3.77%
30.0	649.364	156.979	456.235	0.00%	5.74%
35.0	700.844	198.828	655.062	0.00%	8.25%
40.0	735.877	239.706	894.769	0.00%	11.27%
45.0	755.208	276.086	1170.855	0.00%	14.74%
50.0	765.028	307.186	1478.041	0.00%	18.61%
55.0	768.670	333.477	1811.518	0.00%	22.81%
60.0	772.029	356.128	2167.646	0.00%	27.29%
65.0	772.197	375.404	2543.05	0.00%	32.02%
70.0	759.931	387.945	2930.995	0.00%	36.91%
75.0	748.065	394.166	3325.161	0.00%	41.87%
80.0	746.096	399.796	3724.957	0.00%	46.90%
85.0	743.200	404.677	4129.634	0.00%	52.00%
90.0	741.128	406.421	4536.055	0.00%	57.12%
95.0	734.860	404.137	4940.192	0.00%	62.21%
100.0	729.468	397.893	5338.085	0.00%	67.22%
105.0	715.388	386.603	5724.688	0.00%	72.08%
110.0	689.725	367.274	6091.962	0.00%	76.71%
115.0	657.344	341.086	6433.048	0.00%	81.00%
120.0	623.405	311.352	6744.401	0.00%	84.92%
125.0	574.897	276.984	7021.385	0.00%	88.41%
130.0	519.195	237.892	7259.277	0.00%	91.41%
135.0	457.238	197.303	7456.579	0.00%	93.89%
140.0	394.959	157.791	7614.371	0.00%	95.88%
145.0	332.308	121.339	7735.71	0.00%	97.41%
150.0	265.782	88.073	7823.782	0.00%	98.51%
155.0	197.776	58.664	7882.446	0.00%	99.25%
160.0	133.219	34.715	7917.161	0.00%	99.69%
165.0	74.505	17.119	7934.281	0.00%	99.91%
170.0	28.559	6.114	7940.394	0.00%	99.98%
175.0	6.628	1.259	7941.653	0.00%	100.00%
180.0	0.982	0.091	7941.744	0.00%	100.00%



Luminous Intensity Distribution Diagram

Light Distribution Curve [Unit:cd]

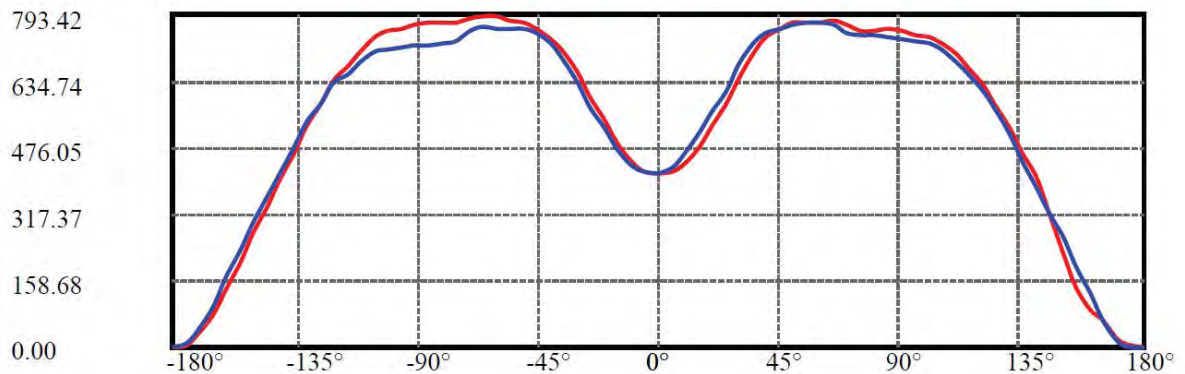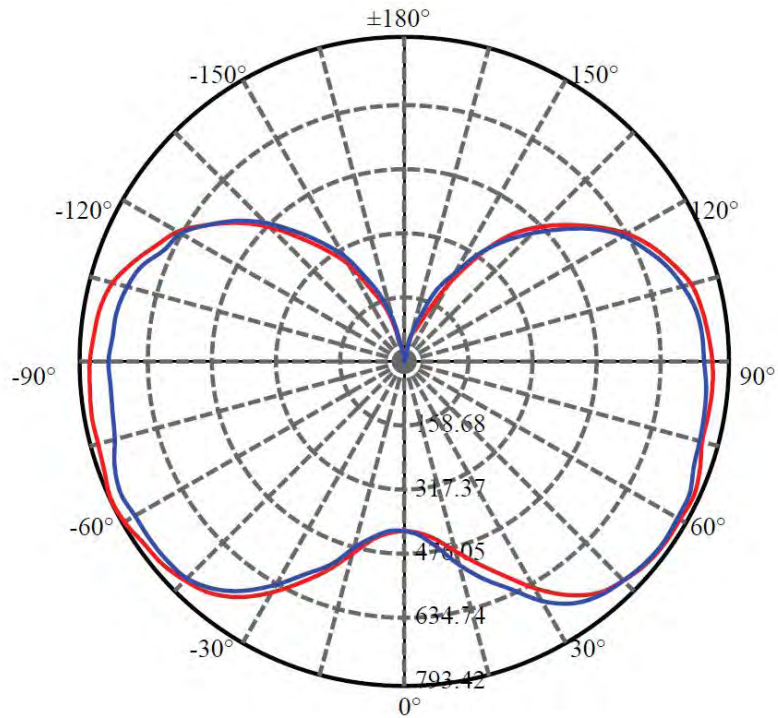

C0/C180: ———

C90/C270: ———

Field angle(10%Imax):C0/180Left:165.0 Right:161.8
:C90/270Left:167.0 Right:163.9

Beam Angle(50%Imax):C0/180Left:140.3 Right:140.5
:C90/270Left:142.5 Right:139.5

**Luminous Intensity Distribution Data**

$C/\gamma(^{\circ})$	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0
0.0	415.09	419.46	438.82	480.42	527.57	580.70	642.07	698.08	740.91
22.5	415.09	420.70	448.29	491.54	543.43	596.56	658.54	711.46	746.68
45.0	415.09	417.41	447.68	492.57	545.90	599.44	655.86	707.34	743.79
67.5	415.09	421.94	451.79	502.25	556.20	608.91	675.22	724.23	761.30
90.0	415.09	427.91	462.30	514.60	562.37	613.44	674.81	724.23	747.29
112.5	415.09	428.73	457.56	503.89	551.26	609.12	658.33	701.37	733.91
135.0	415.09	427.91	454.27	502.45	557.02	606.65	665.13	711.05	732.88
157.5	415.09	425.44	452.41	498.33	547.75	594.70	656.28	710.43	736.79
180.0	415.09	421.32	443.15	485.57	540.55	597.59	654.63	702.81	736.17
202.5	415.09	414.73	440.47	482.68	536.02	591.82	644.74	696.84	730.00
225.0	415.09	416.99	438.62	476.30	530.66	581.11	634.24	682.43	716.40
247.5	415.09	419.26	433.88	474.24	525.93	580.50	636.10	688.19	721.76
270.0	415.09	417.41	435.73	471.15	524.49	572.05	631.56	686.13	723.82
292.5	415.09	416.79	435.73	472.59	515.63	568.96	627.24	677.69	725.67
315.0	415.09	419.88	434.09	474.24	528.60	581.11	638.36	699.11	738.44
337.5	415.09	417.61	438.00	475.06	523.25	574.52	636.71	692.11	738.23
360.0	415.09	419.46	438.82	480.42	527.57	580.70	642.07	698.08	740.91
$C/\gamma(^{\circ})$	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0
0.0	760.47	773.45	775.30	774.89	779.83	769.33	754.91	756.35	756.77
22.5	765.21	770.77	767.68	764.80	756.35	733.91	725.88	720.94	716.20
45.0	763.15	768.92	766.86	768.71	765.83	748.32	742.35	739.26	737.61
67.5	771.59	771.39	770.36	773.45	768.30	756.97	749.15	745.44	745.03
90.0	757.18	767.27	772.62	771.39	768.09	751.41	746.26	743.79	739.06
112.5	754.71	767.06	779.21	787.86	792.39	776.12	767.06	769.53	763.77
135.0	751.41	765.00	774.06	775.50	768.71	754.09	751.62	747.71	745.85
157.5	754.71	761.09	760.88	770.77	770.15	756.15	752.85	751.00	750.18
180.0	759.03	771.80	776.74	786.83	789.10	782.09	773.03	772.83	772.62
202.5	747.29	758.82	758.41	762.53	765.21	753.88	739.26	739.06	735.56
225.0	740.09	758.00	774.27	786.62	793.42	785.80	771.59	768.71	770.15
247.5	741.32	753.06	767.06	770.97	773.03	761.50	741.73	741.32	737.82
270.0	748.53	758.41	756.97	757.80	763.15	752.24	731.44	725.05	720.94
292.5	752.24	762.74	765.41	768.50	772.00	770.77	759.44	755.53	752.03
315.0	756.35	763.77	760.47	763.77	764.80	755.12	732.47	731.85	724.64
337.5	760.06	768.92	772.42	768.09	764.80	751.21	730.00	729.17	722.99
360.0	760.47	773.45	775.30	774.89	779.83	769.33	754.91	756.35	756.77
$C/\gamma(^{\circ})$	90.0	95.0	100.0	105.0	110.0	115.0	120.0	125.0	130.0
0.0	753.88	745.23	739.26	724.85	697.87	665.75	625.59	575.97	520.16
22.5	714.96	707.76	703.64	692.31	672.13	636.30	607.88	562.79	512.54
45.0	732.06	726.08	720.11	700.34	675.22	633.83	600.47	545.28	493.39
67.5	740.91	733.29	727.11	713.73	689.84	655.86	613.86	563.20	505.33
90.0	734.11	729.38	722.58	708.17	680.57	650.92	611.80	565.05	505.75
112.5	761.09	752.85	745.03	724.02	693.96	652.16	609.94	556.40	497.92
135.0	744.00	740.29	728.35	711.87	684.49	649.48	612.41	562.99	499.57
157.5	747.09	744.82	739.88	725.88	698.90	669.04	631.15	581.94	523.66
180.0	768.50	760.88	754.29	738.03	705.29	670.69	635.68	583.17	526.34
202.5	734.73	730.20	726.70	712.29	686.96	657.31	630.74	590.59	530.66
225.0	765.21	763.36	757.38	743.17	716.61	685.52	643.30	591.62	537.46
247.5	736.38	734.53	726.29	716.61	691.08	664.92	634.24	590.17	532.10
270.0	721.14	713.52	710.85	702.61	680.37	648.86	631.36	583.58	535.40
292.5	755.74	745.44	744.62	730.00	705.29	680.99	636.30	587.70	533.55
315.0	727.32	717.02	715.17	707.34	684.69	651.75	635.89	589.56	538.08
337.5	720.94	713.11	710.23	694.99	672.34	644.13	613.86	568.35	515.22
360.0	753.88	745.23	739.26	724.85	697.87	665.75	625.59	575.97	520.16



C/γ(°)	135.0	140.0	145.0	150.0	155.0	160.0	165.0	170.0	175.0
0.0	465.59	401.96	322.48	223.01	140.85	88.55	62.19	21.62	5.77
22.5	444.59	389.19	332.57	268.73	191.51	120.88	66.31	22.24	3.91
45.0	430.58	369.84	310.33	249.78	181.21	119.23	63.63	18.12	2.06
67.5	440.88	382.81	320.83	256.99	191.30	125.20	61.98	14.42	1.65
90.0	441.70	380.75	319.39	259.46	193.57	127.26	63.42	14.62	2.06
112.5	431.82	367.37	307.85	242.17	178.74	119.02	61.78	14.21	2.27
135.0	436.56	379.31	318.56	256.79	194.19	128.70	66.10	18.95	2.88
157.5	461.27	395.58	333.18	267.08	199.33	130.97	67.95	24.71	4.74
180.0	461.27	398.67	335.24	272.23	203.45	137.97	78.66	32.54	6.38
202.5	467.24	405.87	347.80	285.20	220.96	154.03	85.87	38.30	8.44
225.0	472.18	409.58	346.16	282.32	216.63	148.68	90.19	41.39	10.71
247.5	471.36	410.20	353.36	290.76	228.16	162.68	99.87	46.13	12.36
270.0	476.30	414.11	359.13	296.32	231.05	165.97	99.26	44.89	11.94
292.5	480.62	410.82	337.92	268.32	205.51	142.29	88.55	40.77	11.94
315.0	476.71	414.93	358.72	296.53	215.81	153.21	81.55	37.07	10.50
337.5	457.15	388.37	313.41	236.81	172.15	106.87	54.78	26.98	8.44
360.0	465.59	401.96	322.48	223.01	140.85	88.55	62.19	21.62	5.77
C/γ(°)	180.0								
0.0	0.98								
22.5	0.98								
45.0	0.98								
67.5	0.98								
90.0	0.98								
112.5	0.98								
135.0	0.98								
157.5	0.98								
180.0	0.98								
202.5	0.98								
225.0	0.98								
247.5	0.98								
270.0	0.98								
292.5	0.98								
315.0	0.98								
337.5	0.98								
360.0	0.98								

**3.2.2 Model Number: HIDFA-63S-EX39-8CCT-BYP/3SP, 3000K at 277V****Electrical data**

Input Voltage(V)	Frequency (Hz)	Input Current (A)	Power (W)	Power Factor
277.100	60	0.250	62.628	0.903

Photometric data

Luminous Flux (lm)	Efficacy (lm/W)	Zonal Lumen in 0-60°(%lm)	Zonal Lumen in 0-90°(%lm)
8162.68	130.34	27.33	57.13



Zonal Flux Diagram



Zonal flux distribution table

$\gamma(^{\circ})$	Average I(cd)	Zonal F(lm)	Sum F(lm)	Eff Flux(%)	Eff Sum(%)
0.0	429.542	0.000	0	0.00%	0.00%
5.0	435.449	10.341	10.341	0.00%	0.13%
10.0	459.838	32.027	42.368	0.00%	0.52%
15.0	504.034	57.176	99.544	0.00%	1.22%
20.0	555.631	87.331	186.875	0.00%	2.29%
25.0	609.788	122.231	309.106	0.00%	3.79%
30.0	670.728	162.050	471.157	0.00%	5.77%
35.0	722.260	205.127	676.284	0.00%	8.29%
40.0	757.344	246.861	923.145	0.00%	11.31%
45.0	775.620	283.841	1206.986	0.00%	14.79%
50.0	785.350	315.417	1522.402	0.00%	18.65%
55.0	789.713	342.471	1864.874	0.00%	22.85%
60.0	793.703	366.002	2230.876	0.00%	27.33%
65.0	793.420	385.832	2616.708	0.00%	32.06%
70.0	780.588	398.549	3015.257	0.00%	36.94%
75.0	768.786	404.981	3420.238	0.00%	41.90%
80.0	765.568	410.551	3830.789	0.00%	46.93%
85.0	762.480	415.207	4245.996	0.00%	52.02%
90.0	761.180	417.190	4663.186	0.00%	57.13%
95.0	755.208	415.199	5078.385	0.00%	62.21%
100.0	749.352	408.825	5487.21	0.00%	67.22%
105.0	733.921	396.882	5884.092	0.00%	72.09%
110.0	708.528	377.033	6261.125	0.00%	76.70%
115.0	675.374	350.413	6611.538	0.00%	81.00%
120.0	640.187	319.815	6931.353	0.00%	84.92%
125.0	590.599	284.493	7215.846	0.00%	88.40%
130.0	533.880	244.499	7460.345	0.00%	91.40%
135.0	469.349	202.717	7663.062	0.00%	93.88%
140.0	406.259	162.126	7825.188	0.00%	95.87%
145.0	342.810	124.976	7950.165	0.00%	97.40%
150.0	274.340	90.880	8041.044	0.00%	98.51%
155.0	203.258	60.441	8101.485	0.00%	99.25%
160.0	137.222	35.710	8137.195	0.00%	99.69%
165.0	77.144	17.667	8154.862	0.00%	99.90%
170.0	30.271	6.372	8161.233	0.00%	99.98%
175.0	7.336	1.345	8162.579	0.00%	100.00%
180.0	1.103	0.101	8162.68	0.00%	100.00%



Luminous Intensity Distribution Diagram

Light Distribution Curve [Unit:cd]

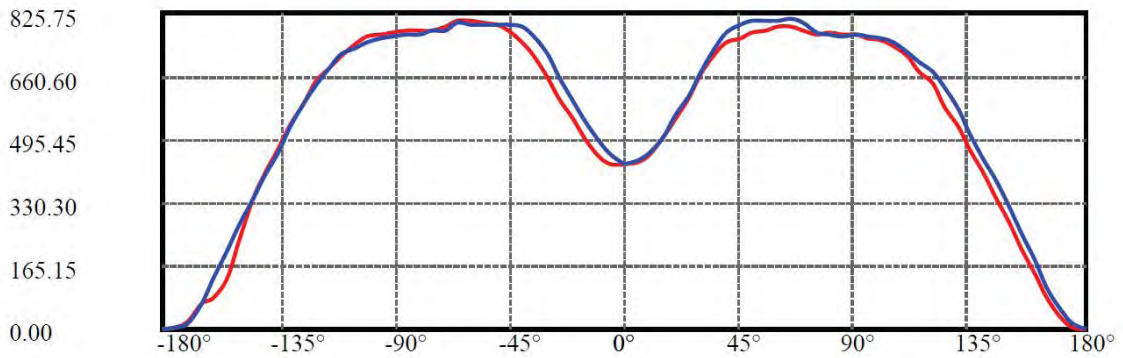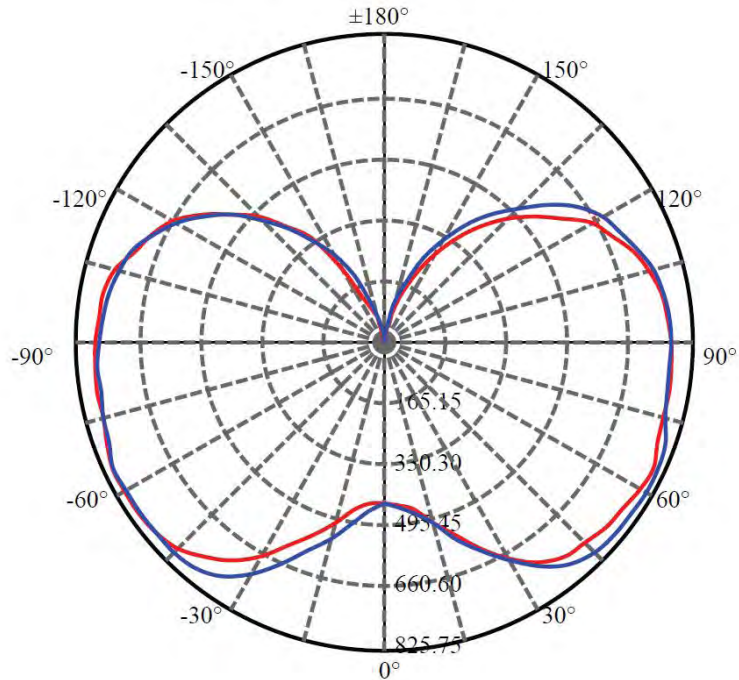

C0/C180: —

C90/C270: —

Field angle(10%Imax):C0/180Left:160.4 Right:165.0

:C90/270Left:163.9 Right:167.4

Beam Angle(50%Imax):C0/180Left:140.3 Right:140.1

:C90/270Left:139.8 Right:143.6

**Luminous Intensity Distribution Data**

C/γ(°)	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0
0.0	429.54	436.14	456.53	501.22	550.84	607.68	666.98	716.40	751.00
22.5	429.54	433.06	452.41	490.51	543.22	599.65	655.04	709.40	742.15
45.0	429.54	424.61	446.85	485.15	538.28	587.70	644.33	686.13	724.85
67.5	429.54	423.17	441.09	482.48	527.37	579.67	640.42	693.75	727.11
90.0	429.54	443.35	463.53	502.86	558.05	612.41	672.96	734.32	772.42
112.5	429.54	437.17	453.65	494.63	546.31	602.53	665.95	717.23	765.62
135.0	429.54	438.62	453.03	495.24	550.43	605.41	666.57	727.94	763.56
157.5	429.54	433.88	455.30	493.39	545.08	596.35	663.48	720.52	765.83
180.0	429.54	430.38	453.24	498.95	547.14	598.21	658.95	711.46	750.79
202.5	429.54	429.97	460.44	502.04	558.87	609.53	671.31	722.79	764.18
225.0	429.54	428.73	456.94	503.07	554.34	607.47	663.89	714.14	756.56
247.5	429.54	433.47	461.06	508.01	558.26	612.83	678.10	730.20	767.68
270.0	429.54	454.06	491.54	542.61	593.68	654.22	717.43	764.80	787.45
292.5	429.54	443.35	475.48	524.69	576.79	635.27	690.46	732.88	761.50
315.0	429.54	440.88	471.36	526.96	577.41	630.33	695.61	742.15	760.88
337.5	429.54	436.35	464.97	512.75	564.02	617.36	680.16	732.06	755.94
360.0	429.54	436.14	456.53	501.22	550.84	607.68	666.98	716.40	751.00
C/γ(°)	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0
0.0	761.09	773.03	778.18	789.51	792.39	779.21	770.56	772.00	768.92
22.5	755.12	760.68	766.24	775.30	777.15	763.77	746.68	745.65	742.56
45.0	745.23	756.15	766.24	774.27	781.06	778.80	769.33	763.77	761.30
67.5	746.06	755.94	764.18	770.15	773.24	764.38	744.00	742.56	736.38
90.0	795.69	804.33	805.57	807.42	808.25	800.63	776.95	769.94	765.21
112.5	791.36	803.92	815.45	825.75	823.90	818.34	803.10	795.48	791.57
135.0	783.74	795.07	794.04	794.66	793.42	781.27	761.71	761.50	756.35
157.5	787.86	802.89	811.13	799.80	794.66	783.54	760.47	753.68	752.24
180.0	778.18	795.89	801.04	803.30	803.30	791.98	777.36	778.18	777.77
202.5	787.45	799.39	794.86	786.83	779.62	756.35	748.94	746.88	742.76
225.0	781.89	791.98	783.74	783.95	786.42	769.94	758.62	759.03	755.74
247.5	782.92	787.65	791.36	793.83	790.74	774.27	768.92	768.50	764.59
270.0	793.42	794.66	796.30	796.92	801.04	782.09	777.98	771.18	769.53
292.5	776.12	788.27	803.30	819.98	814.22	797.95	793.21	790.13	789.10
315.0	774.06	781.48	785.39	788.89	786.21	773.03	774.89	768.71	766.86
337.5	769.74	774.27	778.39	788.68	789.10	773.86	767.89	761.91	758.82
360.0	761.09	773.03	778.18	789.51	792.39	779.21	770.56	772.00	768.92
C/γ(°)	90.0	95.0	100.0	105.0	110.0	115.0	120.0	125.0	130.0
0.0	767.68	761.09	755.12	736.17	711.46	671.72	639.60	579.47	527.37
22.5	742.56	733.50	728.55	718.88	698.90	662.04	634.45	587.29	536.63
45.0	761.30	757.18	750.79	732.47	708.99	671.31	637.33	583.17	525.10
67.5	740.29	734.11	728.97	717.64	695.81	667.40	635.27	595.32	539.93
90.0	767.47	762.94	760.88	748.32	722.58	697.87	671.72	631.15	575.14
112.5	792.39	786.62	781.48	768.09	737.00	713.93	670.07	613.65	563.40
135.0	754.09	750.59	747.91	733.29	708.79	683.87	663.28	615.50	561.55
157.5	750.18	743.17	739.26	724.23	697.25	673.57	640.83	597.18	540.96
180.0	772.62	767.27	762.94	744.82	713.52	682.63	647.21	591.82	532.52
202.5	740.70	735.14	731.64	716.20	691.28	661.01	628.06	590.38	529.63
225.0	754.09	746.88	738.44	719.91	690.87	654.42	616.33	563.61	507.39
247.5	762.33	755.74	748.73	731.85	702.40	665.95	626.42	575.76	513.98
270.0	764.59	756.97	749.56	735.97	716.20	680.37	636.92	588.73	529.43
292.5	786.21	779.21	770.36	746.68	719.29	672.75	634.45	576.17	517.69
315.0	764.18	757.59	747.71	733.29	710.85	672.13	625.18	577.00	515.63
337.5	758.21	755.32	747.29	734.94	711.26	675.01	635.89	583.38	525.72
360.0	767.68	761.09	755.12	736.17	711.46	671.72	639.60	579.47	527.37



<i>C/γ(°)</i>	135.0	140.0	145.0	150.0	155.0	160.0	165.0	170.0	175.0
0.0	468.47	402.99	341.42	275.52	208.60	141.47	80.72	32.74	6.80
22.5	466.62	411.85	350.48	288.91	220.75	155.68	86.08	36.86	8.24
45.0	467.65	405.67	341.83	276.76	214.16	150.32	90.81	40.36	10.09
67.5	475.89	417.61	357.07	299.00	233.72	167.83	99.87	46.33	11.33
90.0	505.75	443.35	388.37	318.56	250.81	177.92	108.93	51.28	13.80
112.5	500.60	428.11	352.75	288.09	217.45	149.71	92.67	44.07	13.18
135.0	494.42	430.17	369.84	306.83	228.99	161.03	89.78	43.24	12.77
157.5	475.89	412.05	338.54	258.23	184.92	108.93	53.95	30.68	10.30
180.0	473.42	406.08	338.54	229.60	133.03	81.55	64.66	22.24	7.41
202.5	464.15	400.73	339.98	278.20	195.42	129.11	68.37	24.71	5.35
225.0	442.12	379.10	320.00	253.70	186.36	124.58	67.75	18.33	3.30
247.5	448.71	384.25	322.48	257.40	193.36	128.70	64.45	18.74	1.44
270.0	462.30	401.14	336.48	272.64	203.25	133.85	66.31	13.80	3.09
292.5	451.79	386.52	322.06	253.29	184.51	122.11	63.84	15.44	2.27
315.0	450.97	391.46	330.71	267.08	199.54	131.58	67.95	20.39	3.50
337.5	460.86	399.08	334.42	265.64	197.27	131.17	68.16	25.12	4.53
360.0	468.47	402.99	341.42	275.52	208.60	141.47	80.72	32.74	6.80
<i>C/γ(°)</i>	180.0								
0.0	1.10								
22.5	1.10								
45.0	1.10								
67.5	1.10								
90.0	1.10								
112.5	1.10								
135.0	1.10								
157.5	1.10								
180.0	1.10								
202.5	1.10								
225.0	1.10								
247.5	1.10								
270.0	1.10								
292.5	1.10								
315.0	1.10								
337.5	1.10								
360.0	1.10								

**3.2.3 Model Number: HIDFA-63S-EX39-8CCT-BYP/3SP, 4000K at 120V****Electrical data**

Input Voltage(V)	Frequency (Hz)	Input Current (A)	Power (W)	Power Factor
120.040	60	0.508	60.220	0.988

Photometric data

Luminous Flux (lm)	Efficacy (lm/W)	Zonal Lumen in 0-60°(%lm)	Zonal Lumen in 0-90°(%lm)
8719.29	144.79	26.46	56.14



Zonal Flux Diagram



Zonal flux distribution table

$\gamma(^{\circ})$	Average I(cd)	Zonal F(lm)	Sum F(lm)	Eff Flux(%)	Eff Sum(%)
0.0	440.584	0.000	0	0.00%	0.00%
5.0	446.519	10.605	10.605	0.00%	0.12%
10.0	471.913	32.855	43.46	0.00%	0.50%
15.0	516.148	58.611	102.071	0.00%	1.17%
20.0	572.708	89.737	191.808	0.00%	2.20%
25.0	632.923	126.448	318.257	0.00%	3.65%
30.0	693.188	167.820	486.077	0.00%	5.57%
35.0	746.043	211.937	698.014	0.00%	8.01%
40.0	782.275	254.988	953.002	0.00%	10.93%
45.0	801.128	293.180	1246.182	0.00%	14.29%
50.0	811.727	325.901	1572.083	0.00%	18.03%
55.0	818.432	354.451	1926.534	0.00%	22.10%
60.0	828.703	380.730	2307.265	0.00%	26.46%
65.0	836.441	404.799	2712.064	0.00%	31.10%
70.0	830.694	422.129	3134.193	0.00%	35.95%
75.0	822.615	432.148	3566.342	0.00%	40.90%
80.0	818.331	439.071	4005.413	0.00%	45.94%
85.0	814.285	443.621	4449.034	0.00%	51.03%
90.0	815.886	446.354	4895.388	0.00%	56.14%
95.0	813.315	446.088	5341.476	0.00%	61.26%
100.0	803.510	439.330	5780.806	0.00%	66.30%
105.0	788.312	425.927	6206.733	0.00%	71.18%
110.0	764.153	405.789	6612.522	0.00%	75.84%
115.0	734.121	379.372	6991.895	0.00%	80.19%
120.0	694.423	347.282	7339.176	0.00%	84.17%
125.0	646.231	309.888	7649.065	0.00%	87.73%
130.0	590.730	268.956	7918.021	0.00%	90.81%
135.0	527.087	225.871	8143.892	0.00%	93.40%
140.0	460.332	182.829	8326.721	0.00%	95.50%
145.0	392.505	142.289	8469.01	0.00%	97.13%
150.0	318.503	104.701	8573.711	0.00%	98.33%
155.0	241.111	70.820	8644.531	0.00%	99.14%
160.0	165.345	42.630	8687.16	0.00%	99.63%
165.0	97.380	21.652	8708.813	0.00%	99.88%
170.0	43.340	8.347	8717.16	0.00%	99.98%
175.0	11.834	1.974	8719.134	0.00%	100.00%
180.0	1.311	0.157	8719.291	0.00%	100.00%



Luminous Intensity Distribution Diagram

Light Distribution Curve [Unit:cd]

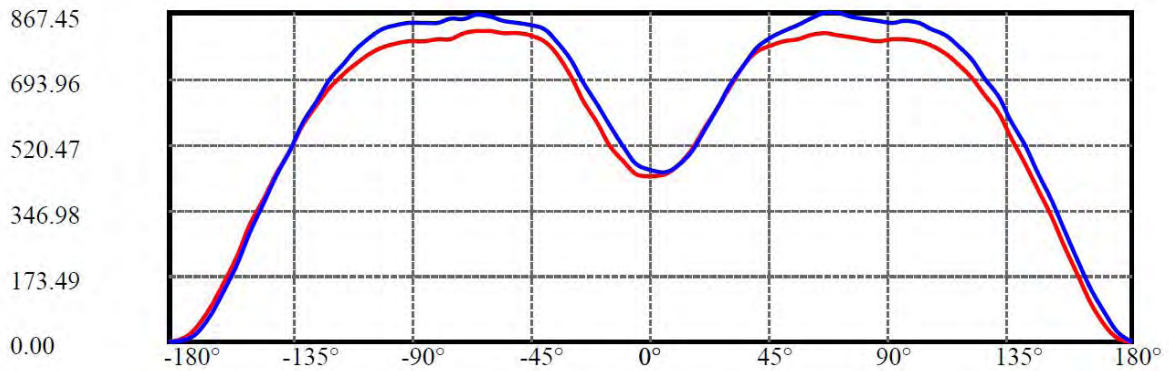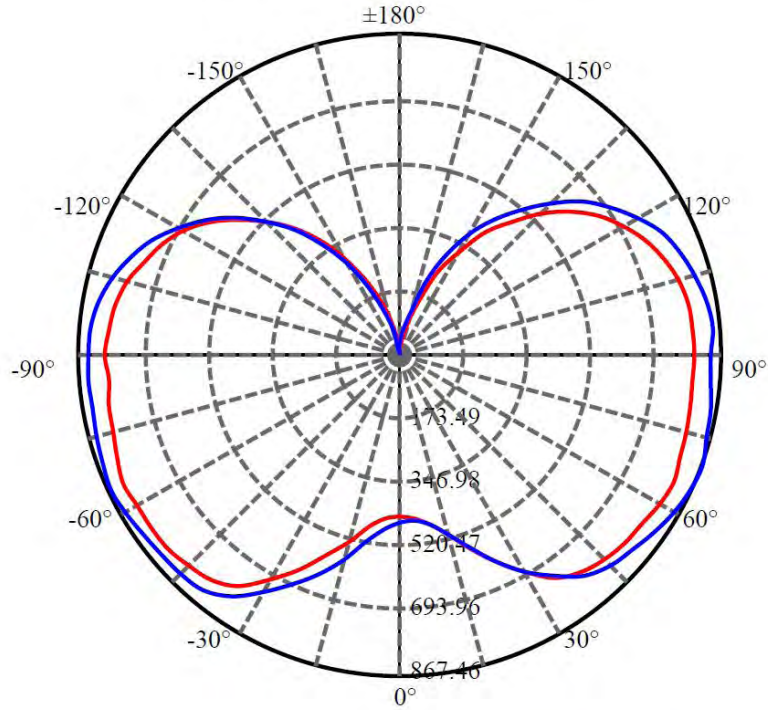

C0/C180: ———

C90/C270: ———

Field angle(10%Imax):C0/180Left:165.7 Right:166.6

:C90/270Left:163.6 Right:169.0

Beam Angle(50%Imax):C0/180Left:142.6 Right:144.5

:C90/270Left:140.2 Right:145.9

**Luminous Intensity Distribution Data**

$C/\gamma(^{\circ})$	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0
0.0	435.34	442.60	464.78	505.51	558.54	618.03	676.10	733.37	767.44
22.5	436.95	438.97	460.75	498.45	549.67	604.32	667.23	722.88	763.21
45.0	433.73	436.35	452.68	489.78	543.22	604.92	661.58	717.64	755.95
67.5	434.13	432.32	448.85	486.56	535.15	589.60	643.84	697.27	738.20
90.0	452.08	449.86	464.78	502.69	554.11	618.23	677.91	731.35	775.71
112.5	447.64	448.85	465.39	502.29	559.15	620.85	682.35	736.39	782.16
135.0	444.01	448.04	463.57	505.11	562.58	621.05	681.95	737.80	781.56
157.5	440.79	444.21	468.81	518.42	577.70	640.41	703.52	758.37	798.09
180.0	435.34	442.80	473.85	519.43	575.08	637.38	701.91	759.58	794.06
202.5	436.95	444.62	475.67	524.26	579.31	640.81	697.07	749.90	784.38
225.0	433.73	445.02	473.65	520.84	584.76	646.26	711.99	762.20	792.65
247.5	434.13	441.19	473.45	519.43	577.70	639.20	703.72	758.17	792.45
270.0	452.08	469.02	509.75	569.43	627.50	683.76	742.04	794.66	825.92
292.5	447.64	460.55	499.46	550.88	615.81	678.12	739.01	784.18	811.20
315.0	444.01	451.88	482.73	529.31	587.38	647.06	704.33	747.68	777.52
337.5	440.79	448.04	472.44	516.00	575.68	636.78	696.47	745.26	775.91
360.0	435.34	442.60	464.78	505.51	558.54	618.03	676.10	733.37	767.44
$C/\gamma(^{\circ})$	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0
0.0	781.96	790.63	795.67	807.37	814.83	807.37	802.12	797.49	792.45
22.5	787.20	799.50	806.16	816.64	826.93	828.74	824.51	823.09	817.65
45.0	780.15	792.45	800.11	812.61	822.49	814.42	804.14	801.32	792.24
67.5	765.22	778.94	791.84	808.58	820.88	820.07	810.79	810.39	803.94
90.0	803.54	819.67	836.00	853.14	866.45	867.46	855.16	851.32	845.48
112.5	807.37	822.89	826.93	831.97	841.24	841.04	826.72	822.29	810.79
135.0	813.42	830.76	839.43	846.28	851.73	856.57	848.50	843.46	837.81
157.5	815.43	824.10	826.72	835.40	839.83	832.37	817.65	813.21	805.96
180.0	806.96	815.23	815.23	819.06	820.88	812.00	798.49	796.08	790.03
202.5	803.13	811.60	821.68	836.00	840.03	836.81	829.75	826.32	826.32
225.0	804.54	812.21	815.63	822.69	826.12	808.78	802.53	795.47	795.27
247.5	810.79	816.64	822.89	830.76	841.24	831.36	826.52	822.49	822.49
270.0	837.21	840.03	844.87	854.95	861.61	850.52	848.90	840.23	842.05
292.5	818.46	824.30	824.51	830.35	838.42	822.49	815.43	810.39	810.79
315.0	789.42	806.76	817.85	834.59	844.67	840.84	836.81	831.77	833.38
337.5	793.25	801.92	809.38	818.86	825.72	820.27	813.82	807.97	801.92
360.0	781.96	790.63	795.67	807.37	814.83	807.37	802.12	797.49	792.45
$C/\gamma(^{\circ})$	90.0	95.0	100.0	105.0	110.0	115.0	120.0	125.0	130.0
0.0	796.28	795.87	791.44	779.54	758.17	731.55	697.47	654.12	601.29
22.5	820.27	818.66	813.01	797.69	774.50	745.26	703.72	658.36	604.11
45.0	794.26	794.87	790.83	777.93	757.16	734.17	699.49	659.36	611.78
67.5	807.17	809.59	802.93	787.00	764.62	735.18	695.46	648.68	594.44
90.0	842.25	845.88	839.43	825.92	807.77	781.15	741.83	695.86	644.64
112.5	811.60	811.80	804.54	794.87	777.32	752.72	720.86	678.72	625.49
135.0	840.03	836.81	828.94	811.20	789.42	758.57	713.81	660.77	606.94
157.5	808.78	806.36	793.86	784.78	764.01	739.21	702.11	654.32	597.86
180.0	793.66	786.80	777.32	759.18	734.98	707.96	670.66	623.47	569.43
202.5	829.35	822.09	809.38	789.22	762.00	728.12	682.96	628.92	569.63
225.0	796.08	791.64	778.33	761.80	738.20	707.96	671.26	624.08	563.99
247.5	823.09	815.63	798.09	783.78	752.52	717.23	671.86	617.22	557.33
270.0	841.24	836.40	822.09	803.13	771.68	734.98	688.00	633.96	574.47
292.5	812.21	808.98	796.48	779.54	751.51	722.07	682.75	633.75	574.88
315.0	833.78	830.76	817.85	799.91	769.86	730.95	683.16	631.34	574.07
337.5	804.14	800.91	791.64	777.52	752.72	718.85	685.37	636.78	581.33
360.0	796.28	795.87	791.44	779.54	758.17	731.55	697.47	654.12	601.29



C/γ(°)	135.0	140.0	145.0	150.0	155.0	160.0	165.0	170.0	175.0
0.0	538.38	469.82	404.09	326.05	251.85	171.60	101.22	40.53	13.31
22.5	543.62	473.85	406.51	334.12	259.11	187.73	116.75	55.25	16.13
45.0	550.28	485.35	420.62	349.04	271.41	190.35	117.35	56.66	17.34
67.5	533.74	467.20	401.67	329.88	258.91	181.07	114.53	54.44	16.74
90.0	581.93	514.99	447.44	373.64	293.99	211.12	139.54	73.60	27.83
112.5	564.59	501.48	434.53	365.37	287.14	203.46	131.27	67.55	24.00
135.0	544.63	474.66	403.68	329.88	255.08	178.25	111.51	56.66	18.95
157.5	534.14	471.43	407.11	332.30	248.82	170.99	101.43	45.37	13.71
180.0	506.52	444.21	379.49	305.49	225.84	152.64	89.53	38.92	9.07
202.5	503.09	434.13	360.13	285.52	213.34	138.93	71.99	26.42	5.24
225.0	499.46	435.34	370.01	296.21	212.93	140.34	75.82	26.21	2.82
247.5	492.41	423.04	352.06	278.67	203.25	130.46	60.49	20.77	4.44
270.0	505.31	436.75	365.37	286.13	204.46	131.07	68.76	24.20	3.63
292.5	510.96	443.61	372.23	292.38	213.74	142.16	75.41	29.04	2.42
315.0	508.74	438.37	367.79	294.19	221.00	149.01	84.69	34.08	3.63
337.5	515.59	451.07	387.35	317.18	236.93	166.35	97.80	43.76	10.08
360.0	538.38	469.82	404.09	326.05	251.85	171.60	101.22	40.53	13.31
C/γ(°)	180.0								
0.0	1.21								
22.5	1.21								
45.0	1.01								
67.5	1.01								
90.0	2.02								
112.5	1.41								
135.0	1.41								
157.5	1.21								
180.0	1.21								
202.5	1.21								
225.0	1.01								
247.5	1.01								
270.0	2.02								
292.5	1.41								
315.0	1.41								
337.5	1.21								
360.0	1.21								

**3.2.4 Model Number: HIDFA-63S-EX39-8CCT-BYP/3SP, 4000K at 277V****Electrical data**

Input Voltage(V)	Frequency (Hz)	Input Current (A)	Power (W)	Power Factor
277.210	60	0.247	61.550	0.900

Photometric data

Luminous Flux (lm)	Efficacy (lm/W)	Zonal Lumen in 0-60°(%lm)	Zonal Lumen in 0-90°(%lm)
9012.57	146.43	26.45	56.14



Zonal Flux Diagram



Zonal flux distribution table

$\gamma(^{\circ})$	Average I(cd)	Zonal F(lm)	Sum F(lm)	Eff Flux(%)	Eff Sum(%)
0.0	452.329	0.000	0	0.00%	0.00%
5.0	459.805	10.904	10.904	0.00%	0.12%
10.0	487.273	33.880	44.784	0.00%	0.50%
15.0	534.271	60.597	105.382	0.00%	1.17%
20.0	592.886	92.894	198.275	0.00%	2.20%
25.0	654.664	130.845	329.12	0.00%	3.65%
30.0	716.110	173.473	502.593	0.00%	5.58%
35.0	770.332	218.889	721.482	0.00%	8.01%
40.0	806.679	263.112	984.594	0.00%	10.92%
45.0	827.439	302.570	1287.164	0.00%	14.28%
50.0	838.355	336.598	1623.763	0.00%	18.02%
55.0	846.916	366.434	1990.197	0.00%	22.08%
60.0	857.356	393.937	2384.134	0.00%	26.45%
65.0	864.964	418.699	2802.833	0.00%	31.10%
70.0	858.096	436.290	3239.123	0.00%	35.94%
75.0	850.608	446.628	3685.751	0.00%	40.90%
80.0	845.566	453.849	4139.599	0.00%	45.93%
85.0	841.703	458.471	4598.071	0.00%	51.02%
90.0	843.502	461.422	5059.493	0.00%	56.14%
95.0	840.882	461.198	5520.691	0.00%	61.26%
100.0	831.025	454.297	5974.988	0.00%	66.30%
105.0	814.393	440.268	6415.256	0.00%	71.18%
110.0	790.246	419.427	6834.683	0.00%	75.83%
115.0	759.469	392.398	7227.081	0.00%	80.19%
120.0	718.134	359.208	7586.289	0.00%	84.17%
125.0	668.649	320.551	7906.84	0.00%	87.73%
130.0	610.153	278.054	8184.894	0.00%	90.82%
135.0	545.200	233.456	8418.35	0.00%	93.41%
140.0	476.026	189.088	8607.439	0.00%	95.50%
145.0	404.233	146.865	8754.303	0.00%	97.13%
150.0	328.721	107.933	8862.236	0.00%	98.33%
155.0	248.817	73.088	8935.324	0.00%	99.14%
160.0	170.341	43.962	8979.286	0.00%	99.63%
165.0	100.612	22.330	9001.616	0.00%	99.88%
170.0	45.900	8.691	9010.307	0.00%	99.97%
175.0	12.729	2.097	9012.404	0.00%	100.00%
180.0	1.376	0.169	9012.573	0.00%	100.00%



Luminous Intensity Distribution Diagram

Light Distribution Curve [Unit:cd]

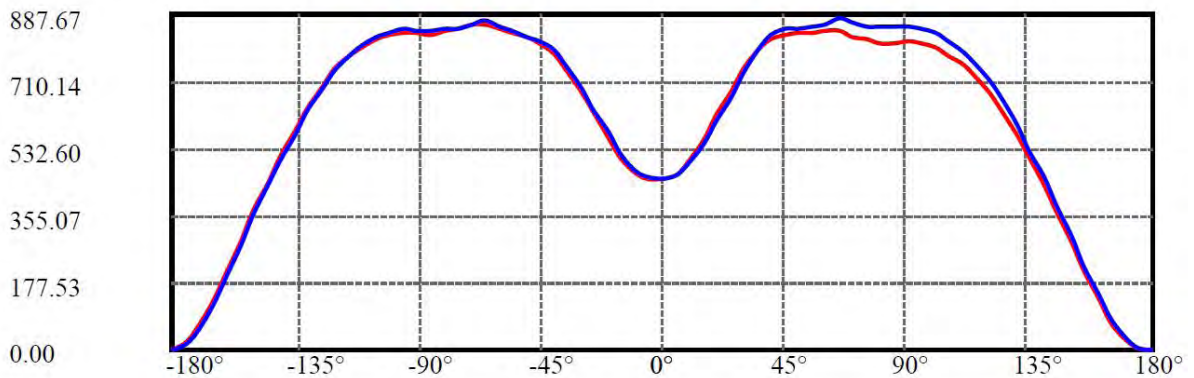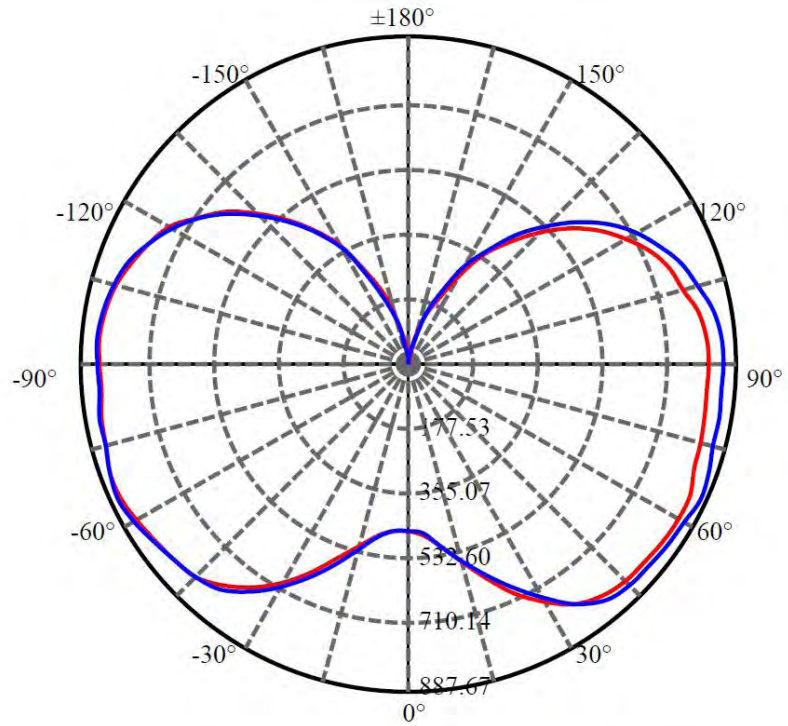

C0/C180: ——

C90/C270: ——

Field angle(10%Imax):C0/180Left:168.5 Right:163.9

:C90/270Left:167.5 Right:164.8

Beam Angle(50%Imax):C0/180Left:145.8 Right:140.5

:C90/270Left:144.7 Right:141.2

**Luminous Intensity Distribution Data**

C/ γ (°)	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0
0.0	452.20	465.32	501.74	558.68	622.41	685.49	744.13	793.04	819.92
22.5	449.87	469.77	512.96	571.60	632.14	691.63	747.10	793.25	821.62
45.0	455.58	474.64	519.31	576.04	642.09	703.28	762.98	807.86	827.12
67.5	458.34	476.33	518.46	577.10	632.14	693.75	749.85	801.72	827.97
90.0	453.47	462.36	498.35	548.10	606.32	666.86	733.55	791.34	834.11
112.5	449.02	457.28	490.09	539.84	599.54	661.36	724.02	785.42	820.56
135.0	450.50	455.80	481.84	527.99	583.24	642.94	704.12	752.81	795.37
157.5	449.66	453.47	473.58	516.55	574.56	638.71	700.74	755.14	795.37
180.0	452.20	451.56	469.56	507.03	560.17	626.43	684.65	740.11	785.21
202.5	449.87	452.62	465.53	502.79	556.35	615.42	681.26	740.75	789.23
225.0	455.58	453.89	463.42	500.04	554.24	623.46	682.32	743.08	783.09
247.5	458.34	455.37	466.80	500.04	553.18	611.61	672.79	728.68	773.98
270.0	453.47	456.22	475.06	520.15	576.68	633.20	695.65	751.97	794.10
292.5	449.02	454.31	478.87	520.37	580.07	641.25	705.60	763.61	798.54
315.0	450.50	458.55	484.38	532.64	592.98	655.64	722.54	780.34	817.60
337.5	449.66	459.39	496.44	549.37	620.08	683.59	746.46	796.21	823.10
360.0	452.20	465.32	501.74	558.68	622.41	685.49	744.13	793.04	819.92
C/ γ (°)	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0
0.0	832.20	836.86	839.40	843.00	844.06	825.22	820.77	813.15	812.30
22.5	840.25	845.33	858.67	872.85	873.91	865.44	861.63	854.43	858.45
45.0	838.98	846.81	846.60	852.74	849.56	832.20	825.64	816.33	818.44
67.5	840.46	841.94	847.45	856.76	861.42	848.29	847.23	838.77	839.61
90.0	848.72	850.62	856.13	861.84	874.54	866.29	856.97	854.01	852.74
112.5	832.63	838.55	840.25	847.02	855.07	844.48	836.65	831.36	830.09
135.0	820.77	837.50	851.04	870.52	887.25	882.59	878.99	873.70	871.58
157.5	820.56	836.01	843.85	854.64	864.81	860.78	852.74	847.66	838.98
180.0	812.51	828.82	838.55	848.50	858.88	859.51	847.66	845.12	834.53
202.5	824.16	843.21	859.09	870.94	882.59	887.67	879.20	879.62	871.16
225.0	810.61	836.01	846.81	858.88	871.37	869.46	856.55	851.89	844.69
247.5	809.13	830.30	850.62	867.13	882.16	883.65	877.72	873.06	866.50
270.0	816.33	826.91	841.94	856.97	869.04	860.78	850.62	849.77	841.73
292.5	813.36	820.56	825.22	833.47	840.25	831.57	820.77	815.06	809.55
315.0	839.19	852.53	861.42	870.52	872.64	872.64	866.08	863.11	857.61
337.5	839.19	841.73	843.63	851.89	851.89	838.98	830.51	822.04	819.29
360.0	832.20	836.86	839.40	843.00	844.06	825.22	820.77	813.15	812.30
C/ γ (°)	90.0	95.0	100.0	105.0	110.0	115.0	120.0	125.0	130.0
0.0	814.42	809.55	798.12	775.47	753.66	721.48	676.81	628.33	568.63
22.5	857.82	850.83	837.28	812.30	782.88	743.08	692.27	638.07	575.62
45.0	818.87	812.94	799.60	781.18	751.76	717.04	678.93	625.37	563.55
67.5	839.19	831.57	816.33	794.10	759.17	719.79	670.04	615.00	554.66
90.0	856.34	848.72	835.59	815.90	789.23	755.36	713.01	659.24	594.25
112.5	832.63	828.82	818.23	803.20	777.16	747.52	710.05	664.53	603.99
135.0	873.70	872.00	859.94	842.58	816.54	783.30	735.67	679.57	621.35
157.5	843.21	839.61	831.99	816.33	794.94	766.79	728.47	680.20	622.41
180.0	837.92	838.55	833.26	821.19	800.45	776.31	741.59	693.75	641.46
202.5	871.16	873.27	866.29	848.72	830.51	798.97	758.53	710.47	651.62
225.0	841.31	842.36	836.23	826.91	808.07	783.30	749.85	705.39	656.28
247.5	866.71	869.67	861.63	848.50	831.57	801.08	761.07	716.40	657.97
270.0	844.91	846.39	840.67	826.91	803.41	776.53	736.30	689.09	631.93
292.5	811.88	811.24	804.68	791.34	769.54	744.13	709.20	667.71	612.46
315.0	862.69	858.88	849.35	831.78	804.47	771.87	723.18	670.04	610.97
337.5	823.31	819.71	807.22	793.88	770.60	744.98	705.18	655.22	595.31
360.0	814.42	809.55	798.12	775.47	753.66	721.48	676.81	628.33	568.63



<i>C/γ(°)</i>	135.0	140.0	145.0	150.0	155.0	160.0	165.0	170.0	175.0
0.0	504.49	436.32	364.55	288.55	207.68	135.91	71.34	25.40	4.45
22.5	506.39	434.41	357.78	279.87	200.91	125.12	53.98	16.51	1.69
45.0	497.08	429.54	355.24	278.60	194.56	121.31	58.01	16.72	1.91
67.5	486.28	416.00	338.51	265.05	185.88	116.86	52.50	15.88	2.12
90.0	526.08	454.95	382.34	304.22	222.71	149.46	84.47	33.87	6.99
112.5	539.84	469.98	398.85	324.12	244.94	167.67	95.69	40.86	9.74
135.0	555.30	483.74	409.01	332.37	257.22	172.75	107.76	50.17	9.53
157.5	554.03	487.76	420.02	347.62	269.50	191.17	118.98	59.07	14.40
180.0	578.80	510.63	441.82	369.00	289.40	203.02	130.41	67.32	22.65
202.5	590.23	518.67	446.69	369.84	293.21	214.24	142.26	75.79	27.73
225.0	597.21	526.93	459.82	387.42	309.93	222.08	147.13	78.54	30.06
247.5	593.19	524.18	452.20	377.89	297.65	216.78	145.02	79.39	29.64
270.0	570.33	503.64	433.36	356.08	276.70	191.38	118.98	55.47	16.30
292.5	549.16	487.97	419.38	345.29	259.76	181.64	108.39	48.69	11.86
315.0	546.40	471.89	396.10	319.04	243.03	162.59	92.94	39.17	9.53
337.5	528.41	459.82	392.07	314.59	228.00	153.48	81.93	31.54	5.08
360.0	504.49	436.32	364.55	288.55	207.68	135.91	71.34	25.40	4.45
<i>C/γ(°)</i>	180.0								
0.0	1.27								
22.5	1.06								
45.0	1.48								
67.5	1.69								
90.0	1.91								
112.5	1.27								
135.0	1.27								
157.5	1.06								
180.0	1.27								
202.5	1.06								
225.0	1.48								
247.5	1.69								
270.0	1.91								
292.5	1.27								
315.0	1.27								
337.5	1.06								
360.0	1.27								

**3.2.5 Model Number: HIDFA-63S-EX39-8CCT-BYP/3SP, 5000K at 120V****Electrical data**

Input Voltage(V)	Frequency (Hz)	Input Current (A)	Power (W)	Power Factor
120.080	60	0.522	61.964	0.989

Photometric data

Luminous Flux (lm)	Efficacy (lm/W)	Zonal Lumen in 0-60°(%lm)	Zonal Lumen in 0-90°(%lm)
8558.01	138.11	25.96	55.74



Zonal Flux Diagram



Zonal flux distribution table

$\gamma(^{\circ})$	Average I(cd)	Zonal F(lm)	Sum F(lm)	Eff Flux(%)	Eff Sum(%)
0.0	420.567	0.000	0	0.00%	0.00%
5.0	426.912	10.131	10.131	0.00%	0.12%
10.0	452.640	31.464	41.596	0.00%	0.49%
15.0	498.066	56.395	97.991	0.00%	1.15%
20.0	554.391	86.737	184.728	0.00%	2.16%
25.0	615.396	122.689	307.417	0.00%	3.59%
30.0	671.309	162.834	470.251	0.00%	5.49%
35.0	718.010	204.587	674.838	0.00%	7.89%
40.0	749.996	244.926	919.764	0.00%	10.75%
45.0	766.277	280.750	1200.514	0.00%	14.03%
50.0	777.089	311.859	1512.373	0.00%	17.67%
55.0	788.777	340.471	1852.844	0.00%	21.65%
60.0	805.683	368.555	2221.399	0.00%	25.96%
65.0	820.161	395.246	2616.645	0.00%	30.58%
70.0	814.755	413.971	3030.616	0.00%	35.41%
75.0	812.528	425.346	3455.962	0.00%	40.38%
80.0	811.777	434.619	3890.581	0.00%	45.46%
85.0	805.457	439.441	4330.022	0.00%	50.60%
90.0	801.140	439.899	4769.921	0.00%	55.74%
95.0	797.336	437.675	5207.596	0.00%	60.85%
100.0	793.770	432.342	5639.938	0.00%	65.90%
105.0	778.452	420.683	6060.621	0.00%	70.82%
110.0	749.696	399.433	6460.054	0.00%	75.49%
115.0	720.813	372.342	6832.397	0.00%	79.84%
120.0	686.588	342.142	7174.538	0.00%	83.83%
125.0	640.161	306.674	7481.213	0.00%	87.42%
130.0	589.117	267.286	7748.499	0.00%	90.54%
135.0	531.641	226.466	7974.964	0.00%	93.19%
140.0	468.120	185.114	8160.078	0.00%	95.35%
145.0	398.530	144.594	8304.672	0.00%	97.04%
150.0	323.685	106.351	8411.024	0.00%	98.28%
155.0	242.282	71.624	8482.647	0.00%	99.12%
160.0	165.859	42.806	8525.454	0.00%	99.62%
165.0	100.211	21.928	8547.381	0.00%	99.88%
170.0	43.548	8.528	8555.909	0.00%	99.98%
175.0	10.925	1.949	8557.858	0.00%	100.00%
180.0	1.427	0.148	8558.006	0.00%	100.00%



Luminous Intensity Distribution Diagram

Light Distribution Curve [Unit:cd]

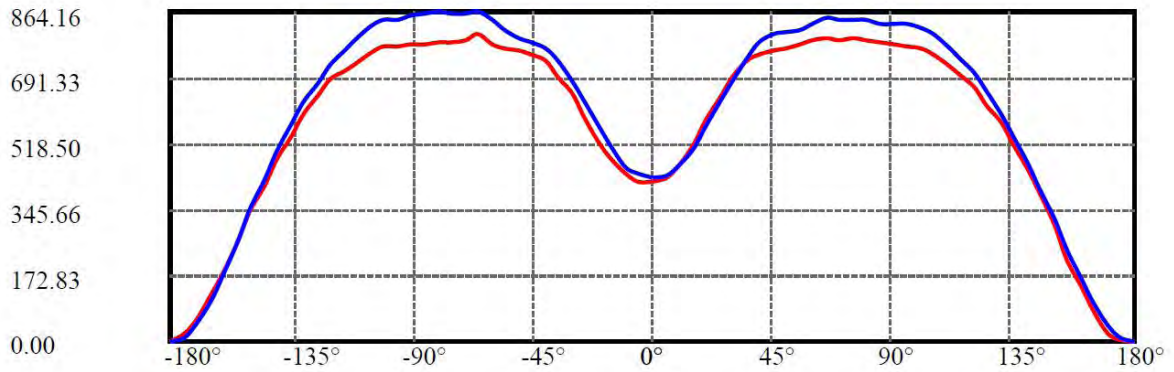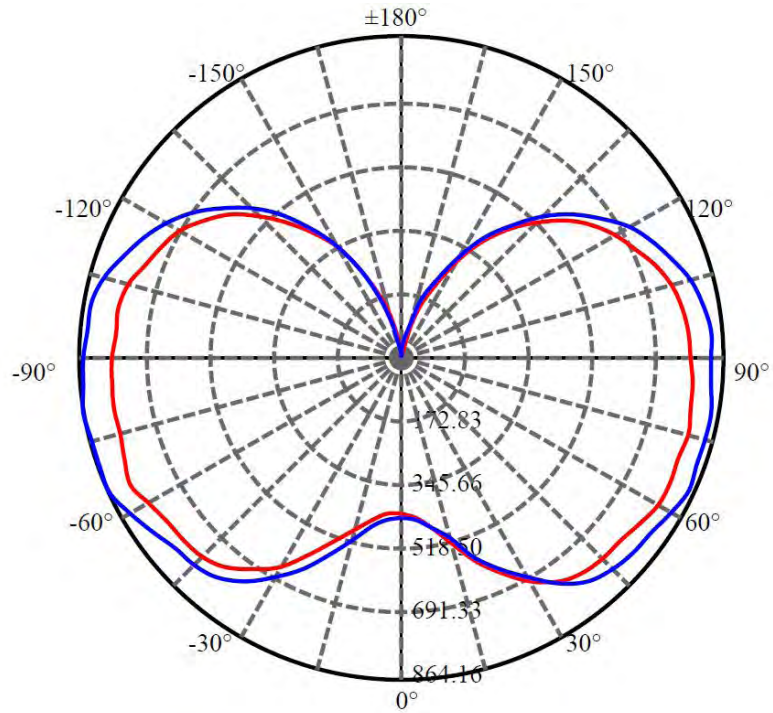

C0/C180:

C90/C270:

Field angle(10%Imax):C0/180Left:168.4 Right:164.9

:C90/270Left:166.6 Right:166.2

Beam Angle(50%Imax):C0/180Left:145.6 Right:143.8

:C90/270Left:144.4 Right:142.6

**Luminous Intensity Distribution Data**

C/ γ ($^{\circ}$)	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0
0.0	420.47	429.68	464.12	514.17	578.84	637.51	691.17	734.42	753.84
22.5	414.66	426.47	465.92	517.58	570.63	626.50	680.16	724.41	741.22
45.0	414.66	430.08	465.12	516.37	585.05	644.52	691.97	728.41	745.23
67.5	418.67	429.68	468.12	517.78	577.64	638.51	692.17	734.42	757.44
90.0	429.68	435.68	461.91	502.36	565.63	626.50	682.76	739.82	782.27
112.5	423.87	431.28	452.70	492.95	560.42	619.29	675.35	728.21	761.05
135.0	421.27	423.67	445.50	488.74	540.80	605.47	661.14	712.59	758.04
157.5	421.27	422.07	441.69	479.53	533.39	595.26	652.93	696.97	739.22
180.0	420.47	420.07	441.29	479.53	519.38	585.25	650.72	692.17	734.02
202.5	414.66	420.87	433.48	474.73	522.58	577.84	638.91	686.56	725.01
225.0	414.66	418.07	433.88	471.92	522.98	587.05	645.92	691.37	723.20
247.5	418.67	419.27	433.08	471.92	520.18	579.24	637.71	682.56	715.20
270.0	429.68	438.49	457.31	507.96	565.23	625.90	682.16	733.62	768.65
292.5	423.87	430.48	457.31	509.57	567.43	631.50	687.76	735.02	764.85
315.0	421.27	426.87	459.31	505.96	563.03	621.09	677.35	723.80	758.24
337.5	421.27	427.88	461.51	517.98	577.04	644.92	692.77	743.83	772.46
360.0	420.47	429.68	464.12	514.17	578.84	637.51	691.17	734.42	753.84
C/ γ ($^{\circ}$)	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0
0.0	761.65	766.05	778.47	791.68	792.68	789.68	795.28	787.88	782.47
22.5	753.84	770.66	792.28	810.30	823.52	826.12	825.32	818.51	813.90
45.0	754.04	765.05	773.66	791.08	799.89	795.08	799.09	790.68	788.88
67.5	765.85	769.66	772.46	782.47	795.48	789.88	786.87	777.26	776.46
90.0	803.89	812.90	817.71	831.92	848.34	842.74	844.54	842.34	834.13
112.5	783.07	789.08	798.09	810.30	813.30	805.90	803.89	804.49	795.68
135.0	772.86	786.07	798.89	813.70	833.33	831.12	829.32	828.72	820.91
157.5	758.84	768.65	782.87	791.48	810.90	803.49	801.49	801.09	793.68
180.0	752.24	761.05	768.05	779.67	804.09	791.28	781.87	783.87	776.46
202.5	747.03	762.85	776.86	802.29	810.10	817.71	809.50	812.10	806.50
225.0	755.64	768.45	778.87	798.09	820.91	815.51	793.68	799.09	793.28
247.5	738.02	752.04	770.26	786.87	801.49	797.09	785.87	787.88	780.27
270.0	783.07	793.88	815.71	840.13	862.16	859.16	857.95	864.16	857.75
292.5	777.26	785.67	794.28	817.51	833.93	819.11	816.71	825.72	815.31
315.0	768.65	784.07	796.29	819.31	836.13	828.32	835.93	838.13	830.12
337.5	784.47	797.29	805.70	824.12	836.33	823.92	833.13	826.52	821.51
360.0	761.65	766.05	778.47	791.68	792.68	789.68	795.28	787.88	782.47
C/ γ ($^{\circ}$)	90.0	95.0	100.0	105.0	110.0	115.0	120.0	125.0	130.0
0.0	778.47	773.26	768.45	753.24	723.80	695.37	662.94	619.69	571.84
22.5	806.50	805.10	795.88	778.67	747.43	713.19	674.15	620.29	562.83
45.0	779.87	775.06	769.86	757.24	727.61	693.77	658.13	616.69	566.63
67.5	771.26	764.85	760.25	746.03	719.60	686.36	650.92	610.48	559.42
90.0	832.93	832.13	819.91	803.49	771.46	738.22	705.58	654.33	597.26
112.5	791.48	790.28	787.28	773.46	745.23	711.79	680.96	641.11	590.26
135.0	822.11	817.51	810.50	791.48	764.05	732.01	694.97	645.32	592.06
157.5	793.08	789.48	783.27	769.06	741.22	714.39	681.76	632.10	581.05
180.0	777.06	770.66	771.06	758.64	730.81	708.59	685.16	642.71	595.66
202.5	802.69	801.49	797.89	781.87	751.84	730.21	687.96	636.51	588.25
225.0	789.28	785.67	787.68	773.46	747.23	731.81	704.78	656.33	611.28
247.5	776.46	773.86	774.06	759.24	732.81	711.79	680.16	637.11	590.26
270.0	850.75	843.54	843.74	823.92	794.28	762.05	722.40	677.15	625.50
292.5	809.70	803.69	807.10	792.08	762.85	736.42	703.18	659.13	605.87
315.0	821.11	819.51	816.31	798.29	768.45	734.22	693.77	642.31	591.86
337.5	815.51	811.30	807.10	795.08	766.45	732.81	698.58	651.32	595.86
360.0	778.47	773.26	768.45	753.24	723.80	695.37	662.94	619.69	571.84



C/γ(°)	135.0	140.0	145.0	150.0	155.0	160.0	165.0	170.0	175.0
0.0	513.57	452.70	385.63	305.54	216.64	143.96	79.69	22.02	2.80
22.5	503.96	432.48	359.40	289.52	209.43	135.55	73.48	25.23	4.41
45.0	507.36	444.29	374.62	295.33	210.03	138.95	73.28	25.43	5.01
67.5	500.36	437.09	367.41	288.72	202.83	133.35	71.48	26.63	4.61
90.0	535.60	469.12	397.24	320.76	243.87	167.19	100.31	44.05	11.81
112.5	539.40	476.33	406.05	335.57	246.67	171.19	105.32	46.45	13.01
135.0	529.79	463.92	397.84	322.36	248.28	168.79	107.32	51.66	16.42
157.5	525.18	465.12	400.05	332.57	258.69	182.20	115.13	55.66	18.42
180.0	538.00	475.33	410.46	341.58	260.89	183.80	123.14	60.07	18.82
202.5	532.99	475.13	402.45	327.36	263.49	186.61	119.33	57.66	16.42
225.0	554.82	493.35	427.28	355.60	273.70	193.62	127.94	65.07	17.22
247.5	537.00	478.33	410.66	341.18	267.70	191.61	125.14	60.07	13.82
270.0	566.63	500.96	422.87	347.39	263.89	177.60	105.12	47.85	13.42
292.5	553.02	491.15	422.07	341.98	246.47	169.59	100.91	42.85	9.61
315.0	530.79	465.72	394.84	319.16	237.86	157.98	89.90	35.24	6.81
337.5	537.80	468.92	397.64	314.35	226.05	151.77	85.90	30.83	2.20
360.0	513.57	452.70	385.63	305.54	216.64	143.96	79.69	22.02	2.80
C/γ(°)	180.0								
0.0	1.20								
22.5	1.20								
45.0	1.40								
67.5	1.40								
90.0	1.80								
112.5	1.40								
135.0	1.60								
157.5	1.40								
180.0	1.20								
202.5	1.20								
225.0	1.40								
247.5	1.40								
270.0	1.80								
292.5	1.40								
315.0	1.60								
337.5	1.40								
360.0	1.20								

**3.2.6 Model Number: HIDFA-63S-EX39-8CCT-BYP/3SP, 5000K at 277V****Electrical data**

Input Voltage(V)	Frequency (Hz)	Input Current (A)	Power (W)	Power Factor
277.210	60	0.251	62.690	0.903

Photometric data

Luminous Flux (lm)	Efficacy (lm/W)	Zonal Lumen in 0-60°(%lm)	Zonal Lumen in 0-90°(%lm)
8668.55	138.28	26.04%	55.78



Zonal Flux Diagram



Zonal flux distribution table

$\gamma(^{\circ})$	Average I(cd)	Zonal F(lm)	Sum F(lm)	Eff Flux(%)	Eff Sum(%)
0.0	429.400	0.000	0	0.00%	0.00%
5.0	436.195	10.348	10.348	0.00%	0.12%
10.0	460.391	32.074	42.422	0.00%	0.49%
15.0	504.510	57.237	99.659	0.00%	1.15%
20.0	563.134	87.989	187.648	0.00%	2.16%
25.0	626.108	124.729	312.377	0.00%	3.60%
30.0	681.423	165.469	477.846	0.00%	5.51%
35.0	730.626	207.934	685.781	0.00%	7.91%
40.0	763.290	249.249	935.029	0.00%	10.79%
45.0	778.683	285.509	1220.538	0.00%	14.08%
50.0	788.979	316.769	1537.307	0.00%	17.73%
55.0	800.936	345.700	1883.008	0.00%	21.72%
60.0	817.088	374.002	2257.009	0.00%	26.04%
65.0	829.572	400.306	2657.315	0.00%	30.65%
70.0	823.896	418.669	3075.984	0.00%	35.48%
75.0	820.923	429.929	3505.913	0.00%	40.44%
80.0	821.180	439.381	3945.294	0.00%	45.51%
85.0	815.196	444.643	4389.937	0.00%	50.64%
90.0	811.116	445.297	4835.234	0.00%	55.78%
95.0	807.371	443.154	5278.388	0.00%	60.89%
100.0	803.986	437.844	5716.232	0.00%	65.94%
105.0	787.692	425.889	6142.121	0.00%	70.86%
110.0	758.413	404.127	6546.248	0.00%	75.52%
115.0	729.223	376.679	6922.927	0.00%	79.86%
120.0	694.461	346.100	7269.027	0.00%	83.86%
125.0	647.202	310.121	7579.149	0.00%	87.43%
130.0	594.846	270.062	7849.211	0.00%	90.55%
135.0	536.995	228.705	8077.916	0.00%	93.19%
140.0	473.429	187.088	8265.004	0.00%	95.34%
145.0	404.110	146.411	8411.415	0.00%	97.03%
150.0	328.382	107.865	8519.279	0.00%	98.28%
155.0	246.554	72.759	8592.038	0.00%	99.12%
160.0	168.702	43.553	8635.591	0.00%	99.62%
165.0	101.648	22.281	8657.871	0.00%	99.88%
170.0	43.398	8.604	8666.475	0.00%	99.98%
175.0	10.515	1.929	8668.404	0.00%	100.00%
180.0	1.287	0.141	8668.545	0.00%	100.00%



Luminous Intensity Distribution Diagram

Light Distribution Curve [Unit:cd]

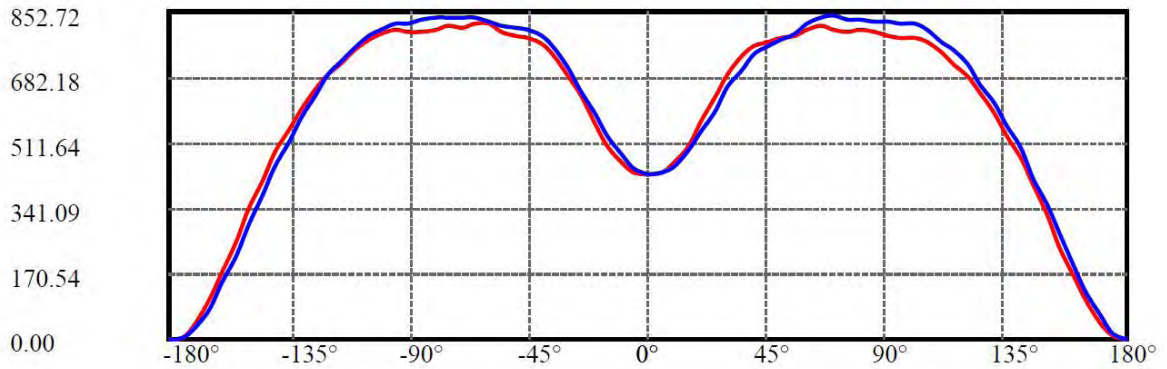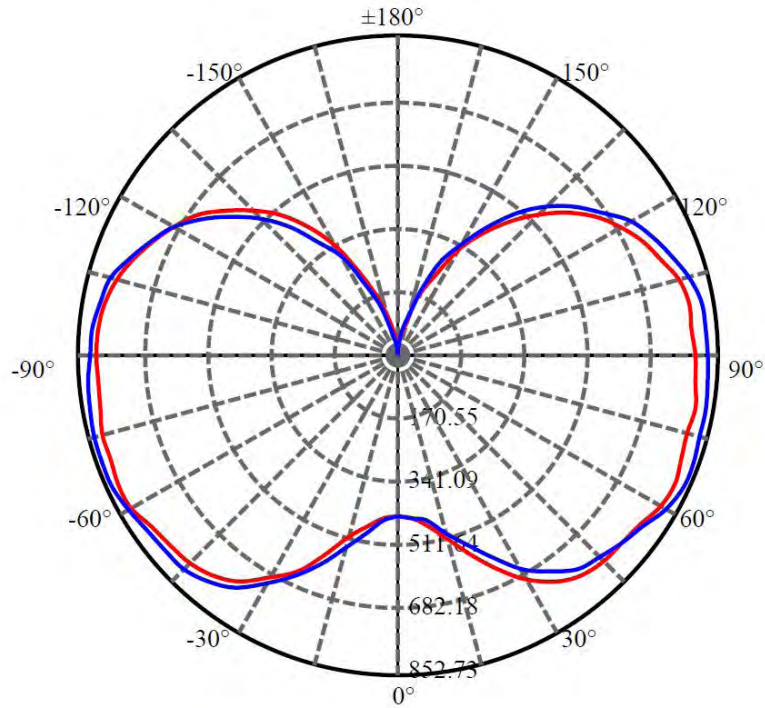

C0/C180: —

C90/C270: —

Field angle(10%Imax):C0/180Left:167.0 Right:166.6

:C90/270Left:164.7 Right:168.2

Beam Angle(50%Imax):C0/180Left:145.3 Right:144.3

:C90/270Left:141.9 Right:145.0

**Luminous Intensity Distribution Data**

<i>C/γ(°)</i>	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0
0.0	428.32	434.70	461.68	505.75	566.29	630.95	688.19	734.94	762.74
22.5	430.17	435.53	456.94	499.16	558.26	616.33	670.07	718.05	754.09
45.0	429.35	434.09	454.68	504.51	567.11	627.03	686.34	731.44	763.56
67.5	425.23	434.29	454.47	502.45	558.05	618.80	669.25	713.93	738.23
90.0	428.11	434.70	448.50	490.10	537.66	593.68	657.92	700.75	743.79
112.5	429.76	435.32	452.41	489.89	541.58	609.53	671.31	719.49	759.85
135.0	435.32	432.85	452.41	493.80	544.05	607.88	663.89	712.90	754.91
157.5	428.94	434.29	459.62	496.69	554.34	629.09	686.55	738.44	775.92
180.0	428.32	434.50	460.65	500.60	564.02	634.04	683.05	736.38	767.06
202.5	430.17	437.17	459.00	498.95	561.76	619.62	668.42	723.82	750.38
225.0	429.35	438.00	458.38	503.48	569.99	633.01	685.52	732.88	761.50
247.5	425.23	433.88	457.77	496.89	561.35	630.12	685.72	738.64	770.97
270.0	428.11	442.53	482.07	530.46	588.53	645.77	702.81	758.00	787.04
292.5	429.76	439.65	473.00	523.87	592.85	655.04	705.49	755.32	783.33
315.0	435.32	440.88	468.06	521.81	574.94	635.89	689.02	740.09	770.97
337.5	428.94	436.76	466.62	513.78	569.38	630.95	689.22	734.94	768.30
360.0	428.32	434.70	461.68	505.75	566.29	630.95	688.19	734.94	762.74
<i>C/γ(°)</i>	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0
0.0	775.09	781.48	787.45	806.19	814.42	804.13	797.54	805.36	797.33
22.5	768.92	782.51	797.95	812.98	833.37	829.66	822.87	829.66	825.54
45.0	783.33	794.66	810.10	832.34	847.99	827.60	818.13	824.72	821.63
67.5	760.47	767.89	791.36	803.72	814.01	804.54	796.30	804.95	799.60
90.0	762.33	777.36	793.21	820.40	836.05	840.78	831.10	832.75	828.01
112.5	779.01	783.33	794.45	807.42	837.90	827.40	818.34	820.40	809.07
135.0	772.42	786.42	802.07	813.60	833.57	834.40	833.37	836.05	827.40
157.5	791.57	807.01	817.31	832.75	852.73	843.05	840.99	837.28	829.66
180.0	784.15	790.33	799.80	819.16	821.84	812.78	816.69	807.63	801.04
202.5	764.59	783.33	797.74	819.78	840.99	837.49	835.84	834.81	828.43
225.0	770.15	785.18	793.21	817.51	814.84	816.07	814.01	806.19	802.89
247.5	786.62	793.42	801.25	808.86	816.28	817.31	808.04	804.33	796.30
270.0	803.92	808.66	816.48	828.84	836.25	835.84	837.90	835.43	829.25
292.5	795.27	797.74	805.98	810.31	813.19	809.07	812.78	810.72	806.39
315.0	780.65	793.63	804.54	823.48	833.57	827.81	831.72	828.01	823.48
337.5	780.45	790.74	802.07	816.07	826.16	814.42	819.16	820.60	817.10
360.0	775.09	781.48	787.45	806.19	814.42	804.13	797.54	805.36	797.33
<i>C/γ(°)</i>	90.0	95.0	100.0	105.0	110.0	115.0	120.0	125.0	130.0
0.0	790.74	784.36	786.01	775.30	744.62	717.64	685.52	640.42	587.70
22.5	818.75	816.69	813.81	794.24	765.83	733.50	688.81	639.18	589.97
45.0	812.16	807.01	809.48	795.89	765.62	739.88	711.46	662.04	607.06
67.5	793.42	788.48	793.01	775.50	746.06	720.52	683.66	640.63	592.65
90.0	824.72	821.01	821.63	802.89	772.62	750.38	712.70	661.22	613.03
112.5	808.04	805.36	804.54	788.68	760.88	739.88	718.88	675.22	626.83
135.0	825.75	823.48	818.75	802.69	772.00	751.41	712.49	661.63	613.24
157.5	831.72	828.43	825.13	810.51	780.04	751.62	719.91	672.34	615.71
180.0	802.27	803.30	796.30	777.36	753.06	718.88	688.40	649.27	598.62
202.5	824.93	823.48	817.51	797.13	768.09	736.79	701.78	643.71	586.26
225.0	799.80	797.74	790.95	777.15	747.29	711.67	678.72	635.89	584.20
247.5	796.51	795.27	789.92	770.36	745.44	717.64	679.54	636.71	589.14
270.0	821.22	818.54	807.01	790.13	757.80	725.26	688.19	633.01	576.79
292.5	796.71	791.98	786.62	776.33	746.47	711.46	680.37	640.42	586.88
315.0	820.40	809.48	804.33	786.83	756.97	720.73	679.13	628.68	567.93
337.5	810.72	803.30	798.77	782.09	751.82	720.32	681.81	634.86	581.53
360.0	790.74	784.36	786.01	775.30	744.62	717.64	685.52	640.42	587.70



C/γ(°)	135.0	140.0	145.0	150.0	155.0	160.0	165.0	170.0	175.0
0.0	529.43	470.12	401.14	324.74	240.52	166.39	100.90	41.60	8.86
22.5	532.52	469.50	395.99	323.30	249.17	166.59	100.49	37.68	10.91
45.0	552.49	492.57	423.58	345.13	254.11	178.12	108.11	40.57	8.24
67.5	537.25	475.89	409.37	336.27	251.02	172.36	105.02	40.77	9.88
90.0	558.46	495.66	420.49	348.01	274.70	190.27	120.67	63.84	18.12
112.5	565.67	499.77	436.97	363.25	275.11	192.74	124.58	61.98	18.95
135.0	553.11	486.80	416.58	342.24	265.23	182.86	113.46	52.92	17.30
157.5	553.31	486.39	418.02	336.07	255.34	174.21	108.32	47.57	10.30
180.0	546.11	486.39	415.35	340.60	252.05	173.59	106.67	44.07	3.50
202.5	525.51	455.71	388.16	311.77	239.08	159.38	96.58	39.13	11.12
225.0	530.25	469.30	400.31	323.30	243.19	166.59	97.20	40.16	11.12
247.5	529.63	467.65	399.70	325.56	239.08	163.71	95.14	42.42	10.71
270.0	516.25	448.91	374.37	298.38	215.81	146.41	79.90	30.68	5.97
292.5	526.34	462.91	394.96	314.24	225.28	151.97	86.69	33.36	5.35
315.0	512.75	445.00	375.19	300.85	224.87	149.91	88.75	37.07	8.24
337.5	522.84	462.30	395.58	320.42	240.31	164.12	93.90	40.57	9.68
360.0	529.43	470.12	401.14	324.74	240.52	166.39	100.90	41.60	8.86
C/γ(°)	180.0								
0.0	1.24								
22.5	1.24								
45.0	1.03								
67.5	1.24								
90.0	1.65								
112.5	1.44								
135.0	1.44								
157.5	1.03								
180.0	1.24								
202.5	1.24								
225.0	1.03								
247.5	1.24								
270.0	1.65								
292.5	1.44								
315.0	1.44								
337.5	1.03								
360.0	1.24								



4 Additional Test

Model Number	Test Voltage (V)	Frequency(Hz)	Power Factor	THD
HIDFA-63S-EX39-8CCT-BY P/3SP	120	60	0.989	11.2%
	277	60	0.915	15.1%



Photo Document



****End of test report****