

# Photometric Test Report

## Relevant Standards

- ☒ IES LM-79-2008
- ☒ ANSI C82.77:2017

## Prepared For

**RAB Lighting Inc.**

Room 6A33, No.1388, Wuzhong road, Shanghai, China

Xiao Xiang, 15921313292, Gary.Xiao@rabweb.com

## Prepared By

**Deliver Co., Ltd.**

Block 11, 78 Keling Road, SSTP, Suzhou, China

0512-66801950, kevin.jia@szdeliver.com

## Project Number

**DLF2211104**

## Report Number

**DLF2211104-31a**

## Test Date

**2022/11/23**

## Issue Date

**2022/11/29**

## Prepared By



Wangzun Zhu

## Approved By



Kevin Jia

The results contained in this report pertain only to the tested sample.

This report shall not be reproduced, except in full, without written approval of Deliver Co., Ltd.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP.

## 1.0 Test Summary

DLC Technical Requirements v5.1

Indoor - Linear Ambient - Direct Linear Ambient Luminaires				
Requirement Category	Test Method	Requirements		Test value
Luminaire Output (lm) (Goniophotometer - Section 4.2)	IES LM-79-2008	-		723
Lumen/ft (Goniophotometer - Section 4.2)	IES LM-79-2008	$\geq 375$		274
Minimum Luminaire Efficacy (lm/W) (Goniophotometer - Section 4.2)	IES LM-79-2008	-		82.2
Power (Input Wattage) (W) (Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		8.8
Total Harmonic Distortion (A%) (THD & PF - section 4.3)	ANSI C82.77:2014	20.00%		8.83%
Power Factor (THD & PF - section 4.3)	ANSI C82.77:2014	0.9		0.993
Allowable CCTs* (K) (Integrating Sphere - Section 4.1)	IES LM-79-2008	7 step	2725 $\pm$ 145	2682
		4 step	2725 $\pm$ 83	
Minimum CRI (Integrating Sphere - Section 4.1)	IES LM-79-2008 CIE 13.3-1995	$\geq 80$		94
Minimum R9 (Integrating Sphere - Section 4.1)	IES LM-79-2008 CIE 13.3-1995	$\geq 0$		68
Minimum Rf (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	$\geq 70$		92
Minimum Rg (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	$\geq 89$		97
Minimum IES Rcs,h1 (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	$-12\% \leq \text{IES Rcs,h1} \leq +23\%$		-4%
Zonal Lumen Requirement (0°-60°) (Goniophotometer - Section 4.2)	IES LM-79-2008	$\geq 40\%$		78.95%
Corrected UGR (X=4H, Y=8H, 70/50/20%) (Goniophotometer - Section 4.2)	CIE 190-2010	<22		23.8

## 2.0 Test List

Test Item	Test	Test Date	Model Number	Sample No.
1	Integrating Sphere Test	2022/11/23	KNOOKFA32 / 8W / 2700K	AE1
2	Goniophotometer Test	2022/11/23	KNOOKFA32 / 8W / 2700K	AE1
3	THD and PF Test	2022/11/23	KNOOKFA32 / 8W / 2700K	AE1

### Remark(If any)


- 1、 This report shall not be used by the client to claim product endorsement by NVLAP, NIST or any agency of the US government.
- 2、 The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.

## 3.0 Production Description

**Luminaire Description:** KNOOKFA32 / 8W / 2700K

**Electrical Specification:** 120V,50/60HZ

### Photos of Luminaire Characteristics

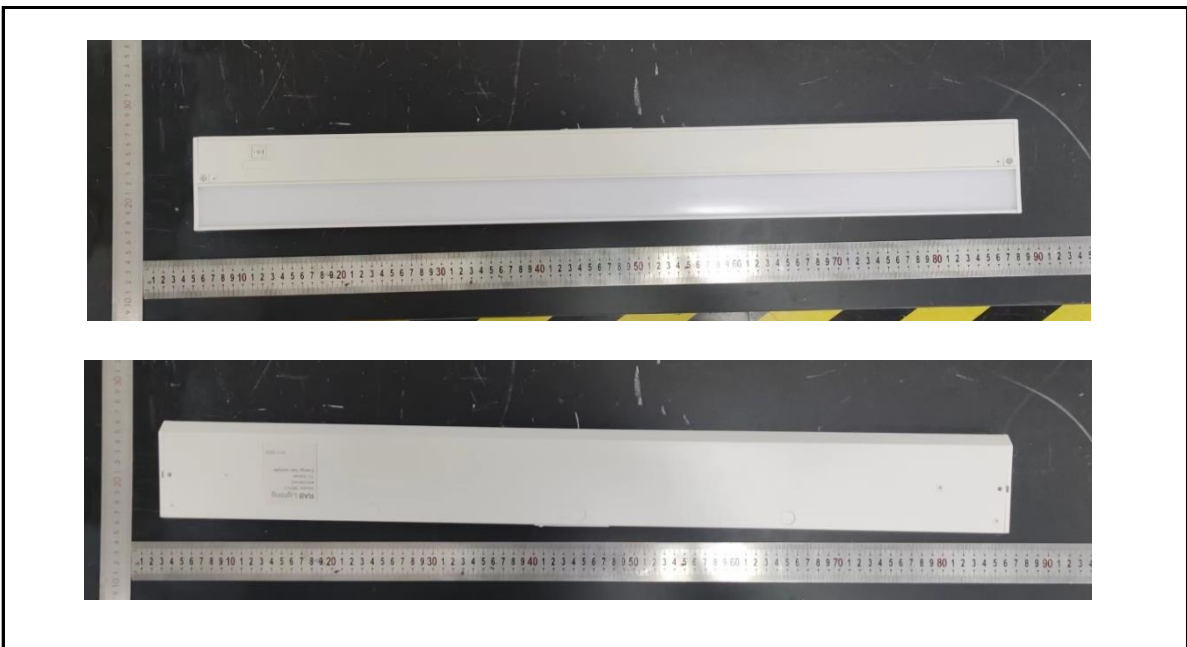

## 4.0 LM-79 Measurement and Test Results

### 4.1 Integrating Sphere Test

Model No.	KNOOKFA32 / 8W / 2700K	Sample ID.	AE1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.3	Humidity (%RH)	55.4

#### Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at  $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$ .

The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within  $\pm 0.2$  percent under load.

The sample was measured using  $4\pi$  geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.

#### Test Result

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
120.04	60	0.073	8.7	0.993


#### Test Result

CCT (K)	CRI	R9	Duv
2682	94	68	0.0029

Rf	Rg	IES Rcs,h1
92	97	-4%

## 4.1 Integrating Sphere Test

### Results

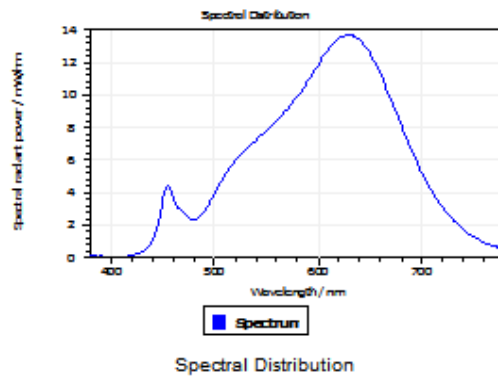


#### Spectral values

DominantWavelength 583.41 nm  
Purity 0.661  
PeakWavelength 628.74 nm  
Radiant Power 2.249 W  
Width50%:

#### Color Coordinates

Correlated Color Temporal 2682 K  
x: 0.4665 u: 0.2625 u': 0.2625  
y: 0.4201 v: 0.3546 v': 0.5319

CRI01	94.0	CRI09	67.5
CRI02	95.7	CRI10	89.0
CRI03	96.3	CRI11	95.9
CRI04	94.9	CRI12	79.2
CRI05	93.2	CRI13	94.3
CRI06	95.3	CRI14	96.8
CRI07	95.1	CRI15	90.3
CRI08	86.3	CRI16	89.6
ResultsCRI	93.9		

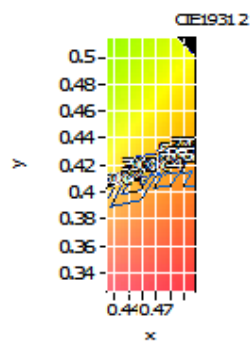

PlankDistance 2.9E-003

## 4.1 Integrating Sphere Test


### IES TM-30-18 Color Rendition Report

Source: DLF2211104-31a

Manufacturer: RAB Lighting Inc.

Date: 2022/11/23

Model: KNOOKFA32 / 8W / 2700K

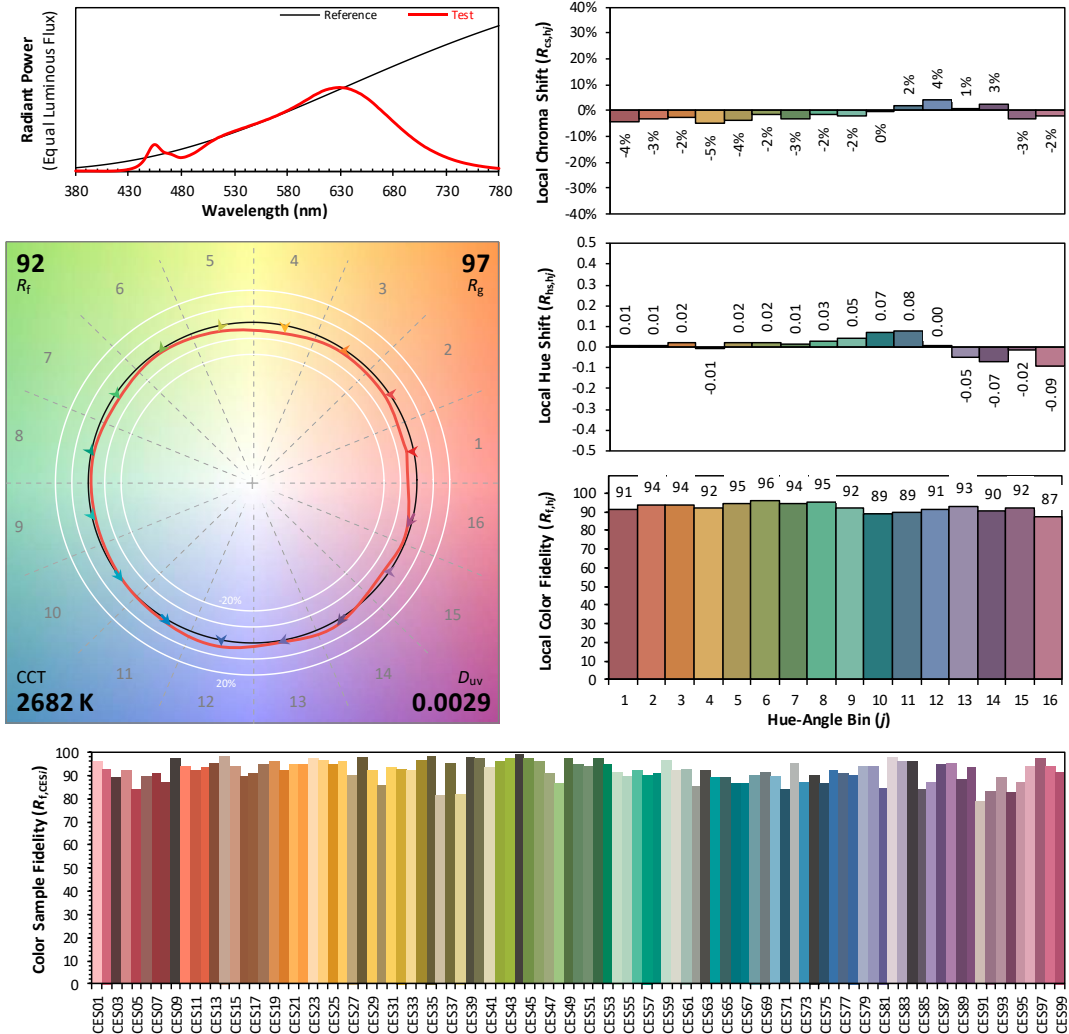

Notes: This is a recommended method for displaying IES TM-30-18 information.

$x$  0.4665  
 $y$  0.4201  
 $u'$  0.2625  
 $v'$  0.5319

CIE 13.3-1995  
(CRI)

$R_a$  94  
 $R_g$  68

## 4.0 LM-79 Measurement and Test Results

### 4.2 Goniophotometer Test

Model No.	KNOOKFA32 / 8W / 2700K	Sample ID.	AE1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.3	Humidity (%RH)	54.0

#### Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using a type C goniophotometer and software.

The ambient temperature shall be maintained at  $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$ , measured at a point not more than 1 m from the sample and at the same height as the sample.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within  $\pm 0.2$  percent under load.

The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at  $0.5^{\circ}$  vertical intervals and  $10^{\circ}$  horizontal intervals.

#### Test Conditions

Condition	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
WORST CASE	120.06	60	0.074	8.8	0.991


#### Test Result

Flux (lm)	Field Angle(10%)		Beam Angle(50%)		Luminous Efficacy (lm/W)
	C0-180	C90-270	C0-180	C90-270	
723	159.1	161.8	109.5	116.1	82.2


Zonal Lumen Requirement ( $0^{\circ}$ - $60^{\circ}$ )	UGR (X=4H, Y=8H, 70/50/20%)	Length(ft)	Lumen/ft
78.95%	23.8	2.64	274

## 4.2 Goniophotometer Test

### Light Distrubtion Curve

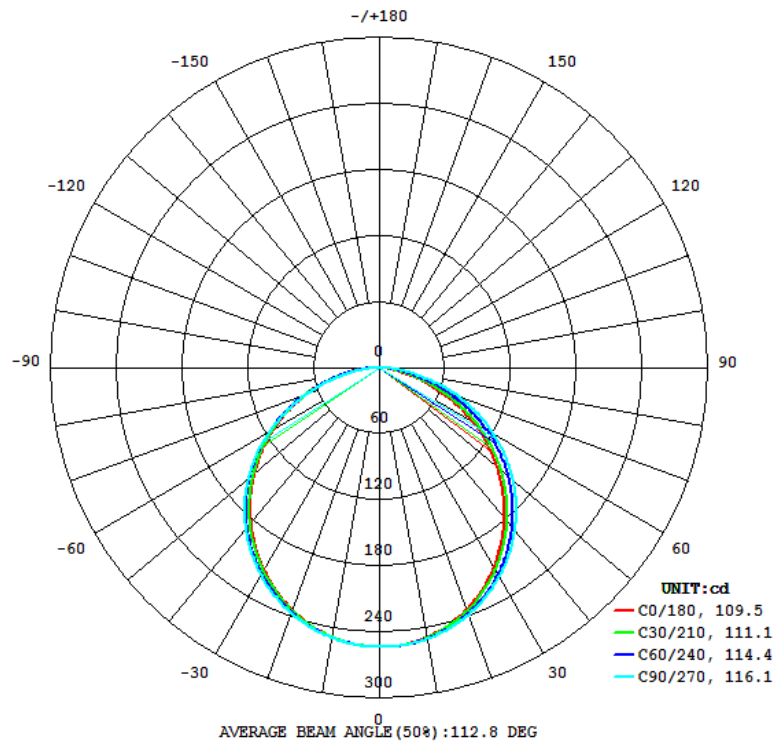

### Isolux Plot

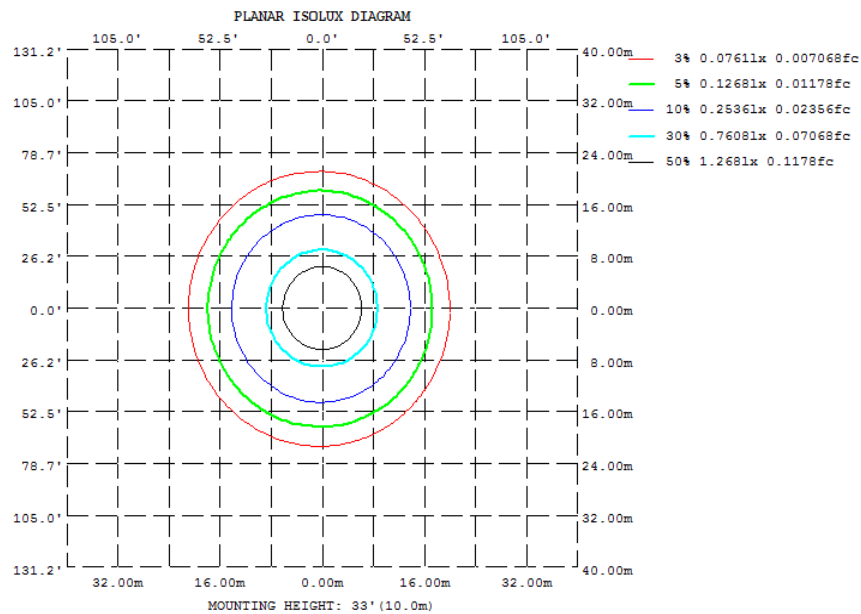



## 4.2 Goniophotometer Test

### Zonal Lumen Summary

γ	C0	C45	C90	C135	C180	C225	C270	C315
10	248.7	249.4	250.0	249.3	248.5	248.7	249.3	248.9
20	233.6	236.1	238.5	236.3	234.0	235.2	236.8	235.1
30	209.5	214.6	219.2	215.4	211.3	214.0	216.8	212.8
40	178.2	185.5	193.0	188.0	182.6	186.2	189.9	183.3
50	141.1	149.9	160.1	155.2	149.2	153.1	156.5	146.8
60	99.26	108.9	121.0	117.6	112.0	115.0	116.5	105.6
70	54.91	64.01	76.71	76.52	72.61	73.76	71.96	60.35
80	14.48	20.81	31.31	34.43	33.18	32.11	26.91	17.71
90	0.0579	0.1419	0.4898	2.102	2.046	1.023	0.1985	0.1380
100	0.0574	0.1076	0.2007	0.1083	0.0618	0.0877	0.1623	0.0742
110	0.0858	0.0927	0.1535	0.0827	0.1023	0.1054	0.1105	0.1129
120	0.1166	0.1230	0.1190	0.1085	0.1313	0.1397	0.1457	0.1463
130	0.1482	0.1526	0.1464	0.1406	0.1831	0.1875	0.1930	0.2013
140	0.1775	0.1783	0.1711	0.1690	0.2432	0.2329	0.2405	0.2523
150	0.1983	0.1978	0.1892	0.1892	0.2567	0.2480	0.2440	0.2533
160	0.2167	0.2119	0.2054	0.2058	0.2582	0.2506	0.2406	0.2476
170	0.2311	0.2263	0.2191	0.2211	0.2562	0.2577	0.2458	0.2501
180	0.2686	0.2483	0.2414	0.2495	0.2653	0.2552	0.2442	0.2444
DEG	LUMINOUS INTENSITY:cd							

### UGR Table - Corrected

<b>UGR Table - Corrected</b>										
Reflectances										
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20
Room Size										
X=2H Y=2H	UGR Viewed Crosswise					UGR Viewed Endwise				
3H	19.5	21.1	19.8	21.4	21.7	19.1	20.7	19.4	21.0	21.3
4H	21.4	22.8	21.7	23.2	23.5	21.0	22.5	21.4	22.8	23.2
6H	22.0	23.5	22.4	23.8	24.2	21.7	23.1	22.1	23.5	23.9
8H	22.6	23.8	23.0	24.2	24.6	22.3	23.6	22.7	24.0	24.4
12H	22.7	23.9	23.1	24.3	24.7	22.5	23.8	22.9	24.1	24.5
4H	22.8	24.0	23.2	24.4	24.8	22.7	23.8	23.1	24.2	24.7
2H	20.0	21.4	20.4	21.8	22.2	19.8	21.2	20.2	21.5	21.9
3H	22.2	23.3	22.6	23.7	24.1	21.9	23.1	22.3	23.5	23.9
4H	23.0	24.0	23.4	24.5	24.9	22.8	23.9	23.2	24.3	24.7
6H	23.6	24.5	24.1	25.0	25.4	23.5	24.5	24.0	24.9	25.3
8H	23.8	24.7	24.3	25.1	25.6	23.8	24.6	24.2	25.1	25.5
12H	23.9	24.7	24.4	25.2	25.7	24.0	24.7	24.4	25.2	25.7
4H	23.2	24.1	23.7	24.6	25.0	23.2	24.0	23.6	24.5	24.9
6H	24.0	24.7	24.5	25.2	25.7	24.0	24.7	24.5	25.2	25.7
8H	24.3	24.9	24.8	25.4	25.9	24.4	25.0	24.9	25.5	26.0
12H	24.4	25.0	24.9	25.5	26.1	24.6	25.2	25.1	25.7	26.3
4H	23.3	24.0	23.7	24.5	25.0	23.2	24.0	23.7	24.5	24.9
6H	24.0	24.7	24.6	25.2	25.7	24.1	24.8	24.6	25.2	25.8
8H	24.3	24.9	24.8	25.4	26.0	24.5	25.1	25.0	25.5	26.1
Maximum UGR = 26.3										

## 4.2 Goniophotometer Test

### ZONAL LUMEN SUMMARY

	Zonal (lm)		Total (lm)	Percent
0-10	24.00	0 - 10	24.00	3.32%
10-20	68.70	0 - 20	92.70	12.81%
20-30	104.11	0 - 30	196.81	27.20%
30-40	125.63	0 - 40	322.44	44.57%
40-50	130.62	0 - 50	453.06	62.62%
50-60	118.13	0 - 60	571.19	78.95%
60-70	89.66	0 - 70	660.85	91.34%
70-80	49.71	0 - 80	710.56	98.21%
80-90	11.92	0 - 90	722.48	99.86%
90-100	0.18	0 - 100	722.66	99.88%
100-110	0.11	0 - 110	722.77	99.90%
110-120	0.11	0 - 120	722.88	99.91%
120-130	0.13	0 - 130	723.01	99.93%
130-140	0.15	0 - 140	723.16	99.95%
140-150	0.14	0 - 150	723.30	99.97%
150-160	0.11	0 - 160	723.41	99.99%
160-170	0.07	0 - 170	723.48	100.00%
170-180	0.02	0 - 180	723.50	100.00%

## 4.2 Goniophotometer Test


### COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

#### Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	100	96	106	102	98	94	97	94	91	94	91	89	90	88	86	84
2	99	91	84	78	96	89	82	77	85	80	75	82	77	74	79	75	72	70
3	90	80	71	65	88	78	70	64	75	68	63	72	67	62	70	65	61	59
4	82	70	62	55	80	69	61	54	66	59	54	64	58	53	62	57	52	50
5	76	63	54	47	74	62	53	47	60	52	46	58	51	46	56	50	45	43
6	70	57	48	41	68	56	47	41	54	46	40	52	45	40	50	44	40	38
7	65	51	42	36	63	50	42	36	49	41	36	47	41	36	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	43	37	32	42	36	32	30
9	56	43	35	29	55	42	34	29	41	34	29	40	33	29	39	33	28	27
10	53	40	32	26	52	39	31	26	38	31	26	37	31	26	36	30	26	24

### CONE OF LIGHT DIAGRAM

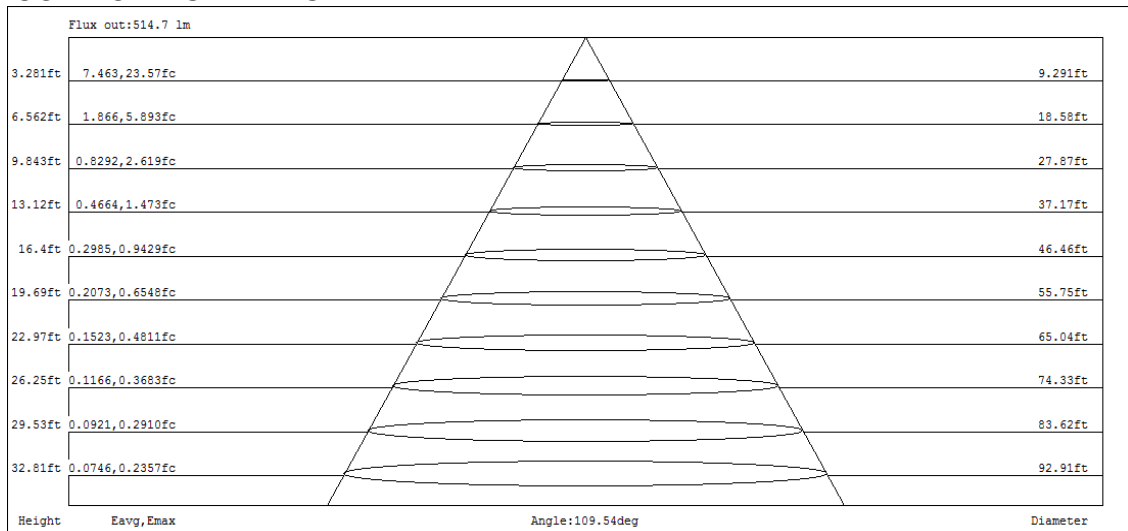

## 4.0 LM-79 Measurement and Test Results

### 4.3 THD and PF Test

Model No.	KNOOKFA32 / 8W / 2700K	Sample ID.	AE1
Temperature (°C)	25.3	Humidity (%RH)	55.4

#### Test Method

The samples were tested according to the ANSI C82.77:2002.

The total harmonic distortion shall be measured to the 40th order.

The ambient temperature condition was maintained at  $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$ . The sample measurements were made using a digital power meter and power supply. The sample was operated at rated voltage and was stabilized before measurement. The total harmonic distortion were calculated.

#### Test Results

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	THD
120.04	60	0.073	8.7	0.993	8.83%

## 5.0 Equipment Information

Test Equipment			
Equipment ID	Equipment Name	Last Calibration Date	Calibration Due Date
DLF107	Integrating Sphere System	2021/12/26	2022/12/25
DLF108	Auxiliary Lamp	2021/12/26	2022/12/25
DLF122	Measurement Standard Lamp Standard Lamp Type: 220 V, 0.4720 A, Tungsten, Omni-derectional	2021/12/26	2022/12/25
DLF116	AC Power Source	2021/12/26	2022/12/25
DLF113	Power Meter	2021/12/26	2022/12/25
DLF112	Temperature Recorder	2021/12/26	2022/12/25
DLF114	Temperature & Humidity Datalogger	2021/12/26	2022/12/25
DLF101	Goniophotometer	2021/12/26	2022/12/25
DLF125	Standard Lamp Standard Lamp Type: 76.58 V, 6.7875 A, Tungsten, Omni-derectional	2021/12/26	2022/12/25
DLF104	AC Power Source	2021/12/26	2022/12/25
DLF507	DC Power Source	2021/12/26	2022/12/25
DLF102	Power Meter	2021/12/26	2022/12/25
DLF111	Temperature & Humidity Datalogger	2021/12/26	2022/12/25
DLF119	Power Meter	2021/12/26	2022/12/25
DLF031	Temperature data logger	2021/12/26	2022/12/25
DLF022	Digital power meter	2021/12/26	2022/12/25
DLF003	Temperature & Humidity Datalogger	2021/12/26	2022/12/25

\*\*\*\*\* End of Test Report\*\*\*\*\*