



Report No.: BLC2007001E-C-R

LM-79-08 Test Report

For

RAB Lighting Inc.

(Brand Name: RAB Lighting)

Room 6A33, No.1388, Wuzhong road, Shanghai, China.
Xiao Xiang, 15921313292, Gary.Xiao@rabweb.com

Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires

Model name(s): BRISK17FA30[blank, W]
Remark: "blank" for Bronze, "W" for White.

Representative (Tested) Model:

BRISK17FA30(Tested at 0% CCT Setting)
BRISK17FA30(Tested at 50% CCT Setting)
BRISK17FA30(Tested at 100% CCT Setting)

Model Different: N/A

Test & Report By:

Grace Li

Engineer: Grace Li

Date: July 6, 2020

Update: July 21, 2020(Added Reported Rcs,h1 (%) data)

Update: July 24, 2020(Added Reported Rcs,h1 (%) data for 4000K & 5000K CCT setting)

Update: Aug 7, 2020(Updated the TM-30 screenshot to DLC required format)

Review By:

Jason Luo

Manager: Jason Luo



1.1 Product Information:

| | | |
|---|--|-----|
| Organization Name | RAB Lighting Inc. | |
| Brand Name | RAB Lighting | |
| Model Number | BRISK17FA30[blank,W] | |
| SKU (if available) | N/A | |
| Type of Luminaire (for integral lamps, list base type and lamp type) | Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires | |
| Rated Voltage / Frequency | 120-277Vac, 50/60 Hz | |
| Nominal Power | 30W | |
| Rated Initial Lamp Lumen | -- | |
| Declared CCT | 3000K,4000K,5000K(Color tunable) | |
| LED Manufacturer | Lumileds Holding B.V. | |
| LED Model | L128-3080RA35003H1 L128-5080RA35000H1 | |
| Sample Number | BLC2007001E-C1 | |
| Luminaire Aperture (for downlights) | -- | in. |
| Luminaire Length | -- | mm |
| Luminaires Width | -- | mm |
| Number of Units (modular products) | N/A | s |

Photo





1.2 Test Specifications:

| | |
|----------------------------|---|
| Date of Receipt | July 1, 2020 |
| Date of Test | July 2, 2020 |
| Test item | <ol style="list-style-type: none">1. Total Luminous Flux2. Luminous Distribution Intensity3. Luminous Efficacy4. Correlated Color Temperature5. Color Rendering Index6. Chromaticity Coordinate7. Electrical Parameters |
| Reference Standard | <ol style="list-style-type: none">1. IES LM-79-2008 Electrical and Photometric Measurements of Solid-State Lighting Products2. ANSI C78.377-2008 Specifications for the Chromaticity of Solid State Lighting Products3. CIE 13.3-1995 Method of Measuring and Specifying Colour Rendering Properties of Light Sources4. CIE 15-2004 Technical Report Colorimetry5. IESNA LM-16-93 Practical Guide to Colorimetry of Light Source6. IESNA TM-16-05 Technical Memorandum on Light Emitting Diode (LED) Sources and Systems |
| Reference Work Instruction | BL-QP-033 |

1.3 Test Methods

1) Photometric and Light Distribution Measurement – Goniophotometer Method:

Photometric parameters were measured using the goniophotometer and software. The ambient temperature shall be maintained at $25\text{ }^{\circ}\text{C} \pm 1\text{ }^{\circ}\text{C}$, measured at a point not more than 1 m from the sample and at the same height as the sample. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 1 ° vertical intervals and 22.5 ° horizontal intervals.

2) Chromaticity Measurement – Sphere-Spectroradiometer Method:

Chromaticity parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at $25\text{ }^{\circ}\text{C} \pm 1\text{ }^{\circ}\text{C}$. The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral power distribution taken at 5 nm intervals over the range of 380 to 780 nm.

3) Electrical Measurements:

Electrical parameters were measured using power meters incorporated in goniophotometer or sphere-spectroradiometer system. The ambient temperature surrounding the sample was maintained at $25\text{ }^{\circ}\text{C} \pm 1\text{ }^{\circ}\text{C}$. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Voltage, frequency, current, power, power factor and total harmonic distortion were measured by and read from the power meter.

**2.1 Electrical, Photometric and Chromaticity Measurements***(Refer to Work Instruction BL-QP-033)*

| | | | |
|-------------------------|--|---------------------------------|---------|
| Test date | 2020-07-02 | Test Ambient: | 25.2 °C |
| Test Orientation | As intended | Stabilization Time (min) | 90 |
| Model Number | BRISK17FA30(Tested at 0% CCT Setting) Tested at 0% CCT Setting) | | |

Electrical Measurement:

| Sample No. | Voltage (Vac) | Frequency (Hz) | Current (A) | Power (W) | Power Factor | THD % |
|--------------------------|---------------|----------------|-------------|-----------|--------------|-----------|
| BLC200700 | 120.0 | 60 | 0.2446 | 29.17 | 0.994 | 9.74 |
| 1E-C1 | 277.0 | 60 | 0.1103 | 28.48 | 0.932 | 12.83 |
| DLC Pass Criteria | | | | | >= 0.9(-3%) | <= 20(+5) |

Chromaticity Measurement - Sphere-Spectroradiometer Method:



| Parameter | Result | Special Color Rendering Indices | | | |
|-----------------------------|------------------------|---------------------------------|----|-----|----|
| Test Voltage (V) | 120.0 | R1 | 80 | R9 | 0 |
| Frequency (Hz) | 60 | R2 | 90 | R10 | 79 |
| CCT (K) | 2989 | R3 | 95 | R11 | 80 |
| Duv | -0.00253 | R4 | 80 | R12 | 75 |
| Chromaticity (x, y) | x=0.4340 y=0.3968 | R5 | 81 | R13 | 82 |
| Chromaticity (u', v') | u(u')=0.2519 v'=0.5181 | R6 | 89 | R14 | 98 |
| Color Rendering Index (CRI) | 81 | R7 | 80 | R15 | 72 |
| R9 | 0 | R8 | 55 | -- | -- |
| Rf | 83 | -- | -- | -- | -- |
| Rg | 97 | -- | -- | -- | -- |
| Rcs,h1 (%) | -12 | -- | -- | -- | -- |

Photometric Measurement – Goniophotometer Method:

| Parameter | Result | | DLC V5.1 Pass Criteria |
|---|--------|--------|------------------------|
| Test Voltage (V) | 120.0 | 277.0 | -- |
| Frequency (Hz) | 60 | 60 | |
| Total Luminous (lm) | 3947.0 | 3832.2 | 300-5000(-10%) |
| 0-90 °Total Luminous (lm) | 3568.5 | 3463.8 | |
| Luminous Efficacy (lm/W) | 135.31 | 134.56 | Premium: >= 120(-3%) |
| 0-90 °Luminous Efficacy (lm/W) | 122.33 | 121.62 | |
| Most worst Luminous/Highest | 131.38 | | |
| Zonal lumens in the 80-90 °0-90 °zone (%) | 5.43 | | <=10(+3) |
| Beam Angle (°) | 92 | -- | -- |
| Center Beam Candle Power (cd) | 1305 | -- | -- |



Spectral Power Distribution & Chromaticity Diagram

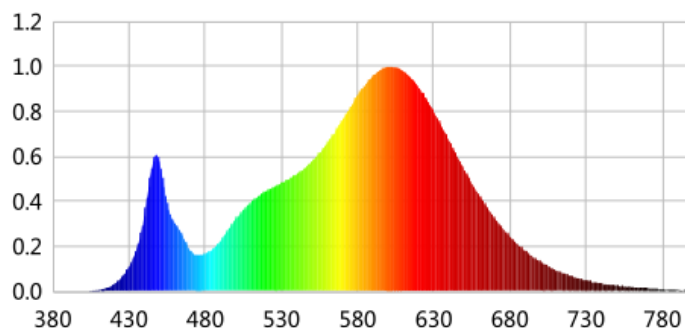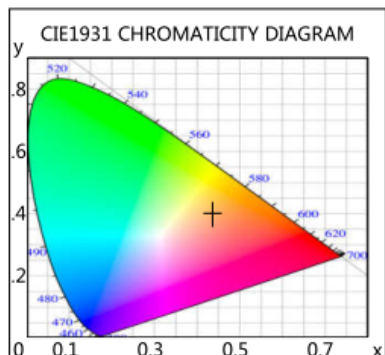

| WL(nm) | PL | PE(mW/nm) | WL(nm) | PL | PE(mW/nm) | WL(nm) | PL | PE(mW/nm) |
|--------|--------|-----------|--------|--------|-----------|--------|--------|-----------|
| 380 | 0.0003 | 0.0233 | 525 | 0.4642 | 39.2408 | 670 | 0.3260 | 27.5600 |
| 385 | 0.0002 | 0.0181 | 530 | 0.4822 | 40.7678 | 675 | 0.2818 | 23.8210 |
| 390 | 0.0004 | 0.0340 | 535 | 0.5012 | 42.3743 | 680 | 0.2443 | 20.6522 |
| 395 | 0.0008 | 0.0668 | 540 | 0.5226 | 44.1852 | 685 | 0.2084 | 17.6188 |
| 400 | 0.0011 | 0.0912 | 545 | 0.5464 | 46.1972 | 690 | 0.1818 | 15.3669 |
| 405 | 0.0023 | 0.1973 | 550 | 0.5791 | 48.9552 | 695 | 0.1543 | 13.0485 |
| 410 | 0.0058 | 0.4866 | 555 | 0.6157 | 52.0516 | 700 | 0.1314 | 11.1057 |
| 415 | 0.0142 | 1.1985 | 560 | 0.6579 | 55.6175 | 705 | 0.1122 | 9.4884 |
| 420 | 0.0305 | 2.5779 | 565 | 0.7070 | 59.7703 | 710 | 0.0943 | 7.9733 |
| 425 | 0.0597 | 5.0434 | 570 | 0.7615 | 64.3758 | 715 | 0.0808 | 6.8294 |
| 430 | 0.1084 | 9.1630 | 575 | 0.8160 | 68.9852 | 720 | 0.0688 | 5.8136 |
| 435 | 0.1868 | 15.7936 | 580 | 0.8713 | 73.6586 | 725 | 0.0582 | 4.9181 |
| 440 | 0.3314 | 28.0141 | 585 | 0.9171 | 77.5361 | 730 | 0.0488 | 4.1244 |
| 445 | 0.5477 | 46.3063 | 590 | 0.9592 | 81.0948 | 735 | 0.0402 | 3.3972 |
| 450 | 0.5789 | 48.9418 | 595 | 0.9852 | 83.2942 | 740 | 0.0366 | 3.0952 |
| 455 | 0.3961 | 33.4828 | 600 | 1.0000 | 84.5419 | 745 | 0.0324 | 2.7404 |
| 460 | 0.3061 | 25.8753 | 605 | 0.9959 | 84.1962 | 750 | 0.0271 | 2.2926 |
| 465 | 0.2516 | 21.2679 | 610 | 0.9789 | 82.7583 | 755 | 0.0218 | 1.8446 |
| 470 | 0.1844 | 15.5924 | 615 | 0.9493 | 80.2557 | 760 | 0.0189 | 1.5961 |
| 475 | 0.1620 | 13.6951 | 620 | 0.9085 | 76.8079 | 765 | 0.0150 | 1.2717 |
| 480 | 0.1686 | 14.2526 | 625 | 0.8581 | 72.5463 | 770 | 0.0140 | 1.1828 |
| 485 | 0.1887 | 15.9546 | 630 | 0.7990 | 67.5516 | 775 | 0.0117 | 0.9871 |
| 490 | 0.2249 | 19.0139 | 635 | 0.7362 | 62.2364 | 780 | 0.0078 | 0.6586 |
| 495 | 0.2736 | 23.1326 | 640 | 0.6710 | 56.7252 | 785 | 0.0061 | 0.5184 |
| 500 | 0.3207 | 27.1111 | 645 | 0.6054 | 51.1802 | 790 | 0.0093 | 0.7824 |
| 505 | 0.3605 | 30.4759 | 650 | 0.5414 | 45.7737 | 795 | 0.0055 | 0.4618 |
| 510 | 0.3965 | 33.5196 | 655 | 0.4816 | 40.7122 | 800 | 0.0042 | 0.3514 |
| 515 | 0.4239 | 35.8377 | 660 | 0.4248 | 35.9105 | | | |
| 520 | 0.4468 | 37.7720 | 665 | 0.3711 | 31.3709 | | | |



TM30







ANSI/IES TM-30-18 Color Rendition Report

Source: L128-3080RA35003H1
L128-5080RA35000H1

Date: 2020/7/2

Manufacturer: Organization Name AS MART LIGHT CO., LTD

Model: AST-MWP03C-30D4BYFDA1-ab30g (Tested at 0% CCT Setting)

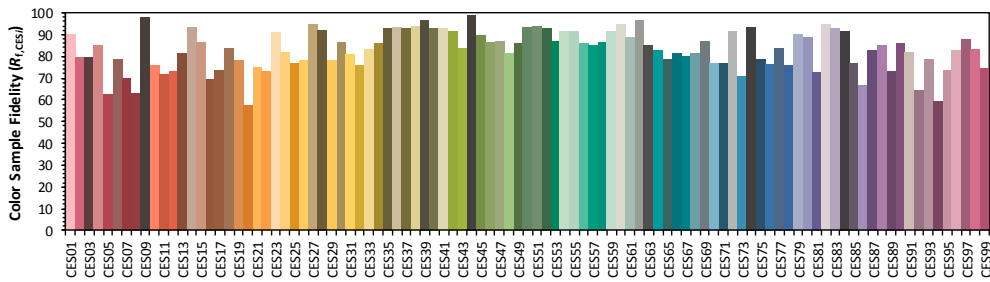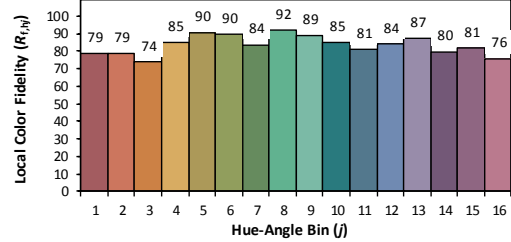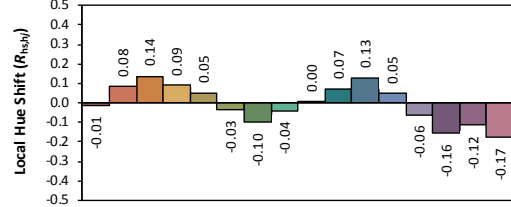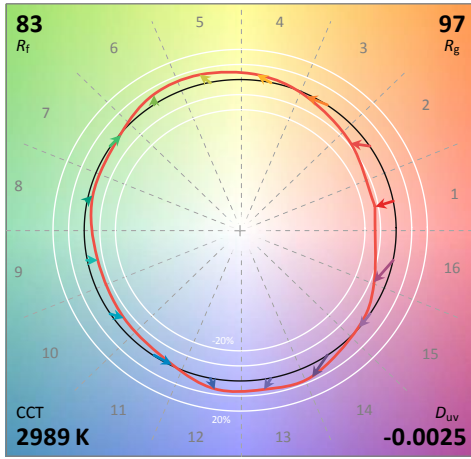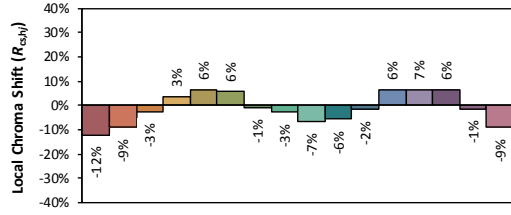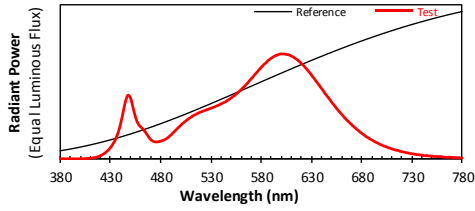

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.4340
 y 0.3968
 u' 0.2519
 v' 0.5181

CIE 13.3-1995 (CRI)
 R_a 81
 R_9 0

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.



Rcs,h1 (%)

| HUE-ANGLE BIN | LOCAL CHROMA SHIFT | LOCAL HUE SHIFT | LOCAL COLOR FIDELITY |
|---------------|--------------------|-----------------|----------------------|
| j | $R_{cs,hj}$ | $R_{hs,hj}$ | $R_{ct,hj}$ |
| 1 | -12% | -0.01 | 79 |
| 2 | -9% | 0.08 | 79 |
| 3 | -3% | 0.14 | 74 |
| 4 | 3% | 0.09 | 85 |
| 5 | 6% | 0.05 | 90 |
| 6 | 6% | -0.03 | 90 |
| 7 | -1% | -0.10 | 84 |
| 8 | -3% | -0.04 | 92 |
| 9 | -7% | 0.00 | 89 |
| 10 | -6% | 0.07 | 85 |
| 11 | -2% | 0.13 | 81 |
| 12 | 6% | 0.05 | 84 |
| 13 | 7% | -0.06 | 87 |
| 14 | 6% | -0.16 | 80 |
| 15 | -1% | -0.12 | 81 |
| 16 | -9% | -0.17 | 76 |



Zonal Lumen Tabulation

Zonal Lumen Summary


| Zone | Lumens | % Lamp | % Luminaires |
|--------|---------|--------|--------------|
| 0-30 | 1,006.6 | 25.5% | 25.5% |
| 0-40 | 1,576.4 | 39.9% | 39.9% |
| 0-60 | 2,635.7 | 66.8% | 66.8% |
| 60-90 | 932.8 | 23.6% | 23.6% |
| 70-100 | 636.4 | 16.1% | 16.1% |
| 90-120 | 298.2 | 7.6% | 7.6% |
| 0-90 | 3,568.5 | 90.4% | 90.4% |
| 90-180 | 378.3 | 9.6% | 9.6% |
| 0-180 | 3,946.8 | 100% | 100% |

Lumens Per Zone

| Zone | Lumens | % Total | Zone | Lumens | % Total |
|-------|--------|---------|---------|--------|---------|
| 0-10 | 130.0 | 3.3% | 90-100 | 131.8 | 3.3% |
| 10-20 | 364.3 | 9.2% | 100-110 | 99.7 | 2.5% |
| 20-30 | 512.3 | 13.0% | 110-120 | 66.7 | 1.7% |
| 30-40 | 569.8 | 14.4% | 120-130 | 37.8 | 1% |
| 40-50 | 549.3 | 13.9% | 130-140 | 21.5 | 0.5% |
| 50-60 | 509.9 | 12.9% | 140-150 | 12.1 | 0.3% |
| 60-70 | 428.2 | 10.8% | 150-160 | 6.0 | 0.2% |
| 70-80 | 310.9 | 7.9% | 160-170 | 2.2 | 0.1% |
| 80-90 | 193.8 | 4.9% | 170-180 | 0.5 | 0% |





Photometric Data

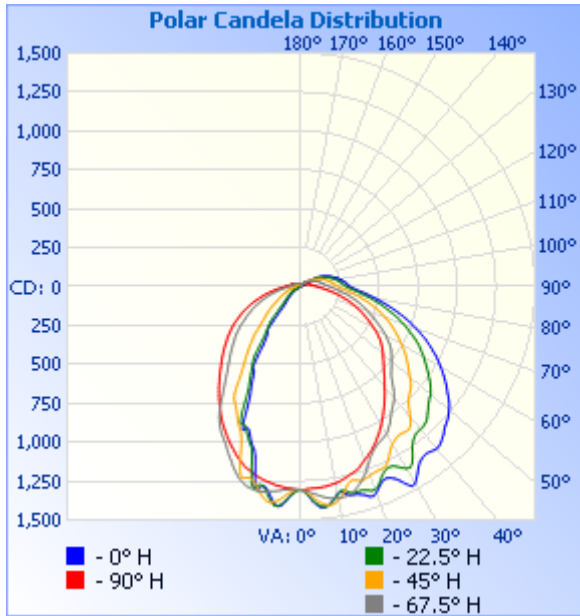

Illuminance at a Distance

| | Center Beam fc | Beam Width | |
|---------|----------------|------------|----------|
| 17.0ft | 4.52 fc | 39.2 ft | 35.2 ft |
| 34.0ft | 1.13 fc | 78.3 ft | 70.4 ft |
| 51.0ft | 0.50 fc | 117.5 ft | 105.6 ft |
| 68.0ft | 0.28 fc | 156.6 ft | 140.8 ft |
| 85.0ft | 0.18 fc | 195.8 ft | 176.1 ft |
| 102.0ft | 0.13 fc | 234.9 ft | 211.3 ft |

■ Vert. Spread: 98.1°
■ Horiz. Spread: 92.0°

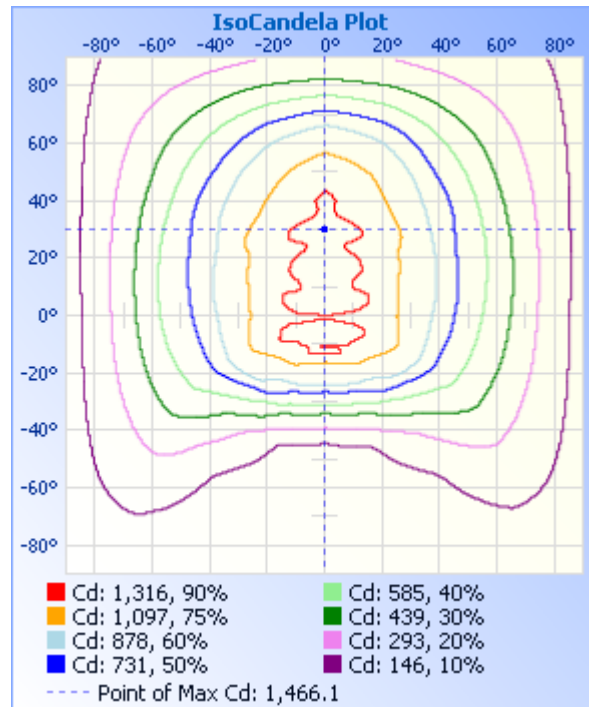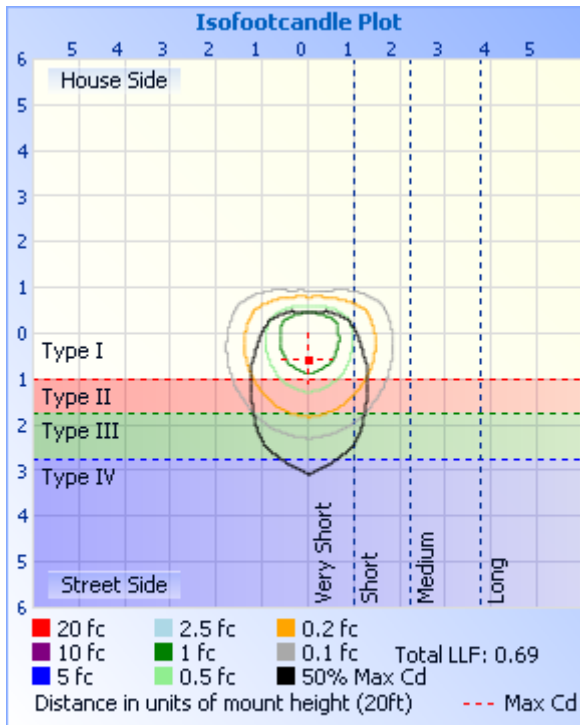



Candela Table - Type C

| | 0 | 22.5 | 45 | 67.5 | 90 | 112.5 | 135 | 157.5 | 180 | 202.5 | 225 | 247.5 | 270 | 292.5 | 315 | 337.5 | 360 |
|----|------|------|------|------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|------|
| 0 | 1305 | 1305 | 1305 | 1305 | 1305 | 1305 | 1305 | 1305 | 1305 | 1305 | 1305 | 1305 | 1305 | 1305 | 1305 | 1305 | 1305 |
| 1 | 1319 | 1320 | 1315 | 1312 | 1303 | 1302 | 1304 | 1308 | 1305 | 1310 | 1304 | 1302 | 1305 | 1306 | 1314 | 1316 | 1319 |
| 2 | 1345 | 1342 | 1332 | 1317 | 1300 | 1300 | 1314 | 1320 | 1325 | 1324 | 1312 | 1303 | 1302 | 1310 | 1328 | 1339 | 1345 |
| 3 | 1378 | 1369 | 1350 | 1330 | 1298 | 1301 | 1326 | 1347 | 1347 | 1346 | 1324 | 1304 | 1298 | 1316 | 1348 | 1373 | 1378 |
| 4 | 1402 | 1396 | 1372 | 1338 | 1297 | 1303 | 1344 | 1379 | 1380 | 1375 | 1340 | 1309 | 1298 | 1320 | 1367 | 1397 | 1402 |
| 5 | 1421 | 1414 | 1392 | 1349 | 1297 | 1310 | 1367 | 1406 | 1408 | 1399 | 1362 | 1311 | 1294 | 1329 | 1384 | 1417 | 1421 |
| 6 | 1427 | 1423 | 1404 | 1359 | 1295 | 1316 | 1386 | 1419 | 1420 | 1416 | 1380 | 1318 | 1289 | 1336 | 1401 | 1427 | 1427 |
| 7 | 1418 | 1420 | 1415 | 1367 | 1293 | 1323 | 1404 | 1420 | 1405 | 1416 | 1393 | 1323 | 1288 | 1347 | 1414 | 1427 | 1418 |
| 8 | 1398 | 1405 | 1416 | 1372 | 1289 | 1331 | 1413 | 1395 | 1374 | 1393 | 1401 | 1328 | 1281 | 1352 | 1415 | 1412 | 1398 |
| 9 | 1375 | 1381 | 1408 | 1378 | 1285 | 1336 | 1412 | 1361 | 1337 | 1359 | 1397 | 1331 | 1275 | 1357 | 1411 | 1387 | 1375 |
| 10 | 1350 | 1354 | 1393 | 1380 | 1281 | 1344 | 1393 | 1329 | 1310 | 1324 | 1381 | 1338 | 1271 | 1359 | 1400 | 1363 | 1350 |
| 11 | 1340 | 1336 | 1368 | 1379 | 1276 | 1350 | 1362 | 1307 | 1301 | 1302 | 1358 | 1341 | 1266 | 1363 | 1380 | 1343 | 1340 |
| 12 | 1359 | 1334 | 1341 | 1377 | 1269 | 1358 | 1335 | 1307 | 1338 | 1301 | 1328 | 1342 | 1258 | 1367 | 1358 | 1336 | 1359 |
| 13 | 1375 | 1356 | 1312 | 1371 | 1262 | 1361 | 1307 | 1342 | 1313 | 1332 | 1303 | 1340 | 1252 | 1363 | 1331 | 1349 | 1375 |
| 14 | 1378 | 1368 | 1291 | 1362 | 1253 | 1356 | 1288 | 1321 | 1220 | 1314 | 1282 | 1336 | 1242 | 1355 | 1307 | 1362 | 1378 |
| 15 | 1380 | 1365 | 1286 | 1347 | 1245 | 1352 | 1278 | 1230 | 1132 | 1232 | 1271 | 1331 | 1233 | 1343 | 1294 | 1367 | 1380 |
| 16 | 1389 | 1365 | 1294 | 1331 | 1238 | 1343 | 1289 | 1141 | 1090 | 1146 | 1276 | 1321 | 1223 | 1330 | 1290 | 1366 | 1389 |
| 17 | 1399 | 1366 | 1306 | 1311 | 1230 | 1329 | 1310 | 1090 | 1068 | 1086 | 1286 | 1308 | 1214 | 1315 | 1295 | 1368 | 1399 |
| 18 | 1418 | 1375 | 1305 | 1289 | 1217 | 1313 | 1296 | 1068 | 1043 | 1061 | 1265 | 1293 | 1202 | 1297 | 1297 | 1375 | 1418 |
| 19 | 1424 | 1386 | 1297 | 1267 | 1200 | 1291 | 1230 | 1046 | 1006 | 1035 | 1208 | 1271 | 1187 | 1270 | 1296 | 1386 | 1424 |
| 20 | 1409 | 1387 | 1292 | 1238 | 1188 | 1268 | 1146 | 1015 | 980 | 1010 | 1130 | 1249 | 1174 | 1247 | 1292 | 1390 | 1409 |
| 21 | 1387 | 1376 | 1285 | 1212 | 1177 | 1242 | 1085 | 987 | 970 | 985 | 1068 | 1227 | 1159 | 1223 | 1284 | 1381 | 1387 |
| 22 | 1366 | 1350 | 1281 | 1184 | 1160 | 1211 | 1045 | 970 | 994 | 962 | 1027 | 1203 | 1142 | 1199 | 1278 | 1359 | 1366 |
| 23 | 1351 | 1324 | 1281 | 1165 | 1149 | 1189 | 1016 | 972 | 952 | 958 | 1001 | 1182 | 1126 | 1177 | 1276 | 1333 | 1351 |
| 24 | 1347 | 1304 | 1281 | 1147 | 1131 | 1167 | 999 | 978 | 848 | 958 | 981 | 1159 | 1110 | 1155 | 1277 | 1309 | 1347 |
| 25 | 1356 | 1293 | 1277 | 1134 | 1118 | 1151 | 974 | 928 | 773 | 903 | 960 | 1134 | 1094 | 1135 | 1273 | 1295 | 1356 |
| 26 | 1373 | 1290 | 1259 | 1123 | 1099 | 1133 | 951 | 825 | 737 | 817 | 933 | 1114 | 1078 | 1116 | 1261 | 1286 | 1373 |
| 27 | 1400 | 1293 | 1236 | 1115 | 1081 | 1119 | 930 | 761 | 698 | 748 | 909 | 1097 | 1060 | 1099 | 1243 | 1287 | 1400 |
| 28 | 1436 | 1309 | 1210 | 1109 | 1065 | 1106 | 912 | 724 | 657 | 709 | 887 | 1078 | 1043 | 1082 | 1221 | 1299 | 1436 |
| 29 | 1466 | 1331 | 1188 | 1101 | 1043 | 1090 | 893 | 690 | 622 | 676 | 869 | 1062 | 1026 | 1069 | 1199 | 1315 | 1466 |



Report No.: BLC2007001E-C-R

Certificate#4810.01

| | | | | | | | | | | | | | | | | | |
|----|------|------|------|------|------|------|-----|-----|-----|-----|-----|------|------|------|------|------|------|
| 30 | 1463 | 1349 | 1167 | 1094 | 1027 | 1077 | 878 | 656 | 613 | 643 | 852 | 1040 | 1010 | 1058 | 1174 | 1337 | 1463 |
| 31 | 1437 | 1356 | 1158 | 1080 | 1006 | 1063 | 862 | 623 | 603 | 614 | 837 | 1017 | 991 | 1048 | 1156 | 1351 | 1437 |
| 32 | 1410 | 1343 | 1149 | 1062 | 988 | 1041 | 835 | 594 | 526 | 588 | 804 | 993 | 972 | 1035 | 1142 | 1343 | 1410 |
| 33 | 1382 | 1312 | 1143 | 1047 | 967 | 1013 | 783 | 570 | 448 | 564 | 755 | 962 | 952 | 1023 | 1132 | 1319 | 1382 |
| 34 | 1361 | 1278 | 1142 | 1024 | 948 | 971 | 728 | 542 | 408 | 530 | 702 | 927 | 934 | 1009 | 1124 | 1286 | 1361 |
| 35 | 1349 | 1245 | 1145 | 1006 | 930 | 933 | 682 | 475 | 383 | 470 | 661 | 894 | 913 | 993 | 1119 | 1257 | 1349 |
| 36 | 1342 | 1223 | 1148 | 987 | 909 | 894 | 648 | 414 | 367 | 418 | 630 | 857 | 895 | 979 | 1116 | 1235 | 1342 |
| 37 | 1340 | 1208 | 1148 | 973 | 889 | 858 | 624 | 384 | 359 | 384 | 601 | 827 | 877 | 964 | 1113 | 1216 | 1340 |
| 38 | 1346 | 1196 | 1137 | 959 | 871 | 828 | 597 | 363 | 345 | 359 | 576 | 796 | 857 | 951 | 1109 | 1202 | 1346 |
| 39 | 1352 | 1195 | 1117 | 945 | 851 | 800 | 568 | 344 | 287 | 340 | 550 | 770 | 839 | 935 | 1097 | 1196 | 1352 |
| 40 | 1357 | 1194 | 1087 | 928 | 833 | 778 | 537 | 324 | 231 | 321 | 525 | 746 | 818 | 917 | 1077 | 1195 | 1357 |
| 41 | 1353 | 1192 | 1060 | 908 | 815 | 757 | 510 | 302 | 194 | 302 | 499 | 722 | 799 | 900 | 1054 | 1194 | 1353 |
| 42 | 1343 | 1187 | 1030 | 885 | 800 | 739 | 484 | 272 | 170 | 276 | 476 | 703 | 782 | 882 | 1029 | 1192 | 1343 |
| 43 | 1328 | 1179 | 1012 | 861 | 783 | 717 | 460 | 231 | 155 | 237 | 454 | 685 | 765 | 860 | 1003 | 1186 | 1328 |
| 44 | 1317 | 1165 | 993 | 841 | 764 | 700 | 437 | 195 | 143 | 207 | 432 | 665 | 747 | 838 | 981 | 1176 | 1317 |
| 45 | 1298 | 1147 | 983 | 818 | 751 | 681 | 404 | 170 | 134 | 183 | 405 | 648 | 728 | 819 | 963 | 1164 | 1298 |
| 46 | 1287 | 1133 | 971 | 803 | 737 | 664 | 375 | 154 | 127 | 166 | 375 | 632 | 713 | 800 | 946 | 1149 | 1287 |
| 47 | 1277 | 1116 | 961 | 791 | 723 | 645 | 352 | 143 | 119 | 153 | 352 | 616 | 697 | 781 | 933 | 1136 | 1277 |
| 48 | 1266 | 1104 | 948 | 780 | 710 | 629 | 336 | 134 | 112 | 141 | 334 | 601 | 683 | 763 | 920 | 1122 | 1266 |
| 49 | 1253 | 1091 | 932 | 769 | 697 | 613 | 322 | 126 | 104 | 132 | 317 | 585 | 666 | 747 | 906 | 1111 | 1253 |
| 50 | 1238 | 1083 | 912 | 758 | 685 | 597 | 309 | 118 | 97 | 125 | 302 | 567 | 651 | 733 | 891 | 1100 | 1238 |
| 51 | 1224 | 1069 | 893 | 746 | 674 | 582 | 296 | 112 | 91 | 118 | 288 | 552 | 636 | 718 | 876 | 1087 | 1224 |
| 52 | 1205 | 1053 | 877 | 737 | 663 | 570 | 284 | 106 | 85 | 111 | 276 | 540 | 621 | 706 | 858 | 1075 | 1205 |
| 53 | 1184 | 1038 | 860 | 725 | 649 | 557 | 272 | 100 | 80 | 104 | 262 | 526 | 606 | 697 | 841 | 1057 | 1184 |
| 54 | 1160 | 1019 | 845 | 715 | 637 | 543 | 257 | 94 | 73 | 97 | 249 | 511 | 591 | 686 | 825 | 1041 | 1160 |
| 55 | 1141 | 999 | 829 | 705 | 626 | 532 | 242 | 87 | 69 | 92 | 234 | 495 | 578 | 674 | 810 | 1025 | 1141 |
| 56 | 1121 | 981 | 815 | 691 | 611 | 514 | 225 | 82 | 64 | 86 | 221 | 480 | 563 | 662 | 796 | 1005 | 1121 |
| 57 | 1100 | 963 | 798 | 676 | 595 | 497 | 210 | 77 | 59 | 80 | 209 | 464 | 549 | 648 | 780 | 984 | 1100 |
| 58 | 1078 | 944 | 781 | 658 | 579 | 482 | 198 | 72 | 54 | 75 | 197 | 447 | 535 | 634 | 763 | 966 | 1078 |
| 59 | 1057 | 924 | 763 | 643 | 562 | 465 | 188 | 67 | 50 | 70 | 187 | 431 | 520 | 617 | 747 | 950 | 1057 |
| 60 | 1035 | 909 | 747 | 628 | 544 | 449 | 177 | 63 | 46 | 65 | 177 | 416 | 506 | 604 | 729 | 929 | 1035 |
| 61 | 1012 | 892 | 726 | 611 | 526 | 434 | 170 | 59 | 43 | 61 | 167 | 403 | 492 | 587 | 712 | 910 | 1012 |

Laboratory: Belling Test Laboratory Co., LTD A2LA Certificate# 4810.01
Unit 401, No. 309 Xinxin Seven Road, Zengcheng District,
Guangzhou, People' s Republic of China. info@bellingtest.com

Report Format Number BL-FM-SA-012



Report No.: BLC2007001E-C-R

Certificate#4810.01

| | | | | | | | | | | | | | | | | | |
|----|-----|-----|-----|-----|-----|-----|-----|----|----|----|-----|-----|-----|-----|-----|-----|-----|
| 62 | 990 | 871 | 713 | 590 | 507 | 421 | 162 | 55 | 39 | 57 | 159 | 389 | 475 | 571 | 694 | 888 | 990 |
| 63 | 968 | 854 | 693 | 572 | 490 | 408 | 154 | 51 | 36 | 53 | 151 | 374 | 459 | 553 | 676 | 868 | 968 |
| 64 | 941 | 833 | 677 | 553 | 473 | 394 | 148 | 47 | 33 | 49 | 144 | 360 | 445 | 538 | 661 | 847 | 941 |
| 65 | 919 | 811 | 659 | 535 | 456 | 378 | 141 | 44 | 30 | 46 | 137 | 346 | 429 | 522 | 645 | 826 | 919 |
| 66 | 891 | 789 | 645 | 517 | 439 | 364 | 134 | 41 | 27 | 42 | 129 | 332 | 413 | 506 | 628 | 803 | 891 |
| 67 | 869 | 765 | 627 | 502 | 421 | 349 | 128 | 37 | 24 | 38 | 123 | 319 | 399 | 487 | 611 | 782 | 869 |
| 68 | 839 | 741 | 608 | 484 | 405 | 334 | 121 | 34 | 22 | 35 | 116 | 304 | 382 | 468 | 594 | 758 | 839 |
| 69 | 812 | 721 | 590 | 467 | 389 | 318 | 115 | 31 | 20 | 32 | 110 | 290 | 366 | 452 | 577 | 730 | 812 |
| 70 | 784 | 697 | 573 | 452 | 372 | 302 | 109 | 29 | 17 | 30 | 104 | 276 | 349 | 435 | 559 | 707 | 784 |
| 71 | 757 | 675 | 553 | 437 | 355 | 287 | 104 | 26 | 16 | 27 | 98 | 263 | 336 | 420 | 539 | 683 | 757 |
| 72 | 731 | 651 | 536 | 423 | 339 | 273 | 98 | 24 | 14 | 26 | 93 | 247 | 320 | 404 | 521 | 659 | 731 |
| 73 | 703 | 629 | 516 | 407 | 322 | 258 | 92 | 22 | 13 | 24 | 88 | 234 | 304 | 390 | 504 | 633 | 703 |
| 74 | 673 | 602 | 497 | 392 | 306 | 243 | 87 | 21 | 11 | 22 | 82 | 221 | 289 | 374 | 485 | 608 | 673 |
| 75 | 645 | 579 | 477 | 377 | 287 | 229 | 83 | 19 | 10 | 20 | 77 | 210 | 274 | 359 | 465 | 584 | 645 |
| 76 | 619 | 556 | 459 | 362 | 271 | 215 | 79 | 17 | 9 | 18 | 73 | 196 | 260 | 346 | 446 | 559 | 619 |
| 77 | 590 | 532 | 440 | 347 | 254 | 201 | 74 | 16 | 7 | 17 | 69 | 184 | 245 | 331 | 427 | 535 | 590 |
| 78 | 563 | 511 | 420 | 330 | 239 | 187 | 71 | 15 | 7 | 15 | 65 | 173 | 230 | 318 | 410 | 510 | 563 |
| 79 | 537 | 486 | 402 | 317 | 224 | 175 | 67 | 13 | 5 | 14 | 61 | 162 | 217 | 303 | 390 | 488 | 537 |
| 80 | 510 | 464 | 382 | 303 | 208 | 164 | 63 | 12 | 4 | 13 | 58 | 152 | 203 | 289 | 372 | 463 | 510 |
| 81 | 485 | 442 | 364 | 287 | 194 | 153 | 60 | 11 | 3 | 11 | 55 | 142 | 190 | 276 | 355 | 441 | 485 |
| 82 | 459 | 420 | 347 | 273 | 181 | 143 | 57 | 10 | 3 | 11 | 51 | 133 | 178 | 261 | 336 | 418 | 459 |
| 83 | 435 | 400 | 330 | 260 | 169 | 133 | 55 | 10 | 3 | 10 | 49 | 124 | 167 | 250 | 321 | 399 | 435 |
| 84 | 415 | 379 | 314 | 248 | 157 | 124 | 52 | 10 | 3 | 9 | 47 | 116 | 157 | 236 | 306 | 378 | 415 |
| 85 | 393 | 360 | 299 | 235 | 146 | 116 | 50 | 9 | 2 | 10 | 45 | 110 | 147 | 225 | 292 | 361 | 393 |
| 86 | 372 | 345 | 284 | 223 | 136 | 109 | 48 | 9 | 3 | 9 | 43 | 102 | 136 | 214 | 279 | 343 | 372 |
| 87 | 353 | 327 | 271 | 212 | 127 | 102 | 46 | 9 | 3 | 9 | 41 | 96 | 127 | 203 | 266 | 327 | 353 |
| 88 | 338 | 312 | 259 | 202 | 118 | 95 | 45 | 9 | 3 | 9 | 40 | 91 | 119 | 194 | 255 | 314 | 338 |
| 89 | 326 | 301 | 248 | 193 | 111 | 91 | 44 | 9 | 3 | 9 | 39 | 86 | 112 | 185 | 245 | 302 | 326 |
| 90 | 315 | 291 | 239 | 184 | 105 | 85 | 42 | 9 | 3 | 9 | 37 | 81 | 105 | 177 | 237 | 293 | 315 |
| 91 | 307 | 283 | 231 | 177 | 100 | 80 | 41 | 9 | 3 | 9 | 37 | 77 | 100 | 171 | 230 | 285 | 307 |
| 92 | 301 | 277 | 225 | 171 | 94 | 76 | 39 | 8 | 3 | 8 | 36 | 74 | 94 | 164 | 224 | 278 | 301 |
| 93 | 296 | 271 | 220 | 165 | 89 | 73 | 38 | 9 | 3 | 8 | 35 | 71 | 90 | 159 | 218 | 273 | 296 |

Laboratory: Belling Test Laboratory Co., LTD A2LA Certificate# 4810.01

Unit 401, No. 309 Xinxin Seven Road, Zengcheng District,
Guangzhou, People' s Republic of China. info@bellingtest.com

Report Format Number BL-FM-SA-012



Report No.: BLC2007001E-C-R

Certificate#4810.01

| | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|----|----|----|---|---|---|----|----|----|-----|-----|-----|-----|
| 94 | 292 | 267 | 215 | 159 | 85 | 69 | 37 | 7 | 3 | 8 | 33 | 68 | 85 | 154 | 214 | 268 | 292 |
| 95 | 287 | 263 | 210 | 154 | 81 | 67 | 36 | 7 | 3 | 9 | 33 | 65 | 82 | 149 | 210 | 264 | 287 |
| 96 | 283 | 258 | 205 | 151 | 78 | 64 | 35 | 8 | 2 | 8 | 33 | 63 | 79 | 146 | 205 | 260 | 283 |
| 97 | 277 | 253 | 201 | 146 | 74 | 61 | 34 | 8 | 3 | 8 | 31 | 60 | 76 | 141 | 201 | 254 | 277 |
| 98 | 271 | 247 | 197 | 143 | 72 | 59 | 34 | 8 | 3 | 7 | 31 | 58 | 73 | 137 | 196 | 249 | 271 |
| 99 | 266 | 242 | 192 | 138 | 69 | 57 | 33 | 8 | 3 | 8 | 30 | 57 | 71 | 134 | 193 | 244 | 266 |
| 100 | 260 | 236 | 188 | 135 | 67 | 56 | 32 | 8 | 3 | 8 | 30 | 55 | 69 | 131 | 188 | 239 | 260 |
| 101 | 254 | 231 | 183 | 132 | 66 | 54 | 32 | 8 | 3 | 8 | 29 | 54 | 67 | 128 | 183 | 233 | 254 |
| 102 | 248 | 225 | 179 | 128 | 64 | 53 | 31 | 8 | 3 | 8 | 30 | 53 | 65 | 125 | 180 | 227 | 248 |
| 103 | 241 | 219 | 175 | 125 | 62 | 52 | 30 | 7 | 4 | 8 | 29 | 51 | 63 | 122 | 175 | 221 | 241 |
| 104 | 236 | 213 | 171 | 122 | 60 | 51 | 30 | 8 | 3 | 8 | 28 | 50 | 62 | 119 | 171 | 215 | 236 |
| 105 | 228 | 207 | 166 | 119 | 59 | 50 | 30 | 8 | 3 | 8 | 28 | 49 | 60 | 115 | 167 | 209 | 228 |
| 106 | 221 | 201 | 162 | 115 | 58 | 49 | 29 | 8 | 3 | 8 | 27 | 48 | 59 | 112 | 163 | 202 | 221 |
| 107 | 214 | 195 | 159 | 112 | 57 | 48 | 29 | 7 | 3 | 7 | 27 | 48 | 58 | 109 | 158 | 196 | 214 |
| 108 | 207 | 189 | 154 | 109 | 55 | 47 | 28 | 7 | 3 | 7 | 27 | 47 | 57 | 106 | 153 | 189 | 207 |
| 109 | 200 | 183 | 150 | 106 | 54 | 47 | 28 | 7 | 4 | 8 | 26 | 46 | 56 | 103 | 149 | 183 | 200 |
| 110 | 193 | 177 | 145 | 103 | 51 | 46 | 28 | 7 | 3 | 7 | 26 | 46 | 54 | 100 | 144 | 176 | 193 |
| 111 | 187 | 170 | 140 | 100 | 45 | 46 | 27 | 7 | 4 | 7 | 25 | 45 | 49 | 97 | 139 | 170 | 187 |
| 112 | 179 | 163 | 136 | 97 | 39 | 45 | 27 | 7 | 4 | 7 | 25 | 44 | 41 | 94 | 134 | 163 | 179 |
| 113 | 173 | 157 | 131 | 94 | 33 | 44 | 27 | 7 | 4 | 7 | 25 | 44 | 34 | 92 | 130 | 157 | 173 |
| 114 | 167 | 151 | 126 | 90 | 28 | 44 | 26 | 7 | 3 | 7 | 24 | 43 | 28 | 89 | 124 | 150 | 167 |
| 115 | 159 | 144 | 120 | 88 | 27 | 43 | 26 | 7 | 4 | 7 | 24 | 43 | 23 | 86 | 118 | 144 | 159 |
| 116 | 152 | 137 | 114 | 85 | 27 | 43 | 26 | 6 | 4 | 7 | 23 | 42 | 21 | 84 | 113 | 137 | 152 |
| 117 | 144 | 130 | 109 | 83 | 26 | 42 | 25 | 7 | 3 | 7 | 23 | 42 | 21 | 82 | 108 | 129 | 144 |
| 118 | 137 | 122 | 103 | 80 | 25 | 42 | 25 | 6 | 4 | 7 | 23 | 41 | 21 | 79 | 103 | 122 | 137 |
| 119 | 129 | 115 | 98 | 78 | 25 | 41 | 25 | 6 | 4 | 7 | 22 | 41 | 21 | 77 | 98 | 114 | 129 |
| 120 | 121 | 107 | 93 | 76 | 24 | 41 | 24 | 6 | 4 | 6 | 22 | 40 | 21 | 75 | 93 | 107 | 121 |
| 121 | 112 | 100 | 89 | 74 | 24 | 40 | 24 | 6 | 4 | 6 | 22 | 40 | 21 | 73 | 89 | 99 | 112 |
| 122 | 95 | 92 | 84 | 71 | 24 | 39 | 23 | 6 | 4 | 7 | 22 | 39 | 21 | 71 | 84 | 93 | 95 |
| 123 | 79 | 85 | 80 | 69 | 23 | 39 | 23 | 6 | 4 | 7 | 22 | 38 | 21 | 68 | 81 | 85 | 79 |
| 124 | 68 | 79 | 77 | 67 | 23 | 38 | 23 | 6 | 4 | 6 | 21 | 38 | 20 | 66 | 77 | 78 | 68 |
| 125 | 60 | 71 | 73 | 65 | 22 | 37 | 22 | 6 | 3 | 7 | 21 | 37 | 20 | 64 | 73 | 73 | 60 |

Laboratory: Belling Test Laboratory Co., LTD A2LA Certificate# 4810.01
Unit 401, No. 309 Xinxin Seven Road, Zengcheng District,
Guangzhou, People' s Republic of China. info@bellingtest.com

Report Format Number BL-FM-SA-012



Report No.: BLC2007001E-C-R

Certificate#4810.01

| | | | | | | | | | | | | | | | | | |
|-----|----|----|----|----|----|----|----|---|---|---|----|----|----|----|----|----|----|
| 126 | 53 | 66 | 70 | 62 | 22 | 37 | 22 | 6 | 4 | 6 | 20 | 36 | 20 | 63 | 70 | 67 | 53 |
| 127 | 48 | 61 | 67 | 61 | 21 | 36 | 21 | 6 | 4 | 7 | 20 | 36 | 20 | 61 | 67 | 62 | 48 |
| 128 | 45 | 56 | 64 | 59 | 20 | 34 | 21 | 6 | 4 | 6 | 20 | 35 | 19 | 59 | 64 | 57 | 45 |
| 129 | 41 | 52 | 61 | 57 | 20 | 34 | 21 | 6 | 4 | 6 | 20 | 34 | 19 | 57 | 62 | 53 | 41 |
| 130 | 38 | 48 | 58 | 55 | 20 | 33 | 20 | 6 | 4 | 6 | 19 | 34 | 18 | 56 | 59 | 50 | 38 |
| 131 | 35 | 45 | 56 | 54 | 19 | 32 | 20 | 6 | 4 | 6 | 19 | 33 | 18 | 54 | 57 | 47 | 35 |
| 132 | 33 | 43 | 53 | 52 | 19 | 32 | 19 | 6 | 4 | 6 | 19 | 33 | 18 | 53 | 55 | 46 | 33 |
| 133 | 32 | 41 | 51 | 50 | 18 | 31 | 19 | 6 | 4 | 5 | 18 | 32 | 18 | 51 | 52 | 44 | 32 |
| 134 | 30 | 40 | 49 | 49 | 18 | 30 | 18 | 6 | 4 | 5 | 18 | 31 | 17 | 50 | 50 | 41 | 30 |
| 135 | 29 | 37 | 47 | 47 | 17 | 30 | 18 | 6 | 4 | 6 | 17 | 30 | 17 | 49 | 47 | 39 | 29 |
| 136 | 27 | 36 | 44 | 45 | 17 | 28 | 18 | 6 | 4 | 6 | 17 | 29 | 17 | 47 | 44 | 37 | 27 |
| 137 | 26 | 33 | 42 | 44 | 17 | 28 | 17 | 6 | 5 | 6 | 17 | 29 | 16 | 46 | 43 | 35 | 26 |
| 138 | 25 | 32 | 40 | 43 | 16 | 28 | 17 | 5 | 4 | 6 | 17 | 29 | 15 | 44 | 41 | 33 | 25 |
| 139 | 23 | 30 | 38 | 41 | 16 | 27 | 17 | 5 | 5 | 7 | 16 | 28 | 16 | 43 | 39 | 32 | 23 |
| 140 | 22 | 28 | 36 | 40 | 15 | 26 | 16 | 5 | 4 | 6 | 16 | 27 | 15 | 42 | 37 | 30 | 22 |
| 141 | 20 | 26 | 35 | 39 | 16 | 25 | 16 | 5 | 4 | 6 | 16 | 27 | 14 | 41 | 35 | 28 | 20 |
| 142 | 19 | 26 | 34 | 37 | 15 | 24 | 15 | 5 | 5 | 6 | 15 | 26 | 13 | 39 | 34 | 26 | 19 |
| 143 | 18 | 24 | 32 | 36 | 15 | 24 | 15 | 6 | 4 | 5 | 15 | 25 | 13 | 38 | 33 | 25 | 18 |
| 144 | 17 | 22 | 32 | 33 | 14 | 23 | 14 | 6 | 5 | 6 | 15 | 25 | 13 | 37 | 32 | 23 | 17 |
| 145 | 15 | 22 | 31 | 32 | 14 | 22 | 14 | 5 | 4 | 6 | 14 | 24 | 12 | 36 | 31 | 22 | 15 |
| 146 | 14 | 21 | 31 | 29 | 13 | 21 | 14 | 6 | 4 | 6 | 14 | 23 | 12 | 34 | 30 | 21 | 14 |
| 147 | 13 | 20 | 30 | 27 | 13 | 21 | 13 | 6 | 6 | 6 | 14 | 22 | 11 | 33 | 29 | 19 | 13 |
| 148 | 11 | 19 | 29 | 25 | 13 | 20 | 13 | 6 | 5 | 6 | 13 | 22 | 11 | 31 | 28 | 19 | 11 |
| 149 | 10 | 19 | 28 | 23 | 12 | 19 | 13 | 6 | 5 | 6 | 13 | 21 | 10 | 30 | 27 | 18 | 10 |
| 150 | 9 | 19 | 27 | 21 | 12 | 18 | 12 | 5 | 5 | 6 | 12 | 20 | 10 | 28 | 27 | 17 | 9 |
| 151 | 7 | 18 | 26 | 20 | 12 | 18 | 12 | 5 | 5 | 7 | 12 | 20 | 10 | 27 | 26 | 17 | 7 |
| 152 | 8 | 17 | 25 | 18 | 12 | 17 | 11 | 6 | 5 | 7 | 12 | 19 | 10 | 25 | 25 | 16 | 8 |
| 153 | 8 | 16 | 24 | 17 | 11 | 16 | 11 | 5 | 5 | 6 | 12 | 18 | 9 | 23 | 24 | 16 | 8 |
| 154 | 7 | 16 | 23 | 16 | 11 | 15 | 10 | 6 | 5 | 6 | 12 | 18 | 9 | 22 | 23 | 15 | 7 |
| 155 | 7 | 15 | 22 | 15 | 10 | 15 | 9 | 6 | 5 | 7 | 11 | 17 | 9 | 21 | 22 | 14 | 7 |
| 156 | 6 | 15 | 21 | 14 | 10 | 14 | 9 | 6 | 5 | 6 | 11 | 16 | 9 | 19 | 21 | 13 | 6 |
| 157 | 6 | 14 | 19 | 12 | 10 | 13 | 9 | 6 | 5 | 6 | 10 | 16 | 9 | 18 | 20 | 13 | 6 |

Laboratory: Belling Test Laboratory Co., LTD A2LA Certificate# 4810.01
Unit 401, No. 309 Xinxin Seven Road, Zengcheng District,
Guangzhou, People's Republic of China. info@bellingtest.com

Report Format Number BL-FM-SA-012



Report No.: BLC2007001E-C-R

| | | | | | | | | | | | | | | | | | |
|-----|---|----|----|----|---|----|---|---|---|---|----|----|---|----|----|----|---|
| 158 | 6 | 13 | 17 | 11 | 9 | 12 | 8 | 6 | 5 | 7 | 10 | 15 | 9 | 16 | 19 | 12 | 6 |
| 159 | 5 | 13 | 15 | 11 | 9 | 12 | 8 | 6 | 5 | 7 | 10 | 14 | 8 | 16 | 18 | 11 | 5 |
| 160 | 5 | 12 | 13 | 9 | 9 | 11 | 6 | 6 | 5 | 6 | 9 | 14 | 8 | 15 | 17 | 10 | 5 |
| 161 | 5 | 11 | 12 | 9 | 9 | 11 | 7 | 6 | 5 | 6 | 9 | 13 | 8 | 14 | 16 | 10 | 5 |
| 162 | 6 | 11 | 11 | 8 | 8 | 10 | 7 | 6 | 5 | 6 | 9 | 13 | 8 | 13 | 14 | 9 | 6 |
| 163 | 6 | 9 | 10 | 7 | 8 | 9 | 6 | 6 | 6 | 6 | 8 | 12 | 8 | 12 | 13 | 8 | 6 |
| 164 | 5 | 8 | 9 | 7 | 8 | 9 | 6 | 6 | 5 | 6 | 8 | 11 | 7 | 11 | 12 | 8 | 5 |
| 165 | 5 | 8 | 8 | 7 | 7 | 8 | 6 | 5 | 5 | 6 | 8 | 11 | 7 | 10 | 11 | 7 | 5 |
| 166 | 5 | 8 | 7 | 7 | 7 | 8 | 6 | 5 | 5 | 6 | 7 | 10 | 7 | 9 | 9 | 7 | 5 |
| 167 | 6 | 7 | 7 | 6 | 7 | 7 | 6 | 4 | 5 | 6 | 8 | 10 | 7 | 8 | 9 | 6 | 6 |
| 168 | 6 | 7 | 6 | 5 | 6 | 7 | 6 | 6 | 6 | 5 | 8 | 9 | 7 | 8 | 8 | 6 | 6 |
| 169 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 5 | 5 | 6 | 7 | 9 | 7 | 7 | 7 | 6 | 6 |
| 170 | 6 | 6 | 6 | 7 | 6 | 6 | 6 | 6 | 5 | 5 | 7 | 8 | 5 | 7 | 6 | 6 | 6 |
| 171 | 5 | 6 | 6 | 7 | 5 | 6 | 6 | 6 | 5 | 6 | 7 | 8 | 6 | 6 | 6 | 5 | 5 |
| 172 | 6 | 5 | 6 | 7 | 5 | 5 | 5 | 5 | 5 | 6 | 6 | 7 | 6 | 6 | 5 | 5 | 6 |
| 173 | 6 | 5 | 6 | 6 | 5 | 5 | 4 | 5 | 5 | 6 | 7 | 7 | 5 | 5 | 5 | 5 | 6 |
| 174 | 6 | 6 | 6 | 5 | 4 | 5 | 5 | 6 | 6 | 6 | 7 | 7 | 5 | 5 | 5 | 4 | 6 |
| 175 | 6 | 6 | 6 | 5 | 4 | 4 | 6 | 6 | 5 | 6 | 6 | 7 | 5 | 4 | 5 | 4 | 6 |
| 176 | 6 | 6 | 5 | 6 | 4 | 5 | 5 | 6 | 6 | 6 | 5 | 6 | 4 | 5 | 5 | 4 | 6 |
| 177 | 6 | 6 | 5 | 6 | 3 | 5 | 5 | 5 | 5 | 5 | 5 | 6 | 5 | 5 | 5 | 5 | 6 |
| 178 | 5 | 6 | 6 | 6 | 3 | 4 | 5 | 6 | 5 | 6 | 5 | 6 | 4 | 5 | 5 | 5 | 5 |
| 179 | 5 | 6 | 6 | 5 | 3 | 4 | 5 | 5 | 5 | 4 | 5 | 6 | 4 | 5 | 5 | 5 | 5 |
| 180 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |



Report No.: BLC2007001E-C-R

BUG

Lum. Classification System (LCS)

| <u>LCS Zone</u> | <u>Lumens</u> | <u>%Lamp</u> | <u>%Lum</u> |
|------------------------|----------------------|---------------------|--------------------|
| FL (0-30) | 540.4 | 13.7 | 13.7 |
| FM (30-60) | 1119.3 | 28.4 | 28.4 |
| FH (60-80) | 580.4 | 14.7 | 14.7 |
| FVH (80-90) | 159.7 | 4.0 | 4.0 |
| BL (0-30) | 466.3 | 11.8 | 11.8 |
| BM (30-60) | 510.1 | 12.9 | 12.9 |
| BH (60-80) | 158.6 | 4.0 | 4.0 |
| BVH(80-90) | 34.0 | 0.9 | 0.9 |
| UL (90-100) | 131.7 | 3.3 | 3.3 |
| UH (100-180) | 246.5 | 6.2 | 6.2 |
| Total | 3947.0 | 99.9 | 100.0 |
| BUG Rating | B1-U3-G2 | | |

**2.2 Electrical, Photometric and Chromaticity Measurements***(Refer to Work Instruction BL-QP-033)*

| | | | |
|-------------------------|--|---------------------------------|---------|
| Test date | 2020-07-02 | Test Ambient: | 25.2 °C |
| Test Orientation | As intended | Stabilization Time (min) | 90 |
| Model Number | BRISK17FA30 (Tested at 50% CCT Setting) | | |

Electrical Measurement:

| Sample No. | Voltage (Vac) | Frequency (Hz) | Current (A) | Power (W) | Power Factor | THD % | |
|--------------------------|---------------|----------------|-------------|-----------|--------------|-------------|-----------|
| BLC200700 | 120.0 | 60 | 0.2482 | 29.64 | 0.995 | 9.82 | |
| 1E-C1 | 277.0 | 60 | 0.1116 | 28.94 | 0.936 | 12.94 | |
| DLC Pass Criteria | | | | | | >= 0.9(-3%) | <= 20(+5) |

Chromaticity Measurement - Sphere-Spectroradiometer Method:


| Parameter | Result | Special Color Rendering Indices | | | |
|-----------------------------|----------------------------|---------------------------------|----|-----|----|
| Test Voltage (V) | 120.0 | R1 | 82 | R9 | 8 |
| Frequency (Hz) | 60 | R2 | 91 | R10 | 78 |
| CCT (K) | 3812 | R3 | 96 | R11 | 82 |
| Duv | -0.0025 | R4 | 82 | R12 | 66 |
| Chromaticity (x, y) | x=0.3871 y=0.3754 | R5 | 83 | R13 | 84 |
| Chromaticity (u', v') | u(u')=0.2300 v'(v')=0.5020 | R6 | 87 | R14 | 98 |
| Color Rendering Index (CRI) | 83 | R7 | 84 | R15 | 76 |
| R9 | 8 | R8 | 63 | -- | -- |
| Rf | 84 | -- | -- | -- | -- |
| Rg | 96 | -- | -- | -- | -- |
| Rcs,h1 (%) | -12 | -- | -- | -- | -- |

Photometric Measurement – Sphere-Spectroradiometer Method:

| Parameter | Result | | DLC V5.1 Pass Criteria |
|-----------------------------------|--------|--------|------------------------|
| Test Voltage (V) | 120.0 | 277.0 | -- |
| Frequency (Hz) | 60 | 60 | |
| Total Luminous (lm) | 4362.4 | 4235.6 | 300-5000(-10%) |
| Luminous Efficacy (lm/W) | 147.18 | 146.36 | Premium: >= 120(-3%) |
| Most worst Luminous/Highest Watts | 142.90 | | |



Spectral Power Distribution & Chromaticity Diagram

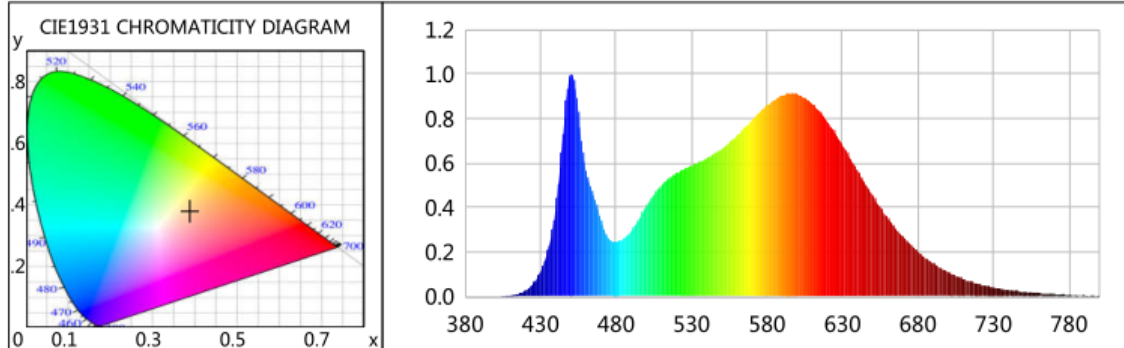

| WL(nm) | PL | PE(mW/nm) | WL(nm) | PL | PE(mW/nm) | WL(nm) | PL | PE(mW/nm) |
|--------|--------|-----------|--------|--------|-----------|--------|--------|-----------|
| 380 | 0.0000 | 0.0036 | 525 | 0.5714 | 48.4522 | 670 | 0.2690 | 22.8090 |
| 385 | 0.0006 | 0.0494 | 530 | 0.5888 | 49.9263 | 675 | 0.2349 | 19.9226 |
| 390 | 0.0009 | 0.0724 | 535 | 0.6050 | 51.2988 | 680 | 0.2024 | 17.1633 |
| 395 | 0.0009 | 0.0797 | 540 | 0.6207 | 52.6357 | 685 | 0.1724 | 14.6224 |
| 400 | 0.0007 | 0.0627 | 545 | 0.6401 | 54.2792 | 690 | 0.1497 | 12.6960 |
| 405 | 0.0025 | 0.2080 | 550 | 0.6632 | 56.2352 | 695 | 0.1273 | 10.7954 |
| 410 | 0.0046 | 0.3869 | 555 | 0.6919 | 58.6729 | 700 | 0.1093 | 9.2724 |
| 415 | 0.0117 | 0.9944 | 560 | 0.7226 | 61.2778 | 705 | 0.0922 | 7.8149 |
| 420 | 0.0265 | 2.2506 | 565 | 0.7574 | 64.2273 | 710 | 0.0781 | 6.6243 |
| 425 | 0.0566 | 4.8026 | 570 | 0.7907 | 67.0529 | 715 | 0.0656 | 5.5595 |
| 430 | 0.1119 | 9.4930 | 575 | 0.8272 | 70.1446 | 720 | 0.0565 | 4.7883 |
| 435 | 0.2089 | 17.7151 | 580 | 0.8607 | 72.9862 | 725 | 0.0482 | 4.0848 |
| 440 | 0.3901 | 33.0775 | 585 | 0.8844 | 74.9967 | 730 | 0.0405 | 3.4375 |
| 445 | 0.7294 | 61.8481 | 590 | 0.9061 | 76.8343 | 735 | 0.0334 | 2.8296 |
| 450 | 0.9998 | 84.7844 | 595 | 0.9106 | 77.2152 | 740 | 0.0297 | 2.5201 |
| 455 | 0.8320 | 70.5538 | 600 | 0.9101 | 77.1733 | 745 | 0.0259 | 2.1959 |
| 460 | 0.5687 | 48.2219 | 605 | 0.8941 | 75.8175 | 750 | 0.0216 | 1.8280 |
| 465 | 0.4577 | 38.8104 | 610 | 0.8660 | 73.4340 | 755 | 0.0195 | 1.6564 |
| 470 | 0.3440 | 29.1737 | 615 | 0.8327 | 70.6102 | 760 | 0.0162 | 1.3773 |
| 475 | 0.2633 | 22.3238 | 620 | 0.7865 | 66.6901 | 765 | 0.0125 | 1.0612 |
| 480 | 0.2465 | 20.9052 | 625 | 0.7359 | 62.4013 | 770 | 0.0119 | 1.0062 |
| 485 | 0.2604 | 22.0788 | 630 | 0.6794 | 57.6085 | 775 | 0.0107 | 0.9045 |
| 490 | 0.2923 | 24.7859 | 635 | 0.6207 | 52.6335 | 780 | 0.0061 | 0.5202 |
| 495 | 0.3472 | 29.4376 | 640 | 0.5650 | 47.9070 | 785 | 0.0053 | 0.4512 |
| 500 | 0.4049 | 34.3323 | 645 | 0.5075 | 43.0321 | 790 | 0.0085 | 0.7174 |
| 505 | 0.4535 | 38.4568 | 650 | 0.4516 | 38.2927 | 795 | 0.0056 | 0.4734 |
| 510 | 0.4985 | 42.2721 | 655 | 0.4020 | 34.0865 | 800 | 0.0038 | 0.3236 |
| 515 | 0.5311 | 45.0342 | 660 | 0.3513 | 29.7890 | | | |
| 520 | 0.5546 | 47.0313 | 665 | 0.3085 | 26.1641 | | | |



TM30







ANSI/IES TM-30-18 Color Rendition Report

Source: L128-3080RA35003H1
L128-5080RA35000H1

Date: 2020/7/2

Manufacturer: Organization Name AS MART LIGHT CO., LT

Model: AST-MWP03C-30D4BYFDA1-ab40g (Tested at 50% CCT Setting)

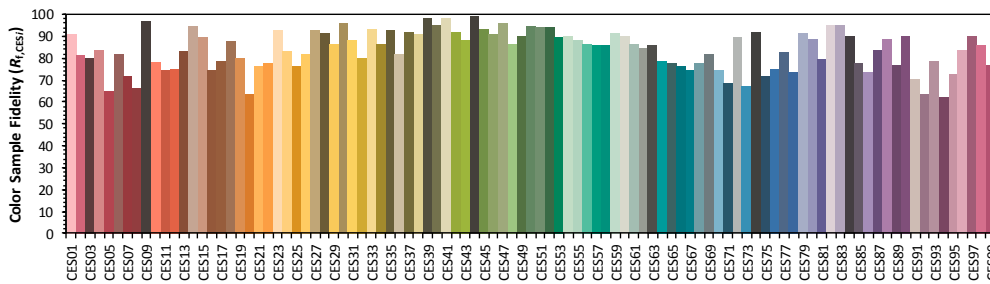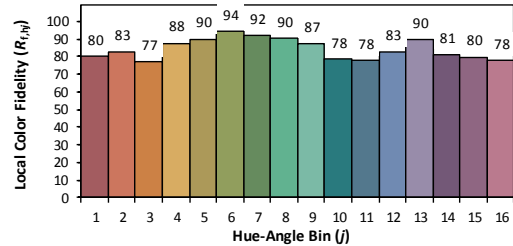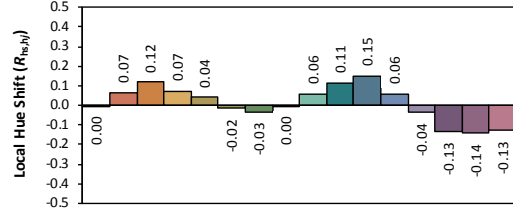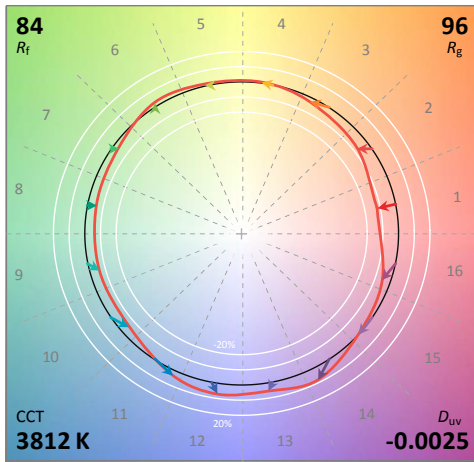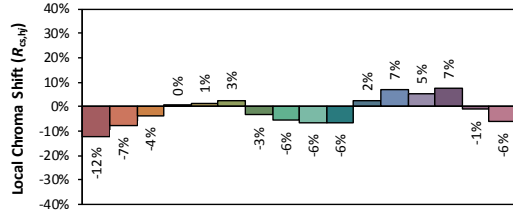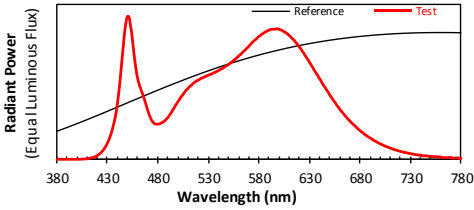

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.3871
 y 0.3754
 u' 0.2300
 v' 0.5020

| | |
|---------------------|----|
| CIE 13.3-1995 (CRI) | |
| R _a | 83 |
| R ₉ | 8 |

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.



Rcs,h1 (%)

| HUE-ANGLE BIN | LOCAL CHROMA SHIFT | LOCAL HUE SHIFT | LOCAL COLOR FIDELITY |
|---------------|--------------------|-----------------|----------------------|
| j | $R_{cs,hj}$ | $R_{hs,hj}$ | $R_{ct,hj}$ |
| 1 | -12% | 0.00 | 80 |
| 2 | -7% | 0.07 | 83 |
| 3 | -4% | 0.12 | 77 |
| 4 | 0% | 0.07 | 88 |
| 5 | 1% | 0.04 | 90 |
| 6 | 3% | -0.02 | 94 |
| 7 | -3% | -0.03 | 92 |
| 8 | -6% | 0.00 | 90 |
| 9 | -6% | 0.06 | 87 |
| 10 | -6% | 0.11 | 78 |
| 11 | 2% | 0.15 | 78 |
| 12 | 7% | 0.06 | 83 |
| 13 | 5% | -0.04 | 90 |
| 14 | 7% | -0.13 | 81 |
| 15 | -1% | -0.14 | 80 |
| 16 | -6% | -0.13 | 78 |

**2.3 Electrical, Photometric and Chromaticity Measurements***(Refer to Work Instruction BL-QP-033)*

| | | | |
|-------------------------|---|---------------------------------|---------|
| Test date | 2020-07-02 | Test Ambient: | 25.2 °C |
| Test Orientation | As intended | Stabilization Time (min) | 90 |
| Model Number | BRISK17FA30 (Tested at 100% CCT Setting) | | |

Electrical Measurement:

| Sample No. | Voltage (Vac) | Frequency (Hz) | Current (A) | Power (W) | Power Factor | THD % | |
|--------------------------|---------------|----------------|-------------|-----------|--------------|-------------|-----------|
| BLC200700 | 120.0 | 60 | 0.2563 | 30.57 | 0.994 | 10.03 | |
| 1E-C1 | 277.0 | 60 | 0.1154 | 29.85 | 0.934 | 13.17 | |
| DLC Pass Criteria | | | | | | >= 0.9(-3%) | <= 20(+5) |

Chromaticity Measurement - Sphere-Spectroradiometer Method:



| Parameter | Result | Special Color Rendering Indices | | | |
|-----------------------------|----------------------------|---------------------------------|----|-----|----|
| Test Voltage (V) | 120.0 | R1 | 79 | R9 | -6 |
| Frequency (Hz) | 60 | R2 | 87 | R10 | 69 |
| CCT (K) | 5118 | R3 | 93 | R11 | 80 |
| Duv | 0.00303 | R4 | 81 | R12 | 59 |
| Chromaticity (x, y) | x=0.3423 y=0.3554 | R5 | 80 | R13 | 81 |
| Chromaticity (u', v') | u(u')=0.2081 v'(v')=0.4861 | R6 | 82 | R14 | 96 |
| Color Rendering Index (CRI) | 81.0 | R7 | 85 | R15 | 73 |
| R9 | -6 | R8 | 63 | -- | -- |
| Rf | 82 | -- | -- | -- | -- |
| Rg | 95 | -- | -- | -- | -- |
| Rcs,h1 (%) | -14 | -- | -- | -- | -- |

Photometric Measurement – Sphere-Spectroradiometer Method:

| Parameter | Result | | DLC V5.1 Pass Criteria |
|-----------------------------------|--------|--------|------------------------|
| Test Voltage (V) | 120.0 | 277.0 | -- |
| Frequency (Hz) | 60 | 60 | |
| Total Luminous (lm) | 4207.0 | 4084.7 | 300-5000(-10%) |
| Luminous Efficacy (lm/W) | 137.62 | 136.86 | Premium: >= 120(-3%) |
| Most worst Luminous/Highest Watts | 133.62 | | |



Spectral Power Distribution & Chromaticity Diagram

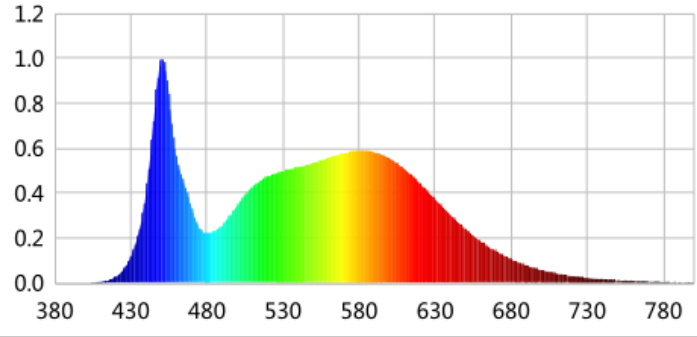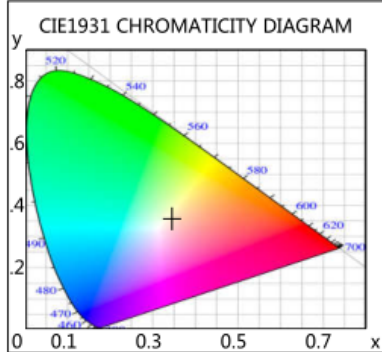

| WL(nm) | PL | PE(mW/nm) | WL(nm) | PL | PE(mW/nm) | WL(nm) | PL | PE(mW/nm) |
|--------|--------|-----------|--------|--------|-----------|--------|--------|-----------|
| 380 | 0.0002 | 0.0265 | 525 | 0.4886 | 56.1019 | 670 | 0.1418 | 16.2885 |
| 385 | 0.0006 | 0.0676 | 530 | 0.4969 | 57.0652 | 675 | 0.1228 | 14.1061 |
| 390 | 0.0006 | 0.0648 | 535 | 0.5070 | 58.2192 | 680 | 0.1069 | 12.2737 |
| 395 | 0.0007 | 0.0802 | 540 | 0.5148 | 59.1150 | 685 | 0.0904 | 10.3808 |
| 400 | 0.0008 | 0.0865 | 545 | 0.5242 | 60.1938 | 690 | 0.0792 | 9.0924 |
| 405 | 0.0022 | 0.2524 | 550 | 0.5350 | 61.4354 | 695 | 0.0672 | 7.7206 |
| 410 | 0.0046 | 0.5254 | 555 | 0.5456 | 62.6524 | 700 | 0.0572 | 6.5647 |
| 415 | 0.0119 | 1.3617 | 560 | 0.5579 | 64.0695 | 705 | 0.0481 | 5.5221 |
| 420 | 0.0274 | 3.1450 | 565 | 0.5677 | 65.1937 | 710 | 0.0414 | 4.7537 |
| 425 | 0.0576 | 6.6158 | 570 | 0.5781 | 66.3849 | 715 | 0.0349 | 4.0106 |
| 430 | 0.1155 | 13.2605 | 575 | 0.5861 | 67.2986 | 720 | 0.0301 | 3.4606 |
| 435 | 0.2169 | 24.9070 | 580 | 0.5891 | 67.6475 | 725 | 0.0263 | 3.0239 |
| 440 | 0.3970 | 45.5907 | 585 | 0.5874 | 67.4547 | 730 | 0.0227 | 2.6110 |
| 445 | 0.7190 | 82.5659 | 590 | 0.5833 | 66.9817 | 735 | 0.0180 | 2.0654 |
| 450 | 0.9959 | 114.3652 | 595 | 0.5715 | 65.6240 | 740 | 0.0173 | 1.9922 |
| 455 | 0.8438 | 96.8958 | 600 | 0.5558 | 63.8204 | 745 | 0.0144 | 1.6584 |
| 460 | 0.5650 | 64.8765 | 605 | 0.5335 | 61.2669 | 750 | 0.0130 | 1.4888 |
| 465 | 0.4438 | 50.9609 | 610 | 0.5055 | 58.0440 | 755 | 0.0114 | 1.3101 |
| 470 | 0.3346 | 38.4231 | 615 | 0.4760 | 54.6607 | 760 | 0.0089 | 1.0246 |
| 475 | 0.2479 | 28.4718 | 620 | 0.4426 | 50.8198 | 765 | 0.0064 | 0.7362 |
| 480 | 0.2230 | 25.6100 | 625 | 0.4085 | 46.9076 | 770 | 0.0074 | 0.8490 |
| 485 | 0.2313 | 26.5641 | 630 | 0.3736 | 42.9039 | 775 | 0.0057 | 0.6527 |
| 490 | 0.2548 | 29.2628 | 635 | 0.3381 | 38.8205 | 780 | 0.0044 | 0.5067 |
| 495 | 0.2989 | 34.3267 | 640 | 0.3035 | 34.8533 | 785 | 0.0021 | 0.2365 |
| 500 | 0.3485 | 40.0243 | 645 | 0.2706 | 31.0742 | 790 | 0.0049 | 0.5600 |
| 505 | 0.3914 | 44.9504 | 650 | 0.2401 | 27.5682 | 795 | 0.0020 | 0.2353 |
| 510 | 0.4286 | 49.2192 | 655 | 0.2116 | 24.2945 | 800 | 0.0022 | 0.2496 |
| 515 | 0.4551 | 52.2559 | 660 | 0.1858 | 21.3367 | | | |
| 520 | 0.4748 | 54.5184 | 665 | 0.1622 | 18.6274 | | | |



TM30







ANSI/IES TM-30-18 Color Rendition Report

Source: L128-3080RA35003H1
L128-5080RA35000H1

Date: 2020/7/2

Manufacturer: Organization Name ASmart
LIGHT CO., LTD

Model: AST-MWP03C-30D4BYFDA1-
ab50g (Tested at 100% CCT
Setting)

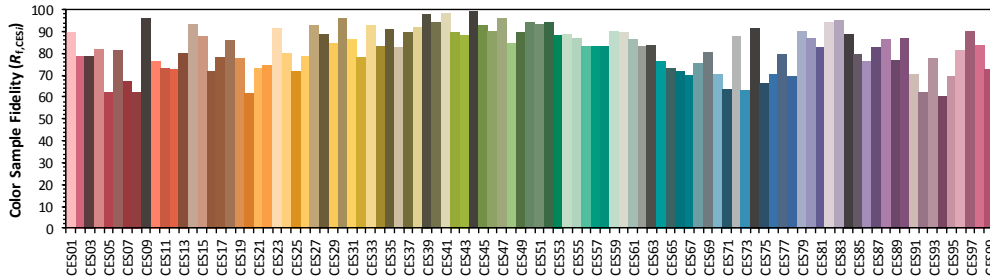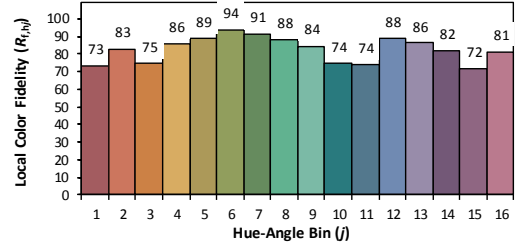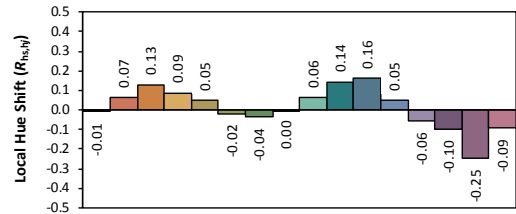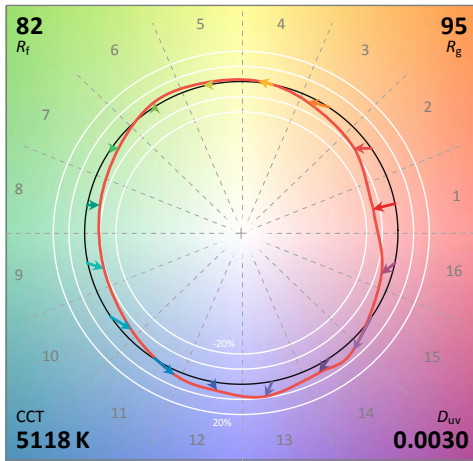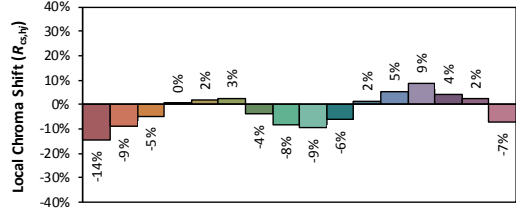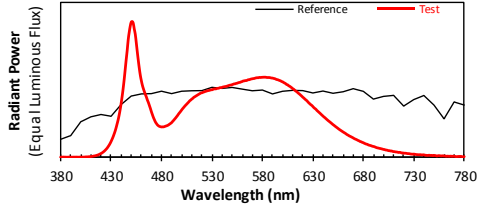

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.3423
 y 0.3554
 u' 0.2081
 v' 0.4861

CIE 13.3-1995 (CRI)
 R_a 81
 R_g -6

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.



Rcs,h1 (%)

| HUE-ANGLE BIN | LOCAL CHROMA SHIFT | LOCAL HUE SHIFT | LOCAL COLOR FIDELITY |
|---------------|--------------------|-----------------|----------------------|
| j | $R_{cs,hj}$ | $R_{hs,hj}$ | $R_{ct,hj}$ |
| 1 | -14% | -0.01 | 73 |
| 2 | -9% | 0.07 | 83 |
| 3 | -5% | 0.13 | 75 |
| 4 | 0% | 0.09 | 86 |
| 5 | 2% | 0.05 | 89 |
| 6 | 3% | -0.02 | 94 |
| 7 | -4% | -0.04 | 91 |
| 8 | -8% | 0.00 | 88 |
| 9 | -9% | 0.06 | 84 |
| 10 | -6% | 0.14 | 74 |
| 11 | 2% | 0.16 | 74 |
| 12 | 5% | 0.05 | 88 |
| 13 | 9% | -0.06 | 86 |
| 14 | 4% | -0.10 | 82 |
| 15 | 2% | -0.25 | 72 |
| 16 | -7% | -0.09 | 81 |



3. Test Equipment

| Equipment Name | Model No. | Serial No. | Next Calibration Date |
|---|-----------|-------------|-----------------------|
| Goniophotometric System | GPM-3000 | DYHXF120001 | 2021-01-13 |
| AC Power Source | CHP-500C | N/A | 2021-01-12 |
| Total Luminous Flux Standard Lamp | 24V/150W | DYJYR040040 | 2021-01-20 |
| Digital Power Meter | WT500 | DYDWQ200006 | 2021-01-12 |
| Integral Sphere (2M) | 2M | DYJCE120067 | 2021-01-13 |
| Digital Power Meter | WT500 | DYDWQ200006 | 2021-01-12 |
| Optical Color and Electrical Measurement System | CMS-3000S | DYJCE120067 | 2021-01-13 |

Expand Uncertainty:
Photometric Measurement (Sphere): 2.08%, k=2
Chromaticity Measurement(Sphere):25.6K, k=2
Photometric Measurement(Goniophotometer):2.645%, k=2

******* END OF REPORT *******