

# Original Data

## Relevant Standards

- IES LM-79-2008
- ANSI C82.77:2014

## Prepared For RAB lighting INC

408 W 14th St New York, NY 10014, USA (888) 722-1000

## Prepared By RAB lighting INC

408 W 14th St New York, NY 10014, USA (888) 722-1000

**Project Number**

**Data Number**

**Test Date**  
**2022/9/28**

## 1.0 Test List

Test Item	Test	Test Date	Model Number	Sample No.
1	Integrating Sphere Test	2022/9/28	PLC-9.5-O-835-HYB-G24C	A1
2	Goniophotometer Test	2022/9/28	PLC-9.5-O-835-HYB-G24C	A1
3	THD and PF Test	2022/9/28	PLC-9.5-O-835-HYB-G24C	A1

## 1.1 Test Summary

Requirement Category	Test Method	Requirements	Test value	
<b>Integrating Sphere system</b>				
Power (W)	IES LM-79-2008	9.5 ±10%	8.963	
Lamp Output for bare lamp (lm)	IES LM-79-2008	1250 ±10%	1266	
Lamp Efficacy (lm/W)	IES LM-79-2008	> 118.4	136.7	
Allowable CCTs* (K)	IES LM-79-2008	7 step	5029±283	
		4 step	5029±220	
		7 step	3985±275	
		4 step	3985±154	
		7 step	3465±245	3421
		4 step	3465±124	
		7 step	3045±175	
		4 step	3045±100	
		7 step	2725 ± 145	
		4 step	2725 ± 83	
CRI	IES LM-79-2008 CIE 13.3-1995	>80	81.7	
R9	IES LM-79-2008 CIE 13.3-1995	>0	6	
Rf	ANSI/IES TM-30-18	>70	83	
Rg	ANSI/IES TM-30-18	>89	95	
Rcs,h1	ANSI/IES TM-30-18	Rcs=>-12%,h1<=23%		
Power Factor	ANSI C82.77:2014	>0.9	0.91	
Total Harmonic Distortion (A%)	ANSI C82.77:2014	<25%	16.44%	
<b>Goniophotometer system</b>				
Lamp Output (lm)	IES LM-79-2008	1250 ±10%	1282.7	
Luminaire Efficacy(lm/W)	IES LM-79-2008	> 118.4	144.9	
Beam Angle	IES LM-79-2008		344.3	

## 2.0 Production Description

**Luminaire Description:** PLC-9.5-O-835-HYB-G24Q

**Electrical Specification:** 120V~277V,50/60HZ

**Light source:**

**Manufacturer Of Light Source:** Seoul Semiconductor Co.,LTD

### Photos of Luminaire Characteristics



### 3.0 LM-79 Measurement and Test Results

#### 3.1 Integrating Sphere Test

Model No.	PLC-9.5-O-835-HYB-G24Q	Sample ID.	A1
Opreate time (Min.)	15	Stabilization time (Min.)	15
Temperature (°C)	25.3	Humidity %	55

Test Method
<p>The samples were tested according to the IES LM-79-2008.</p> <p>Photometric paramters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at 25° C ± 1° C.</p> <p>The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.</p> <p>The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ±0.2 percent under load.</p> <p>The sample was measured using 4π geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.</p>

#### Test Conditions

Temperature (°C)	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	Flux (lm)	Efficacy (lm/W)
25.3	120.00	60.00	0.076	8.963	0.9828	1269.0	141.6
25.3	277.02	60.00	0.037	9.262	0.9064	1266.0	136.7


#### Test Result

Tc(K)	色差(Duv)	Rf	Rg	Ra	R9	SDCM
3421	2.0E-04	83	96	81.7	5.9	1.2
3423	2.0E-04	83	95	81.7	5.8	1.1

### 3.1 Integrating Sphere Test


#### Spectroradiometric Parameters

120V

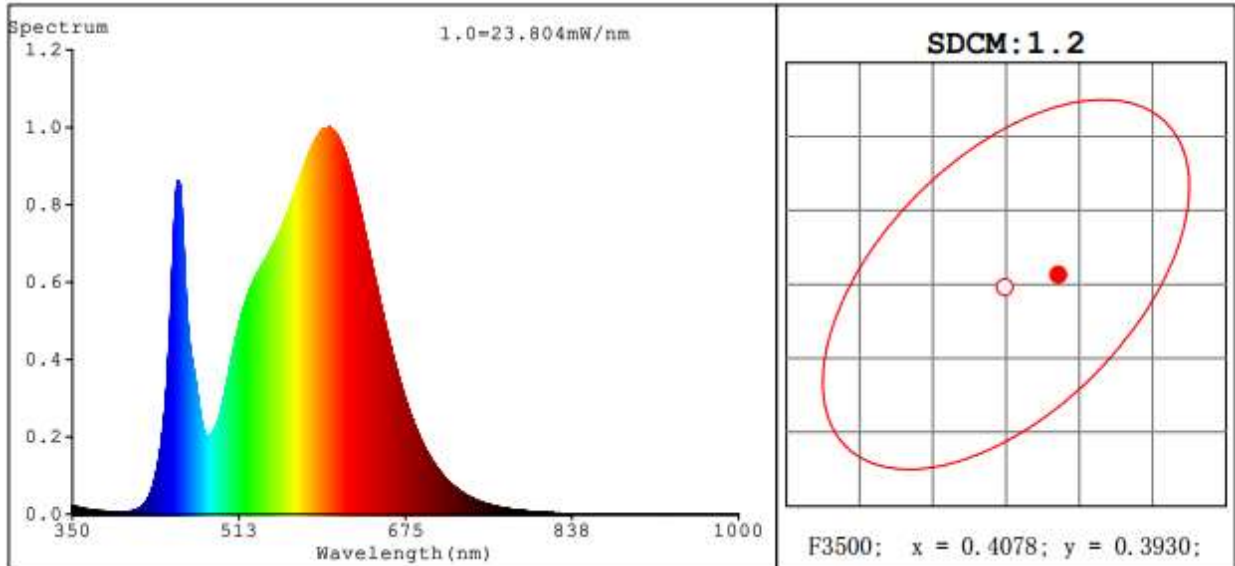


R1 =80.1 R2 =88.9 R3 =95.2 R4 =79.6 R5 =79.4 R6 =84.6 R7 =84.6  
R8 =61.3 R9 =5.9 R10=73.2 R11=77.6 R12=59.6 R13=82.2 R14=97.4 R15=73.8

277V

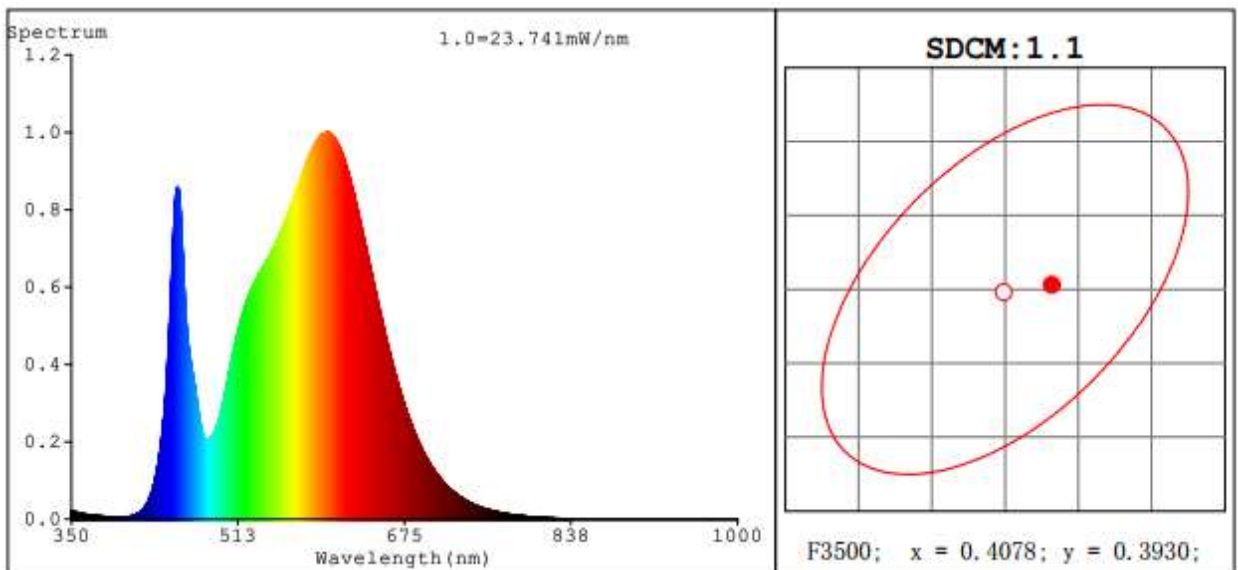

R1 =80.1 R2 =89.0 R3 =95.3 R4 =79.5 R5 =79.4 R6 =84.7 R7 =84.6  
R8 =61.2 R9 =5.8 R10=73.3 R11=77.5 R12=59.7 R13=82.2 R14=97.4 R15=73.8

### 3.2 Integrating Sphere Test - Minimum CCT

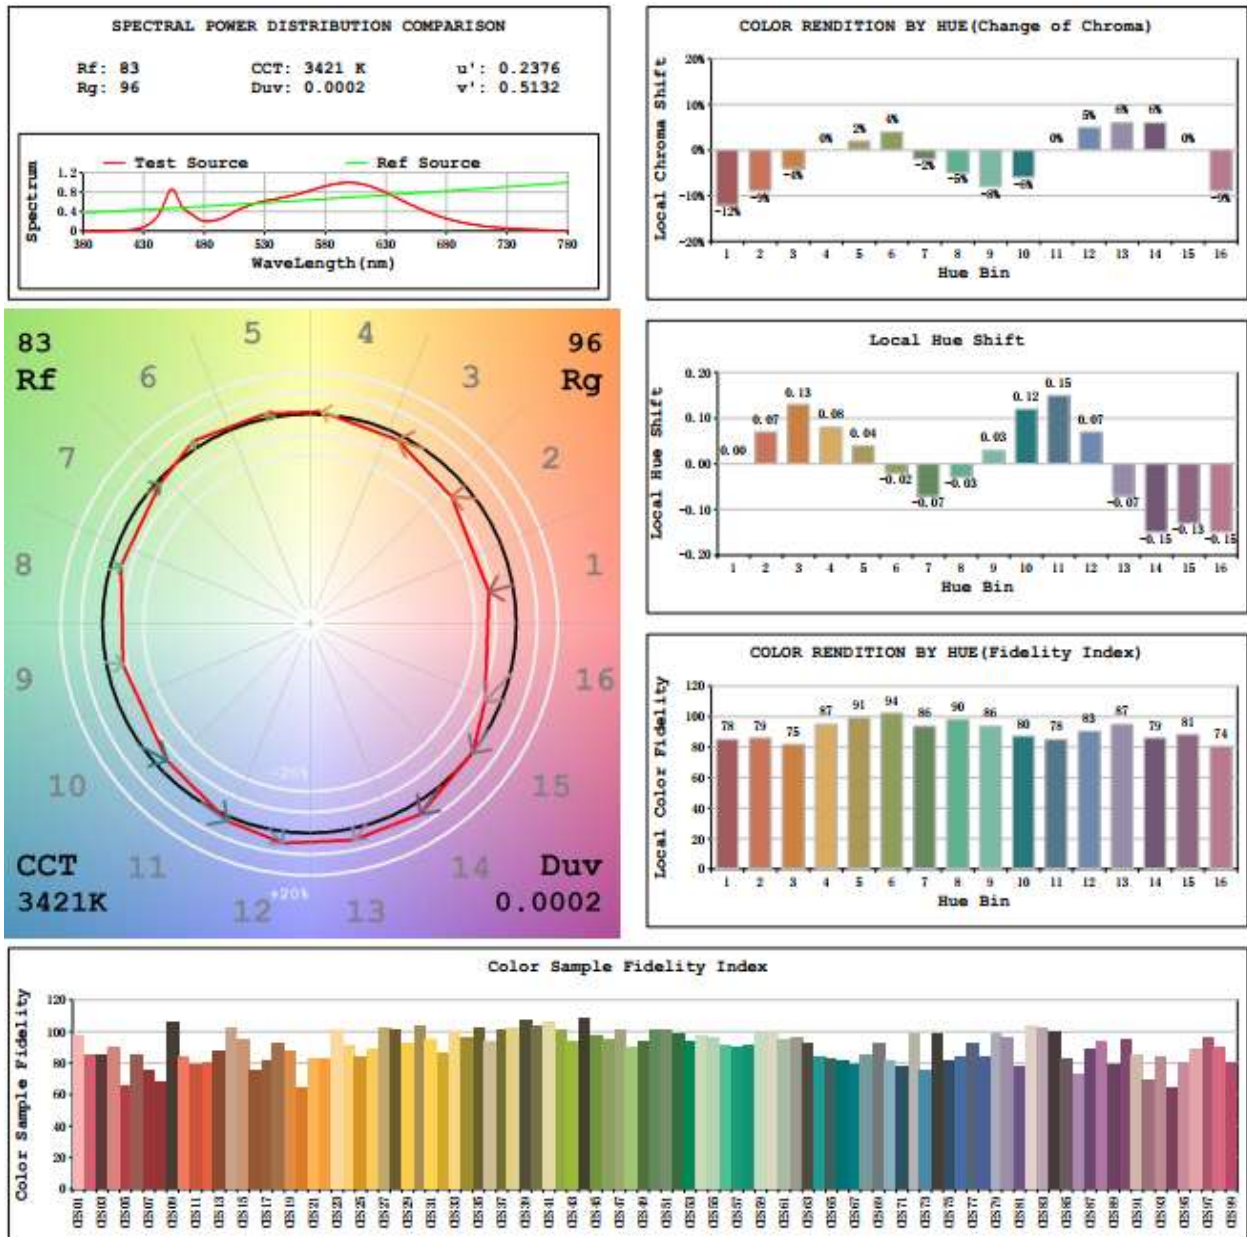

### 3.3 Goniophotometer Test

Model No.	PLC-9.5-O-835-HYB-G24Q	Sample ID.	0
Operate time (Min.)	15	Stabilization time (Min.)	15

#### Test Method

The samples were tested according to the IES LM-79-2008. Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at 25° C + 1° C. The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.

The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 0.5o vertical intervals and 10o horizontal intervals.

#### Test Conditions


Temperature (°C)	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
25.3	120.00	60.00	0.075	8.9	0.982

#### Test Result

Flux(lm)	Beam Angle	Zonal Lumen Requirement(0°-60°)	SC (0°-180°)	SC (90°-270°)	Efficacy (lm/W)
1282.7	344.3	18.9%	0.16	0.21	144.9

### 3.3 Goniophotometer Test

#### Light Distribution Curve

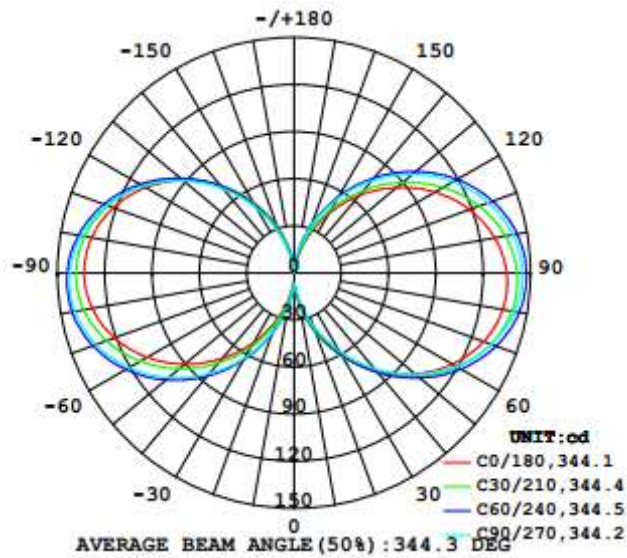

#### Zonal Lumen Summary

Zone	Lumens	%Lamp	%Fixt	Zone	Lumens
0-20	9.17	N.A.	0.70	0-10	1.23
0-30	31.53	N.A.	2.50	10-20	7.94
0-40	75.18	N.A.	5.90	20-30	22.36
0-60	242.20	N.A.	18.90	30-40	43.64
0-80	507.12	N.A.	39.50	40-50	69.66
0-90	658.96	N.A.	51.40	50-60	97.36
10-90	657.73	N.A.	51.30	60-70	122.84
20-40	66.00	N.A.	5.10	70-80	142.08
20-50	135.67	N.A.	10.60	80-90	151.84
40-70	289.86	N.A.	22.60	90-100	150.42
60-80	264.93	N.A.	20.70	100-110	138.27
70-80	142.08	N.A.	11.10	110-120	117.48
80-90	151.84	N.A.	11.80	120-130	91.32
90-110	288.70	N.A.	22.50	130-140	63.72
90-120	406.18	N.A.	31.70	140-150	38.42
90-130	497.50	N.A.	38.80	150-160	18.29
90-150	599.64	N.A.	46.80	160-170	5.41
90-180	623.69	N.A.	48.60	170-180	0.35
110-180	334.99	N.A.	26.10		
0-180	1282.65	N.A.	100.00		

## 5.0 THD and PF Test

Model No.	PLC-9.5-O-835-HYB-G24Q	Sample ID.	A1
Temperature (°C)	25.3	Humidity %	49

Test Method
<p>The samples were tested according to the ANSI C82.77:2002.</p> <p>The total harmonic distortion shall be measured to the 40th order.</p> <p>The ambient temperature condition was maintained at 25° C ± 1° C. The sample measurements were made using a digital power meter and power supply. The sample was operated at rated voltage and was stabilized before measurement. The total harmonic distortion were calculated.</p>

### Test Results

Temperature (°C)	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	THD
25.3	120.00	60.00	0.076	9.0	0.983	16.44%
25.3	277.02	60.00	0.037	9.3	0.906	15.20%