

Original Data

Relevant Standards

- IES LM-79-2019
- ANSI C82.77:2014

Prepared For

RAB lighting INC

408 W 14th St New York, NY 10014 United States

Prepared By

RAB lighting INC

Project Number

2025060301

Data Number

2025/6/3

Test Date

2025/6/3

1.0 Test List

Test Item	Test	Test Date	Model Number	Sample No.
1	Integrating Sphere Test	2025/6/3	PLT-9-O-8FA-BYP	A1
2	Goniophotometer Test	2025/6/3	PLT-9-O-8FA-BYP	A1
3	THD and PF Test	2025/6/3	PLT-9-O-8FA-BYP	A1

1.1 Test Summary

Requirement Category	Test Method	Requirements	Test value
Integrating Sphere system			
Power (W)	IES LM-79-2008	9 ±10%	8.52
Lamp Output for bare lamp (lm)	IES LM-79-2008	1050 ±10%	1106
Lamp Efficacy (lm/W)	IES LM-79-2008	> 105.0	124.94
Allowable CCTs* (K)	IES LM-79-2019	4 step	2725 ± 83
		7 step	2725 ± 145
		4 step	3045±100
		7 step	3045±175
		4 step	3465±124
		7 step	3465±245
		4 step	3985±154
		7 step	3985±275
		4 step	5029±220
		7 step	5029±283
		4 step	6532±340
		7 step	6532±510
CRI	IES LM-79-2019 CIE 13.3-1995	>80	82.50
R9	IES LM-79-2019 CIE 13.3-1995	>0	6.10
Rf	ANSI/IES TM-30-18	>70	82.00
Rg	ANSI/IES TM-30-18	>89	96.00
Rcs,h1	ANSI/IES TM-30-18	Rcs=>-12%,h1<=23%	-12.00%
Power Factor	ANSI C82.77:2014	>0.9	0.90
Total Harmonic Distortion (A%)	ANSI C82.77:2014	<25%	19.30%
Goniophotometer system			

Lamp Output (lm)	IES LM-79-2019	1050 ±10%	1224.9
Luminaire Efficacy(lm/W)	IES LM-79-2019	> 105.0	139.9
Beam Angle	IES LM-79-2019		339.3

2.0 Production Description

Luminaire Description: PLT-9-O-8FA-BYP

Electrical Specification: 120V~277V,50/60HZ

Light source:

Manufacturer Of Light Source: Seoul Semiconductor Co.,LTD

Photos of Luminaire Characteristics



3.0 LM-79 Measurement and Test Results

3.1 Integrating Sphere Test

Model No.	PLT-9-O-8FA-BYP	Sample ID.	A1
Opreate time (Min.)	15	Stabilization time (Min.)	15
Temperature (°C)	25.3	Humidity %	55

Test Method
<p>The samples were tested according to the IES LM-79-2008.</p> <p>Photometric paramters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at 25° C ± 1° C.</p> <p>The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.</p> <p>The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ±0.2 percent under load.</p> <p>The sample was measured using 4π geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.</p>

Test Conditions

Temperature (°C)	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	Flux (lm)	Efficacy (lm/W)
25.3	120.00	60.00	0.073	8.685	0.9875	1106.0	127.3
25.3	277.02	60.00	0.036	8.876	0.8952	1109.0	124.9


Test Result

Tc(K)	色差(Duv)	Rf	Rg	Ra	R9	SDCM
3027	-2.0E-03	83	96	82.5	6.1	2.6
3027	-2.0E-03	83	96	82.5	6.2	2.6

3.1 Integrating Sphere Test


Spectroradiometric Parameters

120V

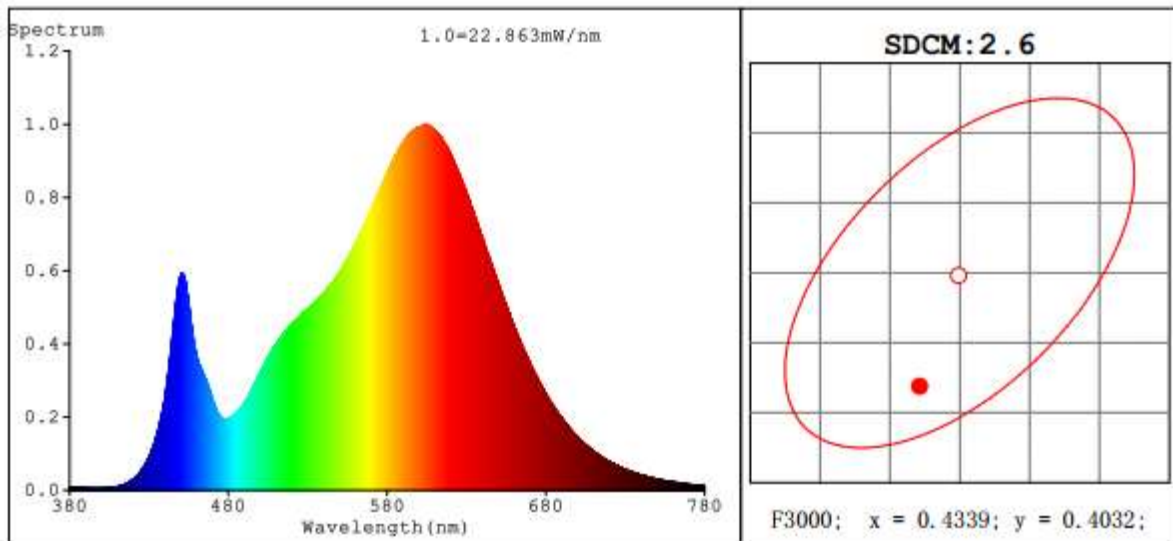

R1 =81.3 R2 =91.6 R3 =95.4 R4 =80.3 R5 =81.7 R6 =89.8 R7 =81.7
R8 =58.2 R9 =6.1 R10=80.9 R11=79.8 R12=73.6 R13=83.8 R14=98.3 R15=73.9


277V

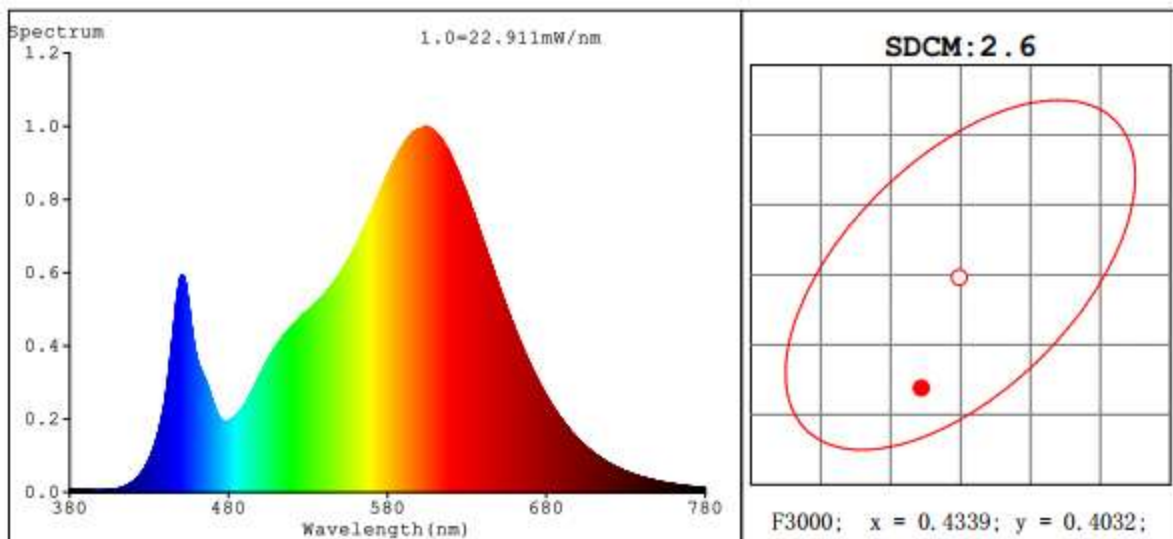

R1 =81.2 R2 =91.6 R3 =95.5 R4 =80.4 R5 =81.8 R6 =89.8 R7 =81.7

R8 =58.1 R9 =6.2 R10=80.9 R11=79.9 R12=73.6 R13=83.8 R14=98.3 R15=73.9

3.2 Integrating Sphere Test - Minimum CCT

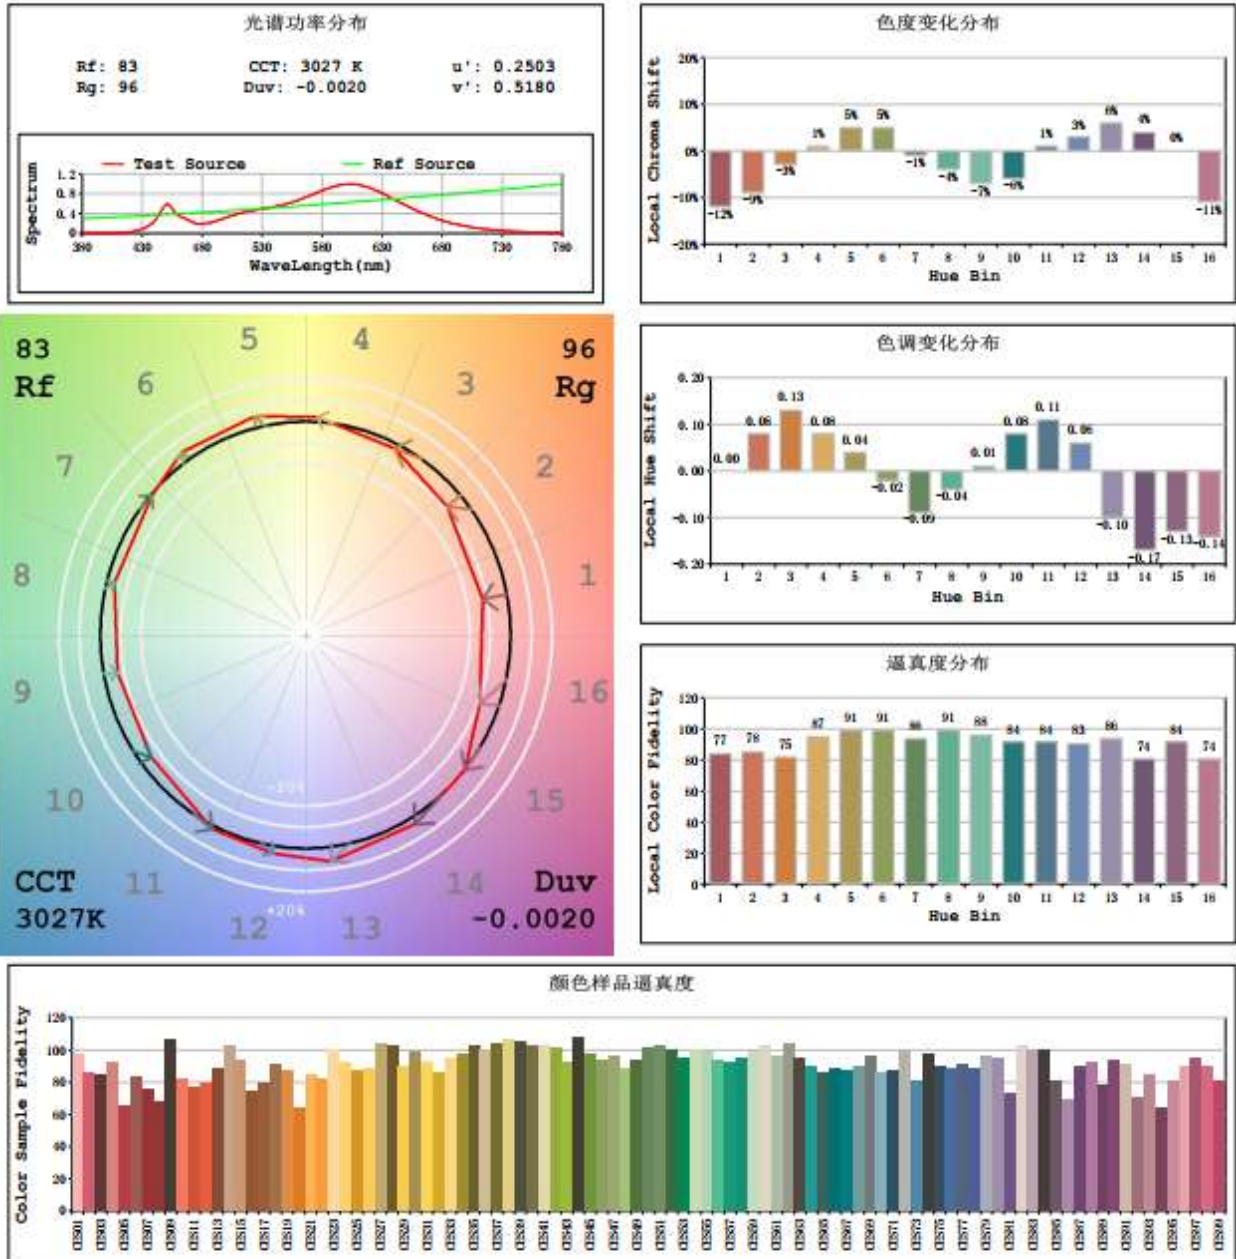

3.0 LM-79 Measurement and Test Results

3.1 Integrating Sphere Test

Model No.	PLT-9-O-8FA-BYP	Sample ID.	A1
Opreate time (Min.)	15	Stabilization time (Min.)	15
Temperature (°C)	25.3	Humidity %	55

Test Method
<p>The samples were tested according to the IES LM-79-2008.</p> <p>Photometric paramters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at 25° C ± 1° C.</p> <p>The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.</p> <p>The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ±0.2 percent under load.</p> <p>The sample was measured using 4π geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.</p>

Test Conditions

Temperature (°C)	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	Flux (lm)	Efficacy (lm/W)
25.3	120.00	60.00	0.072	8.570	0.9877	1137.0	132.7
25.3	277.02	60.00	0.035	8.805	0.8958	1142.0	129.7


Test Result

Tc(K)	色差(Duv)	Rf	Rg	Ra	R9	SDCM
3397	-3.1E-03	84	97	84.1	13.2	4.3
3398	-3.1E-03	84	97	84.2	13.3	4.3

3.1 Integrating Sphere Test


Spectroradiometric Parameters

120V

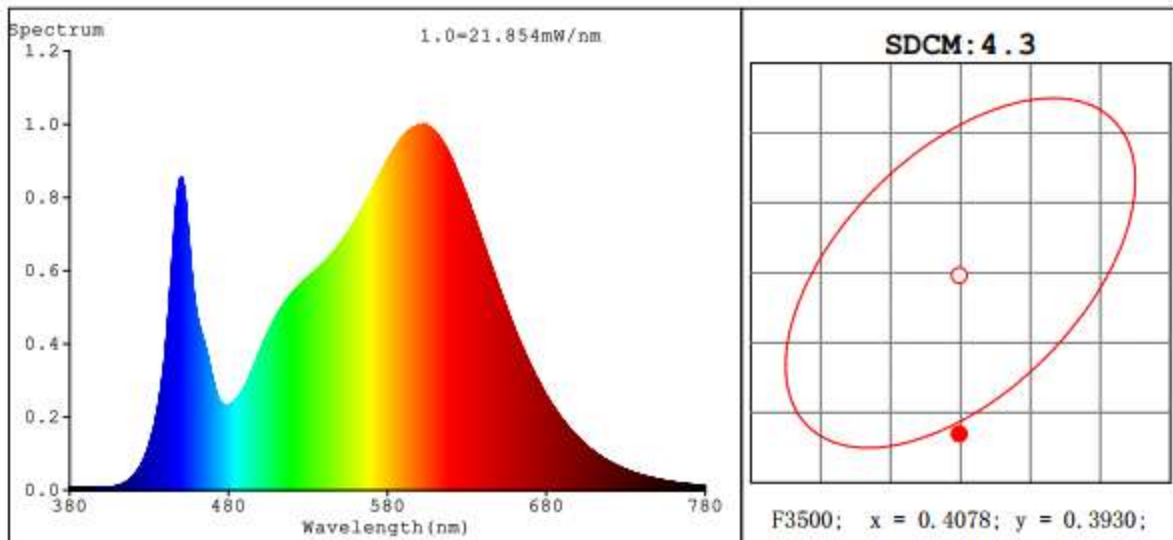

R1 =83.2 R2 =91.6 R3 =96.0 R4 =82.7 R5 =83.5 R6 =88.8 R7 =84.1
 R8 =63.2 R9 =13.2 R10=80.2 R11=82.3 R12=71.1 R13=85.4 R14=98.4 R15=77.0


277V

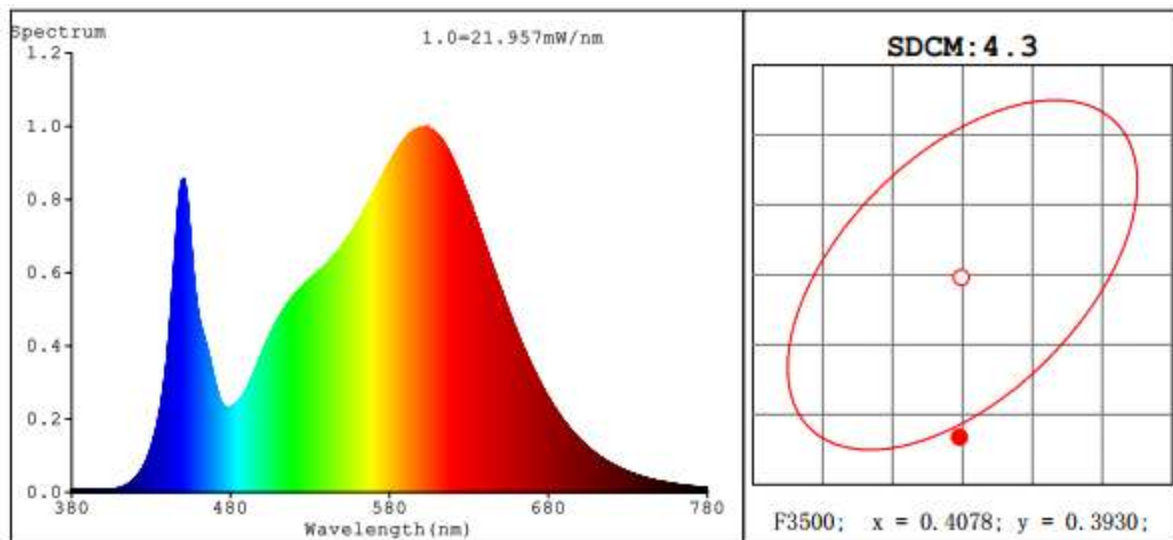

R1 =83.2 R2 =91.6 R3 =96.1 R4 =82.8 R5 =83.6 R6 =88.8 R7 =84.0

R8 =63.2 R9 =13.3 R10=80.1 R11=82.4 R12=71.1 R13=85.4 R14=98.4 R15=77.0

3.2 Integrating Sphere Test - Minimum CCT

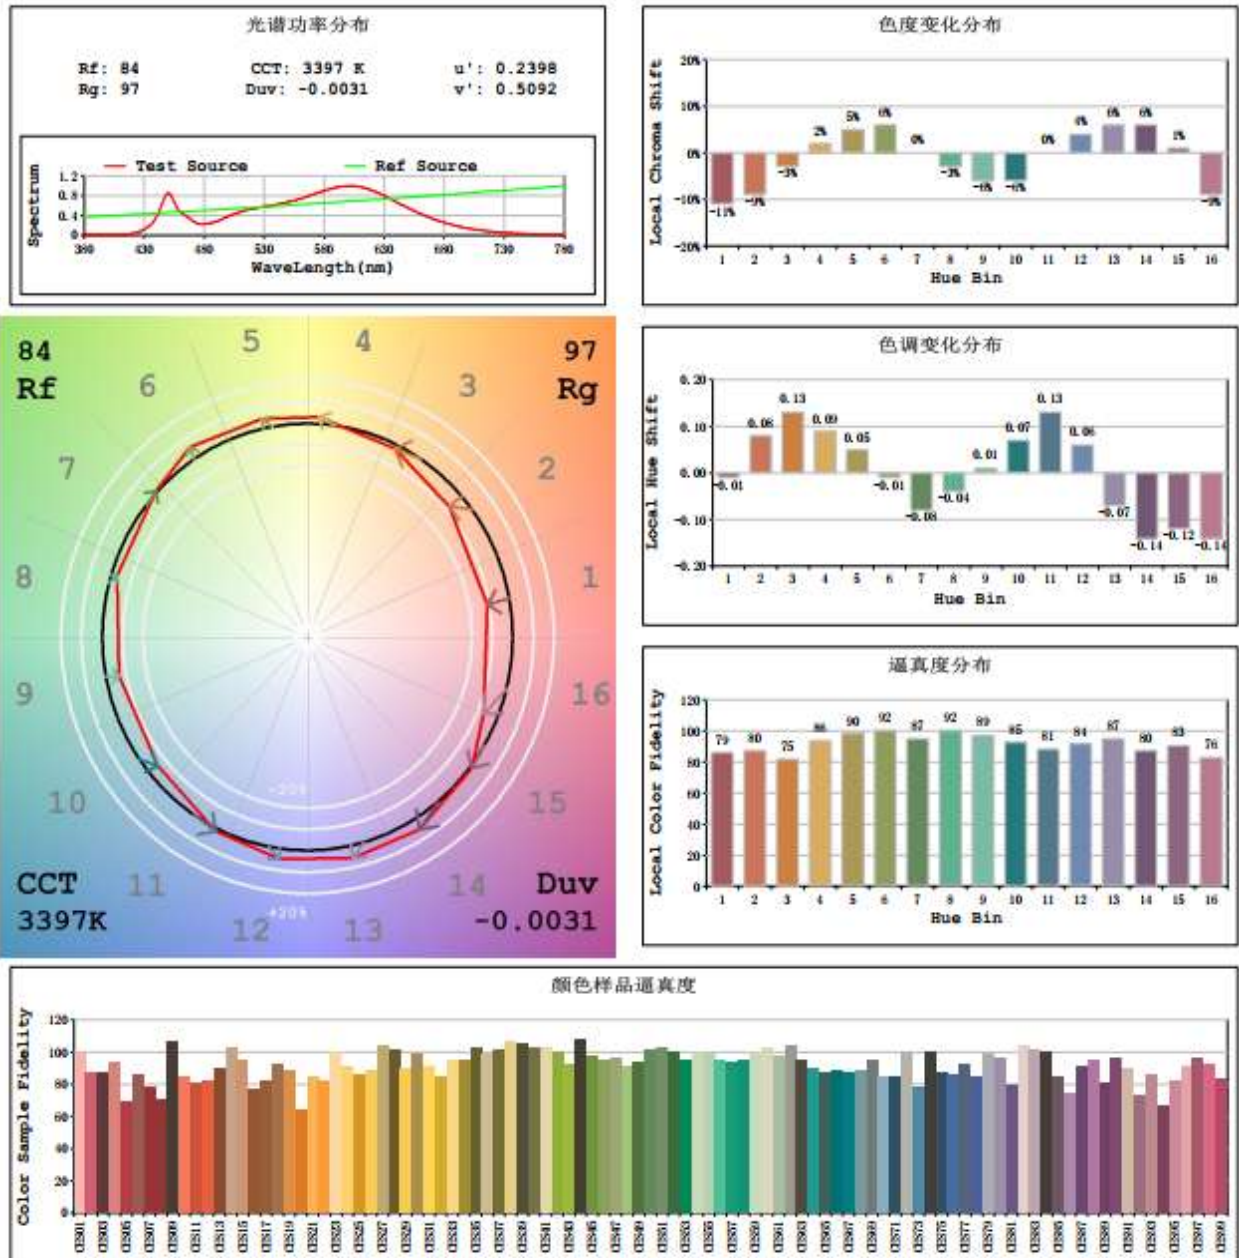

3.0 LM-79 Measurement and Test Results

3.1 Integrating Sphere Test

Model No.	PLT-9-O-8FA-BYP	Sample ID.	A1
Operate time (Min.)	15	Stabilization time (Min.)	15
Temperature (°C)	25.3	Humidity %	55

Test Method
<p>The samples were tested according to the IES LM-79-2008.</p> <p>Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at 25° C ± 1° C.</p> <p>The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.</p> <p>The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ±0.2 percent under load.</p> <p>The sample was measured using 4π geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.</p>

Test Conditions

Temperature (°C)	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	Flux (lm)	Efficacy (lm/W)
25.3	120.00	60.00	0.072	8.522	0.9874	1163.0	136.5
25.3	277.02	60.00	0.035	8.775	0.8961	1170.0	133.3


Test Result

Tc(K)	色差(Duv)	Rf	Rg	Ra	R9	SDCM
3841	-2.9E-03	84	98	84.7	17.0	4.8
3839	-2.9E-03	84	98	84.7	17.0	4.9

3.1 Integrating Sphere Test


Spectroradiometric Parameters

120V

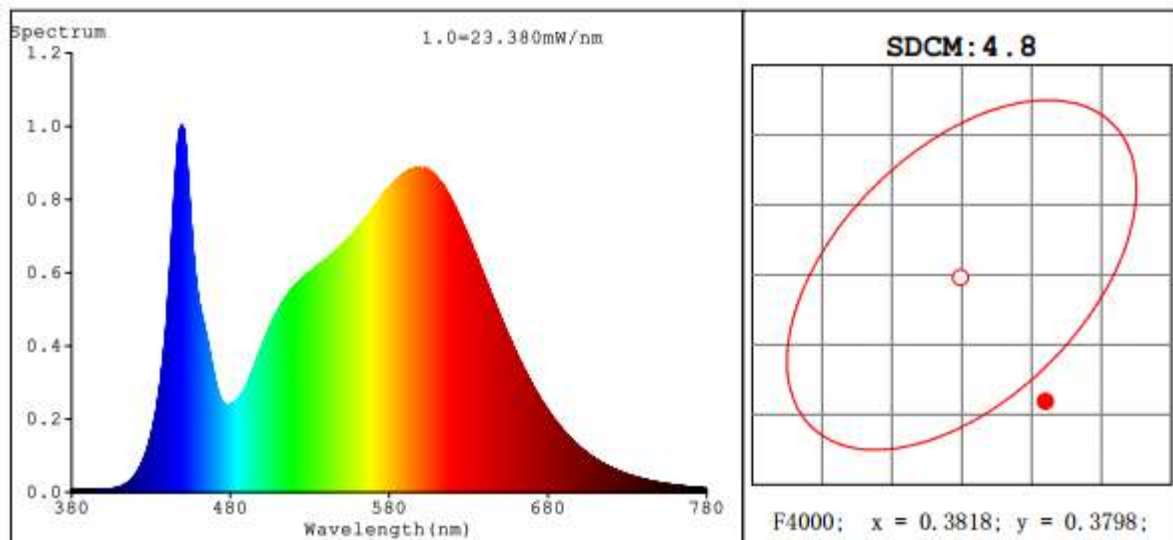

R1 =83.9 R2 =90.6 R3 =94.8 R4 =84.2 R5 =84.0 R6 =86.7 R7 =86.1
R8 =67.0 R9 =17.0 R10=77.2 R11=83.7 R12=67.4 R13=85.6 R14=97.2 R15=78.5


277V

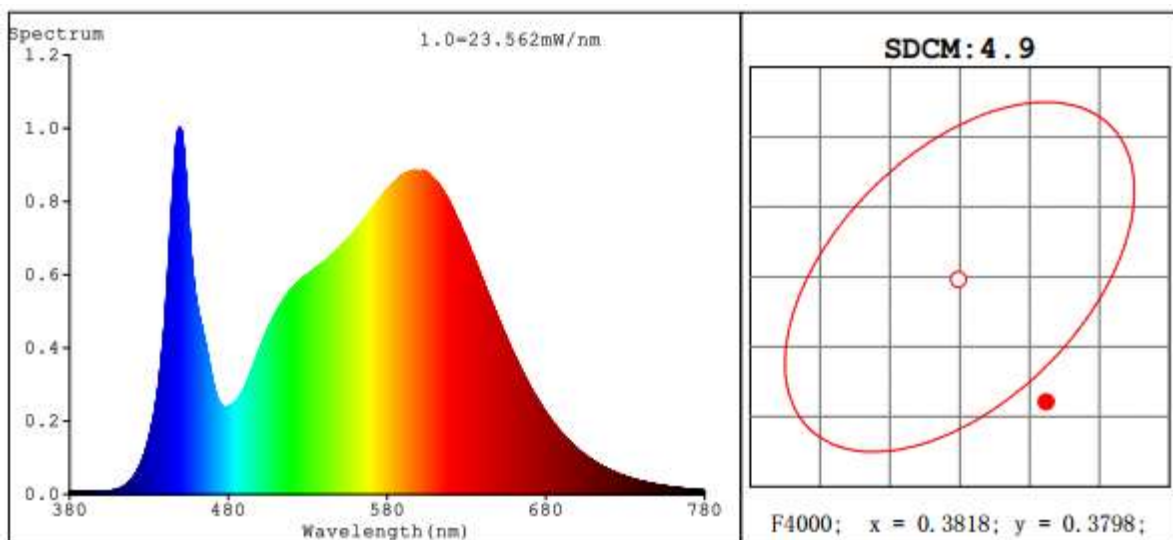

R1 =83.9 R2 =90.6 R3 =94.8 R4 =84.2 R5 =84.1 R6 =86.7 R7 =86.0

R8 =67.0 R9 =17.0 R10=77.2 R11=83.7 R12=67.3 R13=85.5 R14=97.2 R15=78.5

3.2 Integrating Sphere Test - Minimum CCT

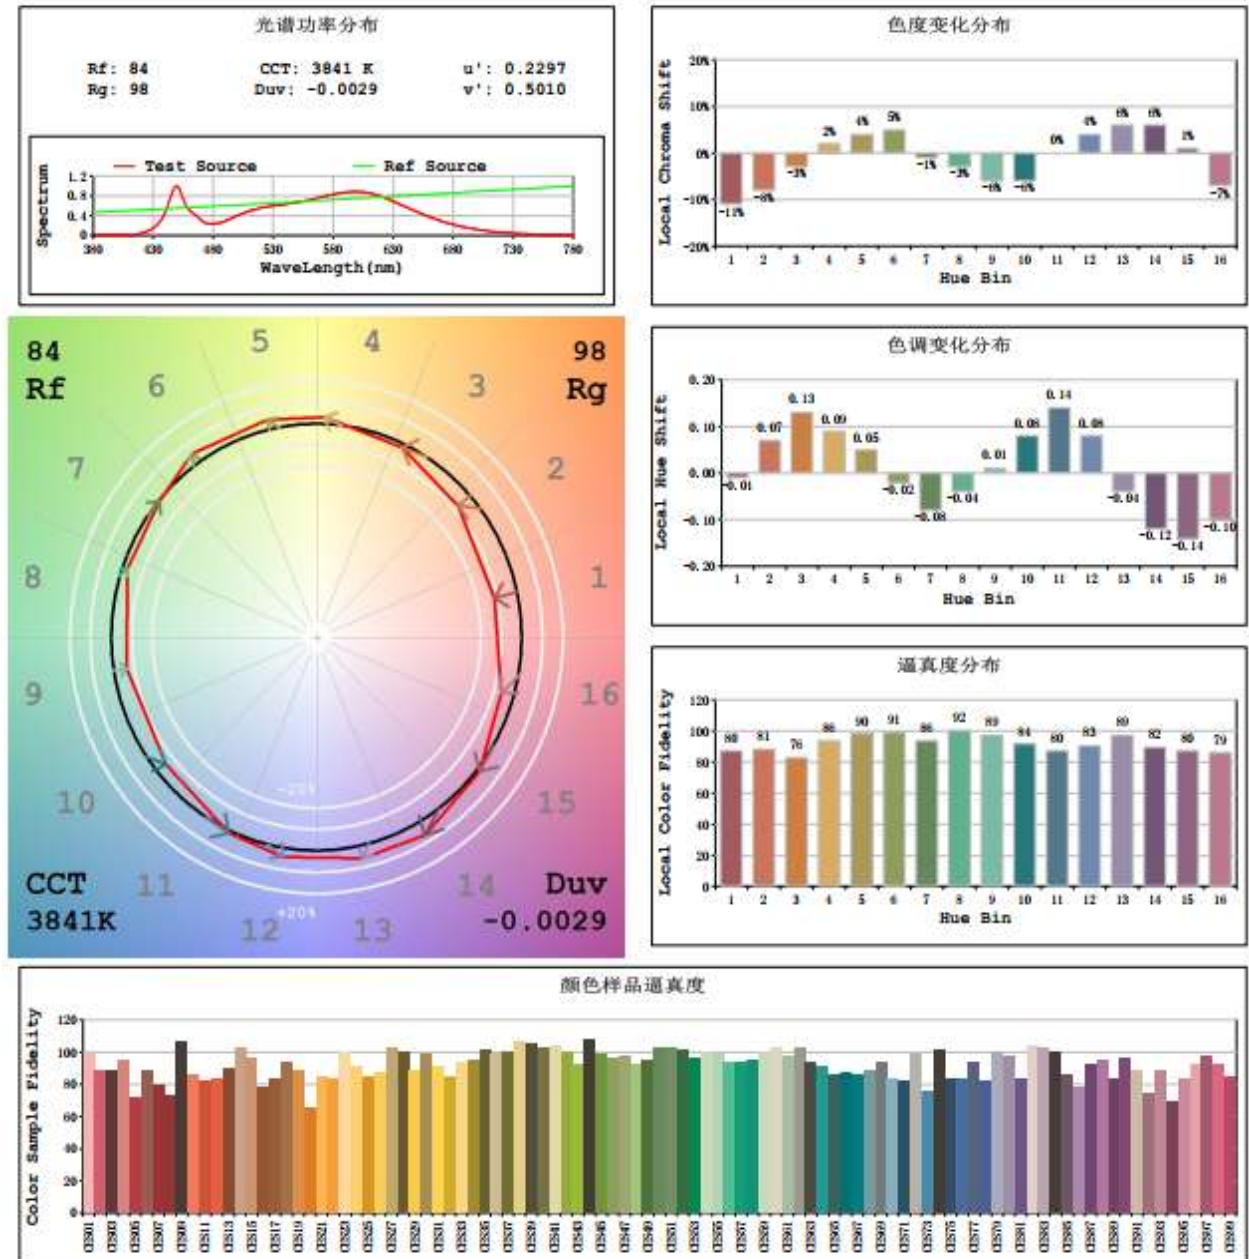

3.0 LM-79 Measurement and Test Results

3.1 Integrating Sphere Test

Model No.	PLT-9-O-8FA-BYP	Sample ID.	A1
Operate time (Min.)	15	Stabilization time (Min.)	15
Temperature (°C)	25.3	Humidity %	55

Test Method
<p>The samples were tested according to the IES LM-79-2008.</p> <p>Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at 25° C ± 1° C.</p> <p>The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.</p> <p>The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ±0.2 percent under load.</p> <p>The sample was measured using 4π geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.</p>

Test Conditions

Temperature (°C)	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	Flux (lm)	Efficacy (lm/W)
25.3	120.00	60.00	0.074	8.784	0.9876	1163.0	132.4
25.3	277.02	60.00	0.036	8.998	0.8977	1168.0	129.8


Test Result

Tc(K)	色差(Duv)	Rf	Rg	Ra	R9	SDCM
4959	9.0E-04	82	97	82.5	11.1	1.3
4959	9.0E-04	82	97	82.5	11.2	1.3

3.1 Integrating Sphere Test


Spectroradiometric Parameters

120V

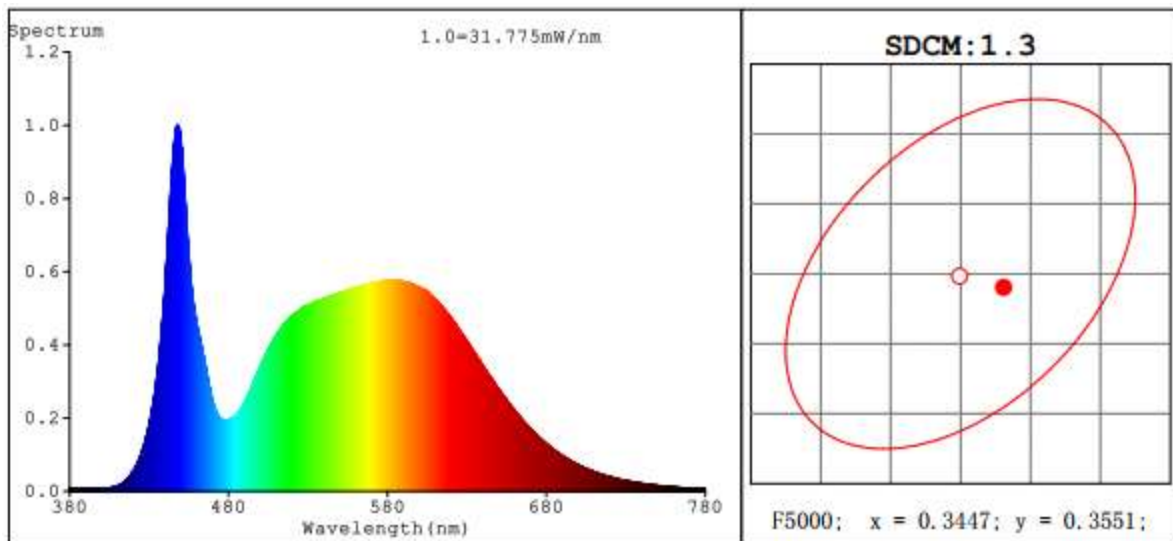

R1 =81.1 R2 =86.3 R3 =89.9 R4 =83.2 R5 =81.4 R6 =80.8 R7 =87.7
 R8 =69.4 R9 =11.1 R10=67.2 R11=82.3 R12=58.3 R13=82.2 R14=94.4 R15=76.3


277V

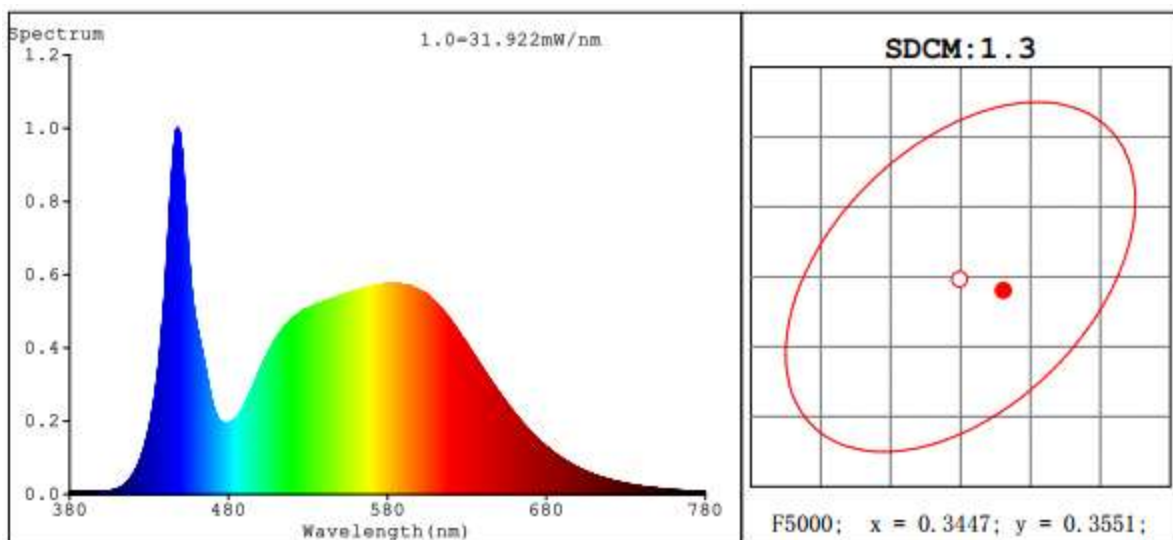

R1 =81.2 R2 =86.3 R3 =89.9 R4 =83.2 R5 =81.4 R6 =80.9 R7 =87.7

R8 =69.4 R9 =11.2 R10=67.2 R11=82.3 R12=58.2 R13=82.2 R14=94.4 R15=76.3

3.2 Integrating Sphere Test - Minimum CCT

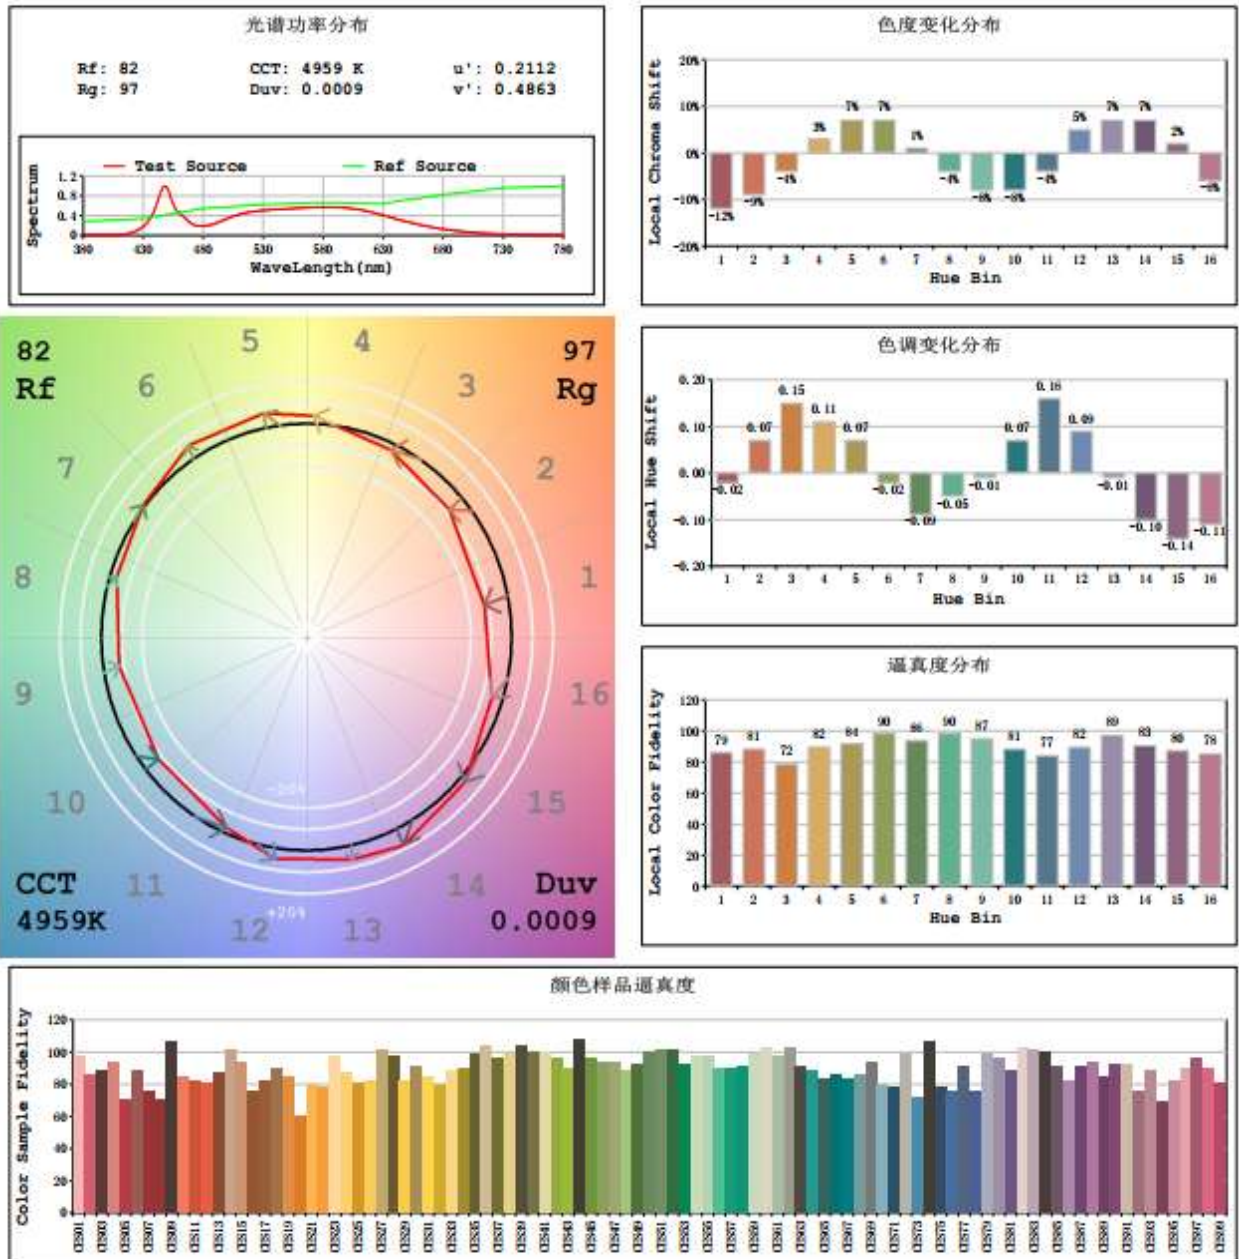

3.3 Goniophotometer Test

Model No.	PLT-9-O-8FA-BYP	Sample ID.	A1
Operate time (Min.)	15	Stabilization time	15

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$.

The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.

The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 0.5o vertical intervals and 10o horizontal intervals.

Test Conditions


Temperature (°C)	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	Flux(lm)
25.3	120.00	60.00	0.074	8.8	0.989	1224.9

Test Result

Beam Angle	Zonal Lumen Requirement(0°-60°)	SC (0°-180°)	SC (90°-270°)	Efficacy (lm/W)
339.3	20.4%	4.25	4.25	139.9

3.3 Goniophotometer Test

Light Distribution Curve

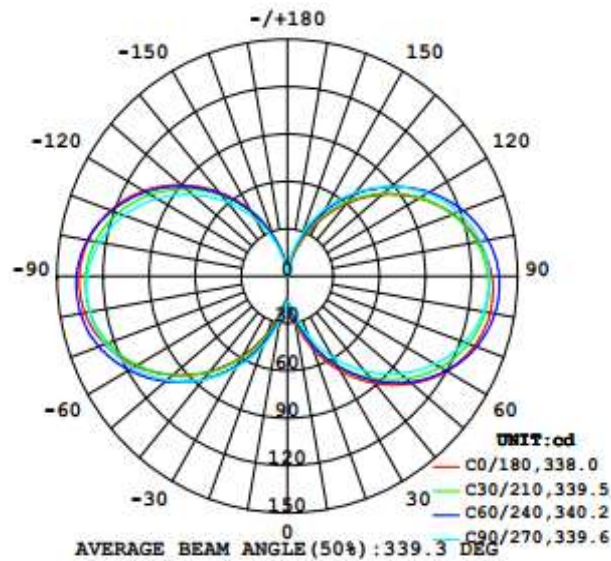

Zonal Lumen Summary

Zone	Lumens	%Lamp	%Fixt	Zone	Lumens
0-20	11.81	1.00	1.00	0-10	1.99
0-30	36.58	3.00	3.00	10-20	9.83
0-40	82.35	6.70	6.70	20-30	24.76
0-60	249.27	20.40	20.40	30-40	45.77
0-80	504.54	41.20	41.20	40-50	70.62
0-90	648.25	52.90	53.00	50-60	96.30
10-90	646.26	52.80	52.80	60-70	119.28
20-40	70.53	5.80	5.80	70-80	135.99
20-50	141.15	11.50	11.50	80-90	143.71
40-70	286.20	23.40	23.40	90-100	141.28
60-80	255.27	20.80	20.90	100-110	128.86
70-80	135.99	11.10	11.10	110-120	108.59
80-90	143.71	11.70	11.70	120-130	83.66
90-110	270.13	22.10	22.10	130-140	57.82
90-120	378.72	30.90	30.90	140-150	34.49
90-130	462.39	37.70	37.80	150-160	16.19
90-150	554.70	45.30	45.30	160-170	4.67
90-180	575.92	47.00	47.00	170-180	0.36
110-180	305.79	25.00	25.00		
0-180	1224.17	99.90	100.00		

5.0 THD and PF Test

Model No.	PLT-9-O-8FA-BYP	Sample ID.	A1
Temperature (°C)	25.3	Humidity %	49

Test Method

The samples were tested according to the ANSI C82.77:2002.

The total harmonic distortion shall be measured to the 40th order.

The ambient temperature condition was maintained at 25° C ± 1° C. The sample measurements were made using a digital power meter and power supply. The sample was operated at rated voltage and was stabilized before measurement. The total harmonic distortion were calculated.

Test Results

Temperature (°C)	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	THD
25.3	120.00	60.00	0.073	8.7	0.988	14.60%
25.3	277.02	60.00	0.036	8.9	0.895	19.30%