



Photometric Test Report

Relevant Standards

- IES LM-79-2008
- ANSI C82.77:2014

Prepared For RAB Lighting Inc.

Room 6A33, No.1388, Wuzhong road, Shanghai, China

Xiao Xiang, 15921313292, Gary.Xiao@rabweb.com

Prepared By

Deliver Co., Ltd.

Block 11, 78 Keling Road, SSTP, Suzhou, China

0512-66801950, kevin.jia@szdeliver.com

Project Number

DLF2408109

Report Number

DLF2408109-7a

Test Date

2024/8/28

Issue Date

2024/9/1

Prepared By

Wangzun Zhu

Approved By

Kevin Jia

The results contained in this report pertain only to the tested sample.

This report shall not be reproduced, except in full, without written approval of Deliver Co., Ltd.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP.

1.0 Test Summary

DLC Technical Requirements v5.1

Outdoor - Pole/Arm-Mounted Area and Roadway Luminaires				
Requirement Category	Test Method	Requirements		Test value
Luminaire Output (lm) (Goniophotometer - Section 4.2)	IES LM-79-2008	1000		287
Minimum Luminaire Efficacy (lm/W) (Goniophotometer - Section 4.2)	IES LM-79-2008	Standard 105	Premium 120	41.1
Power (Input Wattage) (W) (Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		6.99
Total Harmonic Distortion (A%) (THD & PF - section 4.3)	ANSI C82.77:2014	20.00%	120V	6.12%
		20.00%	277V	11.48%
Power Factor (THD & PF - section 4.3)	ANSI C82.77:2014	0.9	120V	0.997
		0.9	277V	0.934
Allowable CCTs* (K) (Integrating Sphere - Section 4.1)	IES LM-79-2008	7 step	3045±175	2971
		4 step	3045±100	
Minimum CRI (Integrating Sphere - Section 4.1)	IES LM-79-2008 CIE 13.3-1995	≥70		83
Minimum R9 (Integrating Sphere - Section 4.1)	IES LM-79-2008 CIE 13.3-1995	-		7
Minimum Rf (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥70		86
Minimum Rg (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥89		97
Minimum IES Rcs,h1 (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	-18% ≤ IES Rcs,h1 ≤ +23%		-11%
Zonal Lumen Requirement (0°-90°) (Goniophotometer - Section 4.2)	IES LM-79-2008	100%		100.00%
Zonal Lumen Requirement (80°-90°) (Goniophotometer - Section 4.2)	IES LM-79-2008	≤10%		0.25%
Input Voltage (V)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		277
(Goniophotometer - Section 4.2)		Non-Worst Case		120
Input Current (A)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		0.027
(Goniophotometer - Section 4.2)		Non-Worst Case		0.053
Power (Input Wattage - W)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		6.99
(Goniophotometer - Section 4.2)		Non-Worst Case		6.35

2.0 Test List

Test Item	Test	Test Date	Model Number	Build Level	Sample No.
1	Integrating Sphere Test	2024/8/28	SA-REB	ES1-02	G1
2	Goniophotometer Test	2024/8/28	SA-REB	ES1-02	G1
3	THD and PF Test	2024/8/28	SA-REB	ES1-02	G1

Remark(If any)

1、 This report shall not be used by the client to claim product endorsement by NVLAP, NIST or any agency of the US government.

2、 The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.

3.0 Production Description

Luminaire Description: SA-REB

Electrical Specification: 120V-277V,50/60HZ

Photos of Luminaire Characteristics



4.0 LM-79 Measurement and Test Results

4.1 Integrating Sphere Test

Model No.	SA-REB	Sample ID.	G1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.3	Humidity (%RH)	56.0

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$.

The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.

The sample was measured using 4π geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.

Test Result

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
120.00	60	0.053	6.37	0.997
277.00	60	0.027	7.01	0.934


Test Result

CCT (K)	CRI	R9	Duv
2971	83	7	0.00019

Rf	Rg	IES Rcs,h1
86	97	-11%

4.1 Integrating Sphere Test

Results

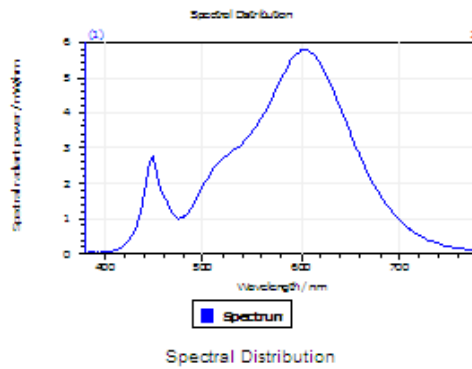

Spectral values


DominantWavelength 582.88 nm
Purity 0.535
PeakWavelength 603.78 nm
Radiant Power 0.8628 W
Width50%:

Color Coordinates

Correlated Color Temperat 2971 K
x: 0.4393 u: 0.2515 u: 0.2515
y: 0.4053 v: 0.3482 v: 0.5222

CRI01	81.1	CRI09	6.8
CRI02	90.9	CRI10	80.1
CRI03	98.3	CRI11	81.7
CRI04	81.5	CRI12	76.0
CRI05	81.7	CRI13	83.4
CRI06	89.9	CRI14	98.6
CRI07	82.5	CRI15	72.9
CRI08	58.5	CRI16	70.7

ResultsCRI 82.8

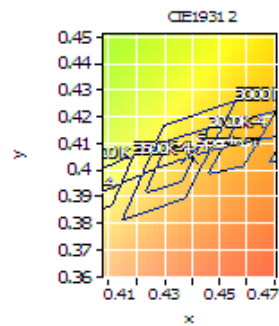

PlanckDistance 1.9E-004

4.1 Integrating Sphere Test







IES TM-30-18 Color Rendition Report

Source: DLF2408109-7a

Manufacturer: RAB Lighting Inc.

Date: 2024/8/28

Model: SA-REB

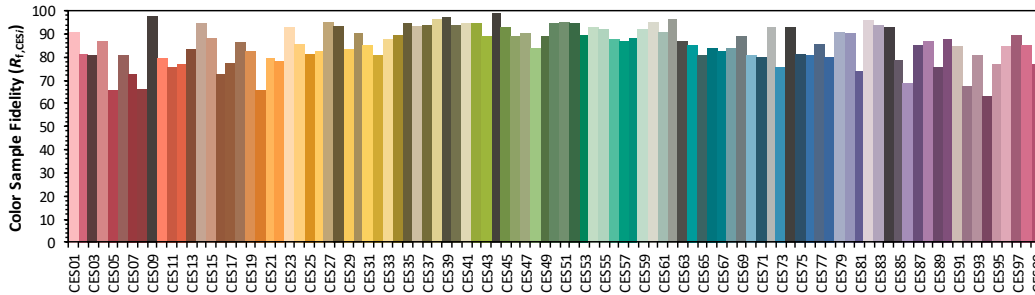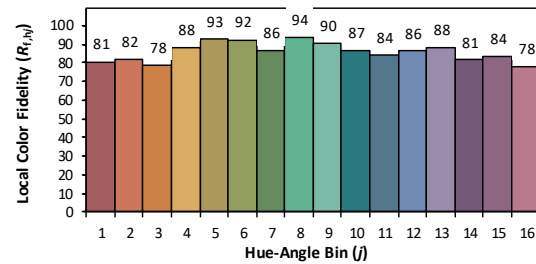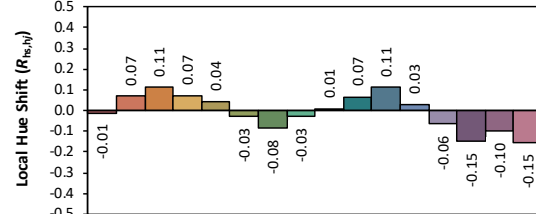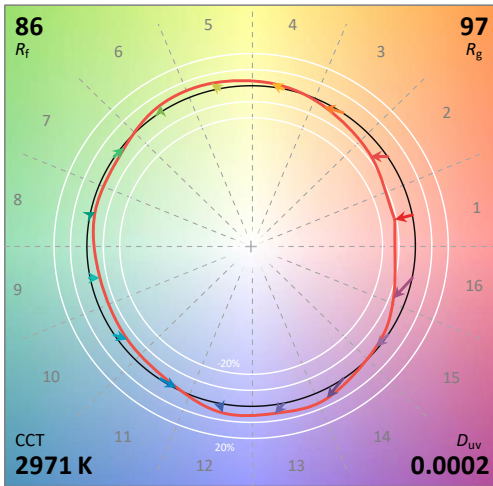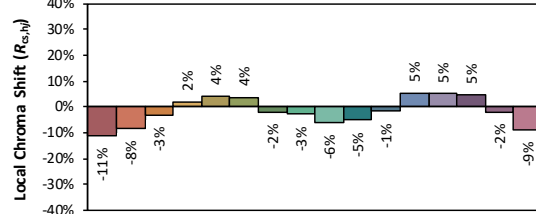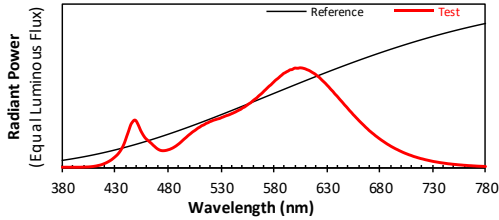

Notes: This is a recommended method for displaying IES TM-30-18 information.

x 0.4393
 y 0.4053
 u' 0.2515
 v' 0.5222

CIE 13.3-1995 (CRI)	
R_a	84
R_g	12

4.1 Integrating Sphere Test

Spectral Distribution over Visible Wavelength							
WL (nm)	Radiant (Watts/nm)	WL (nm)	Radiant (Watts/nm)	WL (nm)	Radiant (Watts/nm)	WL (nm)	Radiant (Watts/nm)
380	4.50E-05	485	1.18E-03	590	5.48E-03	695	1.11E-03
385	4.55E-05	490	1.39E-03	595	5.66E-03	700	9.62E-04
390	4.47E-05	495	1.66E-03	600	5.77E-03	705	8.29E-04
395	4.48E-05	500	1.92E-03	605	5.78E-03	710	7.16E-04
400	4.94E-05	505	2.15E-03	610	5.71E-03	715	6.14E-04
405	6.33E-05	510	2.36E-03	615	5.57E-03	720	5.29E-04
410	9.56E-05	515	2.54E-03	620	5.37E-03	725	4.53E-04
415	1.57E-04	520	2.68E-03	625	5.10E-03	730	3.86E-04
420	2.60E-04	525	2.79E-03	630	4.80E-03	735	3.33E-04
425	4.17E-04	530	2.90E-03	635	4.47E-03	740	2.86E-04
430	6.50E-04	535	3.02E-03	640	4.13E-03	745	2.43E-04
435	9.98E-04	540	3.13E-03	645	3.78E-03	750	2.12E-04
440	1.66E-03	545	3.28E-03	650	3.43E-03	755	1.82E-04
445	2.53E-03	550	3.45E-03	655	3.08E-03	760	1.56E-04
450	2.70E-03	555	3.64E-03	660	2.76E-03	765	1.35E-04
455	2.06E-03	560	3.87E-03	665	2.46E-03	770	1.17E-04
460	1.64E-03	565	4.12E-03	670	2.17E-03	775	1.01E-04
465	1.37E-03	570	4.40E-03	675	1.92E-03	780	8.71E-05
470	1.10E-03	575	4.69E-03	680	1.68E-03		
475	9.98E-04	580	4.97E-03	685	1.47E-03		
480	1.05E-03	585	5.24E-03	690	1.28E-03		

4.0 LM-79 Measurement and Test Results

4.2 Goniophotometer Test

Model No.	SA-REB	Sample ID.	G1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.3	Humidity (%RH)	54.0

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using a type C goniophotometer and software.

The ambient temperature shall be maintained at 25° C ± 1° C, measured at a point not more than 1 m from the sample and at the same height as the sample.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ±0.2 percent under load.

The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 0.5° vertical intervals and 10° horizontal intervals.

Test Conditions

Condition	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
WORST CASE	277.05	60	0.027	6.99	0.934
NON-WROST CASE	120.01	60	0.053	6.35	0.997


Test Result

Flux (lm)	Field Angle(10%)		Beam Angle(50%)		Luminous Efficacy (lm/W)
	C0-180	C90-270	C0-180	C90-270	
287	27.6	68.0	10.0	30.3	41.1


Zonal Lumen Requirement (0°-90°)	Zonal Lumen Requirement (80°-90°)	BUG rating
100.00%	0.25%	B0-U0-G0

4.2 Goniophotometer Test

Light Distribution Curve

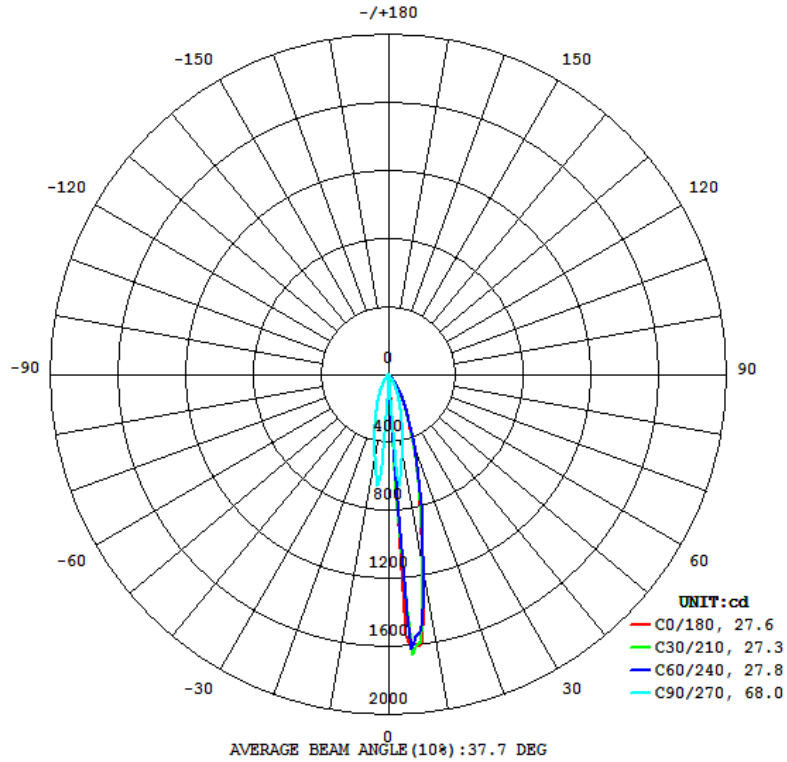

Isolux Plot

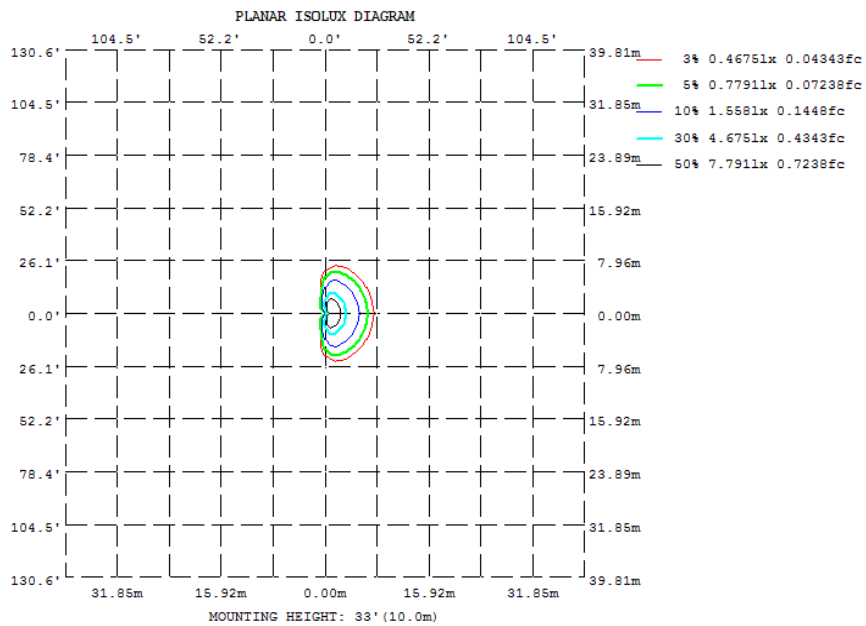

4.2 Goniophotometer Test


Zonal Lumen Summary

γ	C0	C45	C90	C135	C180	C225	C270	C315
10	1187	1191	484.2	0.0347	0.0185	0.0347	484.2	1191
20	443.5	451.9	218.9	0.0222	0.0093	0.0222	218.9	451.9
30	180.5	182.3	96.40	0.0155	0.0067	0.0155	96.40	182.3
40	58.45	58.63	33.16	0.0109	0.0033	0.0109	33.16	58.63
50	22.80	23.66	9.304	0.0086	0.0022	0.0086	9.304	23.66
60	11.38	11.74	4.773	0.0073	0.0016	0.0073	4.773	11.74
70	5.664	5.728	1.937	0.0057	0.0011	0.0057	1.937	5.728
80	2.346	1.768	0.1907	0.0058	0.0011	0.0058	0.1907	1.768
90	0	0	0	0	0	0	0	0
100	0	0	0	0	0	0	0	0
110	0	0	0	0	0	0	0	0
120	0	0	0	0	0	0	0	0
130	0	0	0	0	0	0	0	0
140	0	0	0	0	0	0	0	0
150	0	0	0	0	0	0	0	0
160	0	0	0	0	0	0	0	0
170	0	0	0	0	0	0	0	0
180	0	0	0	0	0	0	0	0
DEG	LUMINOUS INTENSITY: cd							

	Zonal (lm)		Total (lm)	Percent
0-10	56.93	0 - 10	56.93	19.82%
10-20	101.45	0 - 20	158.38	55.13%
20-30	66.18	0 - 30	224.56	78.17%
30-40	35.40	0 - 40	259.96	90.49%
40-50	13.62	0 - 50	273.58	95.23%
50-60	7.42	0 - 60	281.00	97.81%
60-70	4.29	0 - 70	285.29	99.31%
70-80	1.28	0 - 80	286.57	99.75%
80-90	0.71	0 - 90	287.28	100.00%
90-100	0.00	0 - 100	287.28	100.00%
100-110	0.00	0 - 110	287.28	100.00%
110-120	0.00	0 - 120	287.28	100.00%
120-130	0.00	0 - 130	287.28	100.00%
130-140	0.00	0 - 140	287.28	100.00%
140-150	0.00	0 - 150	287.28	100.00%
150-160	0.00	0 - 160	287.28	100.00%
160-170	0.00	0 - 170	287.28	100.00%
170-180	0.00	0 - 180	287.28	100.00%


4.2 Goniophotometer Test

LCS/BUG

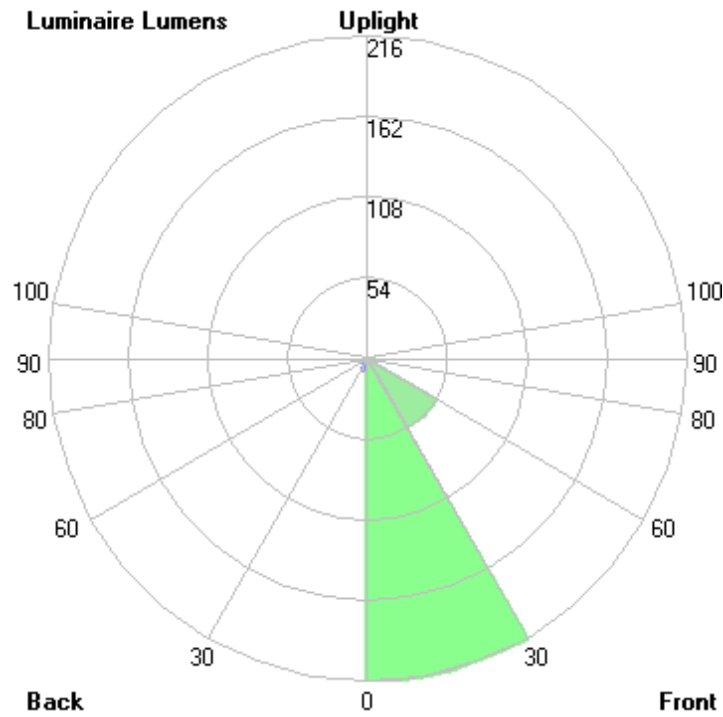


	Lumens	% Lamp	% Luminaire
FL - Front-Low (0-30)	216.1	N.A.	75.2
FM - Front-Medium (30-60)	54.0	N.A.	18.8
FH - Front-High (60-80)	5.4	N.A.	1.9
FVH - Front-Very High (80-90)	0.7	N.A.	0.2
BL - Back-Low (0-30)	8.5	N.A.	3.0
BM - Back-Medium (30-60)	2.4	N.A.	0.8
BH - Back-High (60-80)	0.2	N.A.	0.1
BVH - Back-Very High (80-90)	< 0.05	N.A.	0.0
UL - Uplight-Low (90-100)	0.0	N.A.	0.0
UH - Uplight-High (100-180)	0.0	N.A.	0.0
Total	287.3	N.A.	100.0
BUG Rating	B0-U0-G0		

Coefficients of Utilization

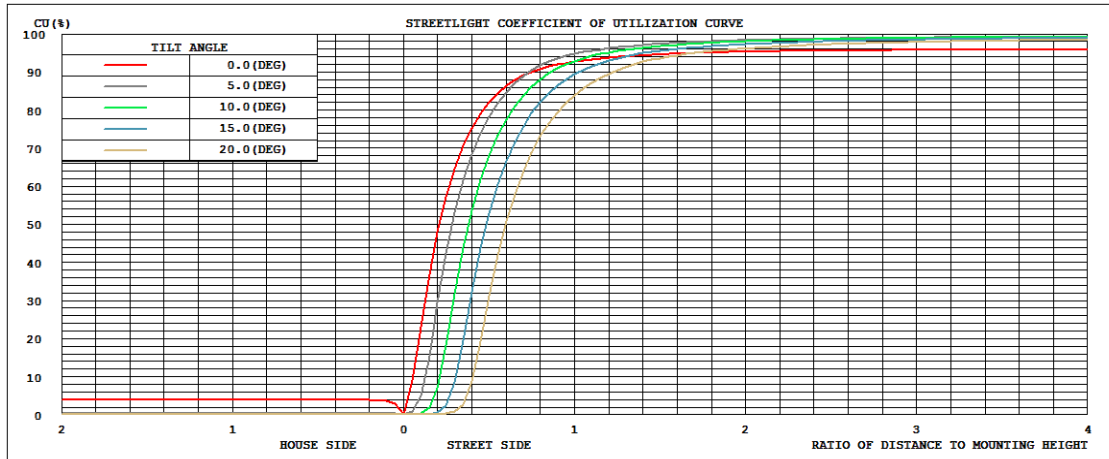

Isolines

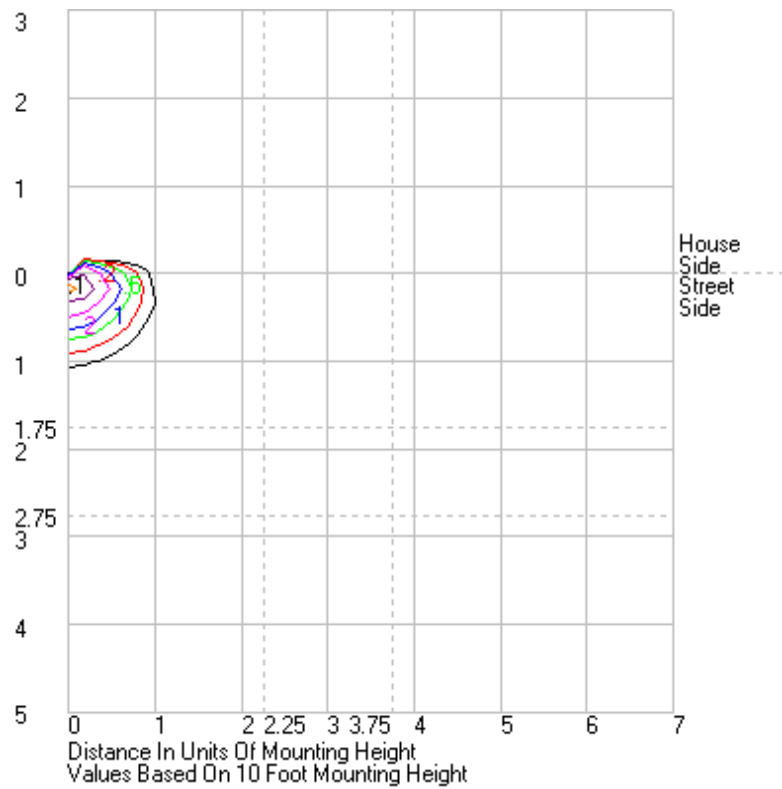



4.2 Goniophotometer Test

	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270	285	300	315	330	345	360
0	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017
1	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.02
2	0.03	0.01	0.01	0.01	0.01	0.01	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.01	0.01	0.01	0.01	0.01	0.03
3	0.15	4.75	8.01	25.56	33.09	57.91	16.91	0.05	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.05	16.91	57.91	33.09	25.56	8.01	4.75	0.15
4	1532.05	687.7	709.4	672.42	741.16	767.03	142.36	0.13	0.05	0.03	0.02	0.02	0.02	0.02	0.02	0.03	0.05	0.13	142.36	767.03	741.16	672.42	709.4	687.7	1532.05
5	1581.03	1631.74	1650.67	1637.28	1617.62	1600.19	542.32	0.28	0.05	0.03	0.02	0.02	0.02	0.02	0.02	0.03	0.05	0.28	542.32	1600.19	1617.62	1637.28	1650.67	1631.74	1581.03
6	1598.89	1595.05	1594.9	1567.82	1546.73	1559.08	656.42	0.32	0.06	0.03	0.02	0.02	0.02	0.02	0.02	0.03	0.06	0.32	656.42	1559.08	1546.73	1567.82	1594.9	1595.05	1598.89
7	1593.03	1587.07	1576.78	1537.9	1521.97	1514.27	610.51	0.33	0.06	0.03	0.02	0.02	0.02	0.02	0.02	0.03	0.06	0.33	610.51	1514.27	1521.97	1537.9	1576.78	1587.07	1593.03
8	1492.88	1477.84	1468.51	1449.49	1446.49	1415.9	568.91	0.34	0.06	0.03	0.02	0.02	0.02	0.02	0.02	0.03	0.06	0.34	568.91	1415.9	1446.49	1449.49	1468.51	1477.84	1492.88
9	1336.67	1326.44	1328.37	1330.53	1335.28	1304.2	520.28	0.34	0.06	0.03	0.02	0.02	0.02	0.02	0.02	0.03	0.06	0.34	520.28	1304.2	1335.28	1330.53	1328.37	1326.44	1336.67
10	1186.65	1180.71	1182.18	1191.46	1206.71	1187.84	484.22	0.35	0.06	0.03	0.02	0.02	0.02	0.02	0.02	0.03	0.06	0.35	484.22	1187.84	1206.71	1191.46	1182.18	1180.71	1186.65
11	1062.58	1067.58	1071.97	1074.54	1086.3	1076.28	451.64	0.35	0.06	0.04	0.02	0.02	0.02	0.02	0.02	0.04	0.06	0.35	451.64	1076.28	1086.3	1074.54	1071.97	1067.58	1062.58
12	954.67	958.76	967.65	974.41	984.18	975.84	420.43	0.35	0.06	0.04	0.02	0.02	0.02	0.02	0.02	0.04	0.06	0.35	420.43	975.84	984.18	974.41	967.65	958.76	954.67
13	863.22	867.75	876.93	889.21	908.49	895.63	392.54	0.34	0.06	0.04	0.02	0.02	0.02	0.02	0.02	0.04	0.06	0.34	392.54	895.63	908.49	889.21	876.93	867.75	863.22
14	788.39	793.05	798.19	807.72	827.12	819.6	362.55	0.34	0.06	0.03	0.02	0.02	0.02	0.02	0.02	0.03	0.06	0.34	362.55	819.6	827.12	807.72	798.19	793.05	788.39
15	724.44	721.59	725.84	732.37	746.27	743.48	332.52	0.33	0.06	0.03	0.02	0.02	0.02	0.02	0.02	0.03	0.06	0.33	332.52	743.48	746.27	732.37	725.84	721.59	724.44
16	656.76	653.2	657.83	666.53	675.77	674.18	304.36	0.32	0.05	0.03	0.02	0.02	0.02	0.02	0.02	0.03	0.05	0.32	304.36	674.18	675.77	666.53	657.83	653.2	656.76
17	600.56	595.98	595.98	604.41	612.56	609.78	278.22	0.31	0.05	0.03	0.02	0.01	0.01	0.01	0.02	0.03	0.05	0.31	278.22	609.78	612.56	604.41	595.98	595.98	600.56
18	544.7	540.33	540.26	549.65	561.5	555.09	255.99	0.31	0.04	0.03	0.02	0.01	0.01	0.01	0.02	0.03	0.04	0.31	255.99	555.09	561.5	549.65	540.26	540.33	544.7
19	490.96	489.19	489.33	497.25	510.96	507.35	236.33	0.3	0.04	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.04	0.3	236.33	507.35	510.96	497.25	489.33	489.19	490.96
20	443.49	439.09	443.3	451.9	462.98	460.53	218.91	0.29	0.04	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.04	0.29	218.91	460.53	462.98	451.9	443.3	439.09	443.49
21	400.95	399.05	403.4	411.2	419.62	418.45	201.74	0.28	0.04	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.04	0.28	201.74	418.45	419.62	411.2	403.4	399.05	400.95
22	363.44	362.4	366.73	372.85	380.18	379.86	186.07	0.28	0.04	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.04	0.28	186.07	379.86	380.18	372.85	366.73	362.4	363.44
23	330.14	329.53	334.01	338.88	344.42	343.91	170.86	0.27	0.04	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.04	0.27	170.86	343.91	344.42	338.88	334.01	329.53	330.14
24	301.55	300.78	305.39	308.16	313.35	314.1	157.3	0.26	0.04	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.04	0.26	157.3	314.1	313.35	308.16	305.39	300.78	301.55
25	277.54	276.32	280.21	281.64	286.23	286.35	144.71	0.26	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.03	0.26	144.71	286.35	286.23	281.64	280.21	276.32	277.54
26	254.3	253.75	256.99	257.51	261.82	262.16	133.52	0.25	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.03	0.25	133.52	262.16	261.82	257.51	256.99	253.75	254.3
27	233.7	233.37	235.63	236.12	239.74	240.4	122.94	0.24	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.03	0.24	122.94	240.4	239.74	236.12	235.63	233.37	233.7
28	215.09	214.49	215.61	216.71	219.38	219.97	113.39	0.24	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.03	0.24	113.39	219.97	219.38	216.71	215.61	214.49	215.09
29	197.84	197.53	197.46	199.02	200.98	202.15	104.59	0.23	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.03	0.23	104.59	202.15	200.98	199.02	197.46	197.53	197.84
30	180.54	180.7	179.99	182.28	184.04	184.28	96.4	0.23	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.03	0.23	96.4	184.28	184.04	182.28	179.99	180.7	180.54
31	164.19	164.59	164.55	166.67	167.84	168.75	87.81	0.22	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.03	0.22	87.81	168.75	167.84	166.67	164.55	164.59	164.19
32	150.36	149.78	150.2	151.97	152.91	153.95	79.82	0.22	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.03	0.22	79.82	153.95	152.91	151.97	150.2	149.78	150.36
33	136.96	134.97	136.18	137.55	138.86	139.55	72.26	0.21	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.03	0.21	72.26	139.55	138.86	137.55	136.18	134.97	136.96
34	123.75	121.88	122.92	124.71	125.81	126.54	65.68	0.21	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.03	0.21	65.68	126.54	125.81	124.71	122.92	121.88	123.75
35	110.95	109.38	109.9	112.01	113.79	114.15	59.81	0.2	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.03	0.2	59.81	114.15	113.79	112.01	109.9	109.38	110.95
36	98.86	97.37	97.64	100.16	101.86	102.25	53.87	0.2	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.03	0.2	53.87	102.25	101.86	100.16	97.64	97.37	98.86
37	87.38	86.18	86.88	88.92	90.35	91.19	48.39	0.19	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.03	0.19	48.39	91.19	90.35	88.92	86.88	86.18	87.38
38	76.13	75.58	76.07	78.27	79.54	79.39	43.03	0.18	0.03	0.01	0.01	0	0	0	0.01	0.01	0.03	0.18	43.03	79.39	79.54	78.27	76.07	75.58	76.13
39	65.48	65.36	65.67	67.75	69.17	69.76	37.97	0.18	0.03	0.01	0.01	0	0	0	0.01	0.01	0.03	0.18	37.97	69.76	69.17	67.75	65.67	65.36	65.48
40	58.45	57.68	57.5	58.63	60.59	60.56	33.16	0.18	0.02	0.01	0.01	0	0	0	0.01	0.01	0.02	0.18	33.16	60.56	60.59	58.63	57.5	57.68	58.45
41	51.46	50.87	50.34	50.71	52.38	53.02	29.34	0.17	0.02	0.01	0.01	0	0	0	0.01	0.01	0.02	0.17	29.34	53.02	52.38	50.71	50.34	50.87	51.46
42	45.32	45.08	44.28	44.63	45.28	46.33	25.31	0.17	0.02	0.01	0.01	0	0	0	0.01	0.01	0.02	0.17	25.31	46.33	45.28	44.63	44.28	45.08	45.32
43	40.93	40.33	39.55	39.92	40.03	40.71	21.82	0.16	0.02	0.01	0.01	0	0	0	0.01	0.01	0.02	0.16	21.82	40.71	40.03	39.92	39.55	40.33	40.93
44	37.08	36.52	35.84	36.15	36.01	36.42	18.94	0.16	0.02	0.01	0.01	0	0	0	0.01	0.01	0.02	0.16	18.94	36.42	36.01	36.15	35.84	36.52	37.08
45	33.6	33.43	32.97	33.09	32.85	32.6	16.61	0.15	0.02	0.01	0	0	0	0	0	0.01	0.02	0.15	16.61	32.6	32.85	33.09	32.97	33.43	33.6
46	30.46	30.76	30.31	30.69	30.18	29.69	14.3																		



51	21.29	21.47	21.68	22.41	22.01	20.69	8.56	0.13	0.02	0.01	0	0	0	0	0	0.01	0.02	0.13	8.56	20.69	22.01	22.41	21.68	21.47	21.29
52	20.13	20.25	20.54	21.03	20.93	19.54	8.04	0.12	0.02	0.01	0	0	0	0	0	0.01	0.02	0.12	8.04	19.54	20.93	21.03	20.54	20.25	20.13
53	19.02	19.18	19.46	20.06	19.94	18.71	7.67	0.12	0.02	0.01	0	0	0	0	0	0.01	0.02	0.12	7.67	18.71	19.94	20.06	19.46	19.18	19.02
54	18.11	18.32	18.73	19.21	19.21	17.8	7.24	0.11	0.02	0.01	0	0	0	0	0	0.01	0.02	0.11	7.24	17.8	19.21	19.21	18.73	18.32	18.11
55	17.04	17.38	17.25	17.4	17.29	16.15	6.48	0.11	0.02	0.01	0	0	0	0	0	0.01	0.02	0.11	6.48	16.15	17.29	17.4	17.25	17.38	17.04
56	15.04	15.27	15.33	15.59	15.68	14.67	5.94	0.1	0.02	0.01	0	0	0	0	0	0.01	0.02	0.1	5.94	14.67	15.68	15.59	15.33	15.27	15.04
57	13.99	14.29	14.28	14.52	14.52	13.33	5.55	0.1	0.02	0.01	0	0	0	0	0	0.01	0.02	0.1	5.55	13.33	14.52	14.52	14.28	14.29	13.99
58	12.93	13.34	13.27	13.48	13.53	12.43	5.25	0.09	0.02	0.01	0	0	0	0	0	0.01	0.02	0.09	5.25	12.43	13.53	13.48	13.27	13.34	12.93
59	12.07	12.37	12.34	12.57	12.59	11.54	5.02	0.09	0.02	0.01	0	0	0	0	0	0.01	0.02	0.09	5.02	11.54	12.59	12.57	12.34	12.37	12.07
60	11.38	11.46	11.56	11.74	11.78	10.94	4.77	0.09	0.02	0.01	0	0	0	0	0	0.01	0.02	0.09	4.77	10.94	11.78	11.74	11.56	11.46	11.38
61	10.71	10.85	11	11.12	11.14	10.33	4.53	0.08	0.01	0.01	0	0	0	0	0	0.01	0.01	0.08	4.53	10.33	11.14	11.12	11	10.85	10.71
62	10.19	10.34	10.49	10.63	10.56	9.82	4.26	0.08	0.01	0.01	0	0	0	0	0	0.01	0.01	0.08	4.26	9.82	10.56	10.63	10.49	10.34	10.19
63	9.94	10	10.1	10.3	10.24	9.32	4.04	0.07	0.01	0.01	0	0	0	0	0	0.01	0.01	0.07	4.04	9.32	10.24	10.3	10.1	10	9.94
64	9.57	9.63	9.7	9.8	9.73	8.94	3.82	0.07	0.01	0.01	0	0	0	0	0	0.01	0.01	0.07	3.82	8.94	9.73	9.8	9.7	9.63	9.57
65	9.01	9.01	9.14	9.27	9.24	8.43	3.62	0.06	0.01	0.01	0	0	0	0	0	0.01	0.01	0.06	3.62	8.43	9.24	9.27	9.14	9.01	9.01
66	8.51	8.53	8.66	8.74	8.56	7.82	3.34	0.06	0.01	0.01	0	0	0	0	0	0.01	0.01	0.06	3.34	7.82	8.56	8.74	8.66	8.53	8.51
67	8.02	7.91	8.04	8.15	7.92	7.15	3.02	0.06	0.01	0.01	0	0	0	0	0	0.01	0.01	0.06	3.02	7.15	7.92	8.15	8.04	7.91	8.02
68	7.45	7.39	7.43	7.51	7.28	6.44	2.7	0.05	0.01	0.01	0	0	0	0	0	0.01	0.01	0.05	2.7	6.44	7.28	7.51	7.43	7.39	7.45
69	6.55	6.52	6.36	6.4	6.28	5.67	2.24	0.05	0.01	0.01	0	0	0	0	0	0.01	0.01	0.05	2.24	5.67	6.28	6.4	6.36	6.52	6.55
70	5.66	5.78	5.84	5.73	5.14	5.2	1.94	0.05	0.01	0.01	0	0	0	0	0	0.01	0.01	0.05	1.94	5.2	5.14	5.73	5.84	5.78	5.66
71	4.9	5	5.15	4.71	3.53	4.66	1.48	0.04	0.01	0.01	0	0	0	0	0	0.01	0.01	0.04	1.48	4.66	3.53	4.71	5.15	5	4.9
72	3.41	3.35	3.18	2.75	2.34	2.03	0.65	0.04	0.01	0.01	0	0	0	0	0	0.01	0.01	0.04	0.65	2.03	2.34	2.75	3.18	3.35	3.41
73	2.96	2.93	2.8	2.49	2.09	1.56	0.41	0.04	0.01	0.01	0	0	0	0	0	0.01	0.01	0.04	0.41	1.56	2.09	2.49	2.8	2.93	2.96
74	2.82	2.77	2.63	2.32	1.93	1.4	0.34	0.04	0.01	0.01	0	0	0	0	0	0.01	0.01	0.04	0.34	1.4	1.93	2.32	2.63	2.77	2.82
75	2.69	2.64	2.49	2.18	1.79	1.27	0.3	0.03	0.01	0.01	0	0	0	0	0	0.01	0.01	0.03	0.3	1.27	1.79	2.18	2.49	2.64	2.69
76	2.59	2.53	2.37	2.06	1.67	1.16	0.26	0.03	0.01	0.01	0	0	0	0	0	0.01	0.01	0.03	0.26	1.16	1.67	2.06	2.37	2.53	2.59
77	2.51	2.44	2.27	1.96	1.57	1.06	0.23	0.03	0.01	0.01	0	0	0	0	0	0.01	0.01	0.03	0.23	1.06	1.57	1.96	2.27	2.44	2.51
78	2.43	2.36	2.19	1.88	1.49	0.99	0.21	0.03	0.01	0.01	0	0	0	0	0	0.01	0.01	0.03	0.21	0.99	1.49	1.88	2.19	2.36	2.43
79	2.38	2.31	2.13	1.82	1.43	0.94	0.2	0.03	0.01	0.01	0	0	0	0	0	0.01	0.01	0.03	0.2	0.94	1.43	1.82	2.13	2.31	2.38
80	2.35	2.26	2.08	1.77	1.38	0.89	0.19	0.03	0.01	0.01	0	0	0	0	0	0.01	0.01	0.03	0.19	0.89	1.38	1.77	2.08	2.26	2.35
81	2.27	2.2	2.02	1.71	1.32	0.84	0.18	0.03	0.01	0.01	0	0	0	0	0	0.01	0.01	0.03	0.18	0.84	1.32	1.71	2.02	2.2	2.27
82	2.21	2.13	1.95	1.65	1.27	0.79	0.15	0.03	0.01	0.01	0	0	0	0	0	0.01	0.01	0.03	0.15	0.79	1.27	1.65	1.95	2.13	2.21
83	2.15	2.07	1.89	1.59	1.21	0.74	0.13	0.03	0.01	0.01	0	0	0	0	0	0.01	0.01	0.03	0.13	0.74	1.21	1.59	1.89	2.07	2.15
84	2.09	2.02	1.83	1.53	1.15	0.68	0.11	0.03	0.01	0.01	0	0	0	0	0	0.01	0.01	0.03	0.11	0.68	1.15	1.53	1.83	2.02	2.09
85	2.04	1.96	1.78	1.48	1.1	0.64	0.1	0.03	0.01	0.01	0	0	0	0	0	0.01	0.01	0.03	0.1	0.64	1.1	1.48	1.78	1.96	2.04
86	1.99	1.91	1.72	1.42	1.05	0.59	0.09	0.03	0.01	0.01	0	0	0	0	0	0.01	0.01	0.03	0.09	0.59	1.05	1.42	1.72	1.91	1.99
87	1.94	1.86	1.67	1.37	1	0.55	0.08	0.03	0.01	0.01	0	0	0	0	0	0.01	0.01	0.03	0.08	0.55	1	1.37	1.67	1.86	1.94
88	1.9	1.82	1.63	1.34	0.96	0.53	0.07	0.03	0.01	0.01	0	0	0	0	0	0.01	0.01	0.03	0.07	0.53	0.96	1.34	1.63	1.82	1.9
89	1.86	1.79	1.6	1.3	0.93	0.5	0.07	0.03	0.02	0.01	0	0	0	0	0	0.01	0.02	0.03	0.07	0.5	0.93	1.3	1.6	1.79	1.86
90	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
91	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
92	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
93	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
94	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
95	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
96	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
97	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
98	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
99	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
100	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
101	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
102	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
103	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
104	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
105	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

4.0 LM-79 Measurement and Test Results

4.3 THD and PF Test

Model No.	SA-REB	Sample ID.	G1
Temperature (°C)	25.3	Humidity (%RH)	56.0

Test Method

The samples were tested according to the ANSI C82.77:2014.
The total harmonic distortion shall be measured to the 40th order.
The ambient temperature condition was maintained at 25° C ± 1° C. The sample measurements were made using a digital power meter and power supply. The sample was operated at rated voltage and was stabilized before measurement. The total harmonic distortion were calculated.

Test Results

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	THD
120.00	60	0.053	6.37	0.997	6.12%
277.00	60	0.027	7.01	0.934	11.48%

5.0 Equipment Information

Test Equipment			
Equipment ID	Equipment Name	Last Calibration Date	Calibration Due Date
DLF107	Integrating Sphere System	2023/12/24	2024/12/23
DLF108	Auxiliary Lamp	2023/12/24	2024/12/23
DLF122	Measurement Standard Lamp Standard Lamp Type: 220 V, 0.4720 A, Tungsten, Omni-derectional	2023/12/24	2024/12/23
DLF116	AC Power Source	2023/12/16	2024/12/15
DLF516	Power Meter	2023/12/16	2024/12/15
DLF112	Temperature Recorder	2023/12/28	2024/12/27
DLF114	Temperature & Humidity Datalogger	2023/12/28	2024/12/27
DLF101	Goniophotometer	2023/12/24	2024/12/23
DLF511	AC Power Source	2023/12/16	2024/12/15
DLF512	AC Power Source	2023/12/16	2024/12/15
DLF513	AC Power Source	2023/12/16	2024/12/15
DLF507	DC Power Source	2023/12/16	2024/12/15
DLF111	Temperature & Humidity Datalogger	2023/12/28	2024/12/27
DLF119	Power Meter	2023/12/16	2024/12/15
DLF031	Temperature data logger	2024/6/20	2025/6/19
DLF073	Power Analyzer	2024/6/20	2025/6/19
DLF003	Temperature & Humidity Datalogger	2024/6/20	2025/6/19

***** End of Test Report*****