



Color: Bronze

Weight: 177.5 lbs

Project:	Type:
Prepared By:	Date:

Technical Specifications

Compliance

CSA Listed:

Suitable for wet locations

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Performance

Description:

Steel pole 4" round 7 gauge 20 foot welded tenon square base

Construction

Shaft:

46,000 p.s.i. minimum yield.

Hand Holes:

Reinforced with grounding lug and removable cover

Base Plates:

36,000 p.s.i. minimum yield.

Color:

Bronze powder coating

Height:

20 ft

Gauge:

7

Wall Thickness:

3/16"

Shaft Size:

4"

Anchor Bolt Templates:

WARNING Template must be printed on 11" x 17" sheet for actual size. CHECK SCALE BEFORE USING. Templates shipped with anchor bolts and available [online](#).

Max EPA's/Max Weights:

- 70MPH 14.9 ft/410 lb.
- 80MPH 10.7 ft/350 lb.
- 90MPH 7.8 ft/165 lb.
- 100MPH 5.8 ft/130 lb.
- 110MPH 4.2 ft/70 lb.
- 120MPH 3.1 ft/60 lb.
- 130MPH 2.1 ft/50 lb.
- 140MPH 1.4 ft/50 lb.
- 150MPH 0.8 ft./20 lb

Accessories:


- Base/Cap: [BASE-R4](#)
- Anchor Bolts: [BOLT4/7](#)

Other

Terms of Sale:

Pole Terms of Sale is available [online](#).

Dimensions

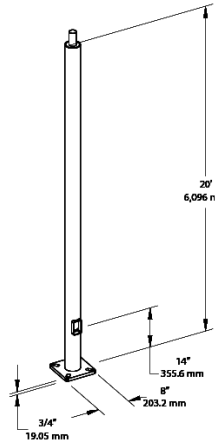

Features

- Designed for ground mounting
- Heavy duty TGIC polyester coating
- Reinforced hand holes with grounding lug and removable cover for easy wiring access
- Pole caps, base covers & bolts are sold separately
- Custom manufactured for each application

Ordering Matrix

Family	Shape	Size	Gauge	Height	Drilled/Welded Tenon
P	R	4	07	20	WT
	R = Round	4 = 4"	07 = 07	10 = 10'	D2 = Drilled
	TR = Tapered Round	5 = 5"	11 = 11	15 = 15'	WT = Welded Tenon
		6 = 6"		20 = 20'	
		7 = 7"		25 = 25'	
		8 = 8"		30 = 30'	