



Square steel poles with welded tenon included for use with floodlights. Designed for ground mounting. Poles are stocked nationwide for quick shipment. Protective packaging ensures poles arrive at the job site good as new.

Color: Bronze

Weight: 195.0 lbs

Project:	Type:
Prepared By:	Date:

Technical Specifications

Compliance

CSA Listed:

Suitable for wet locations

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Construction

Shaft:

46,000 p.s.i. minimum yield.

Hand Holes:

Reinforced with grounding lug and removable cover

Base Plates:

36,000 p.s.i. minimum yield.

Shipping Protection:

All poles are shipped in individual corrugated cartons to prevent finish damage

Color:

Bronze powder coating

Height:

20 ft

Gauge:

7

Wall Thickness:

3/16"

Shaft Size:

4"

Hand Hole Dimensions:

3" x 5"

Bolt Circle:

8 1/2"

Base Dimension:

8"

Weight:

225 lbs

Anchor Bolt:

Anchor bolt kits are sold separately. Order [ABK4-07-BC-S4](#) for anchor bolt kits.

Anchor Bolt Templates:

WARNING Template must be printed on 11" x 17" sheet for actual size. CHECK SCALE BEFORE USING. Templates shipped with anchor bolts and available [online](#).

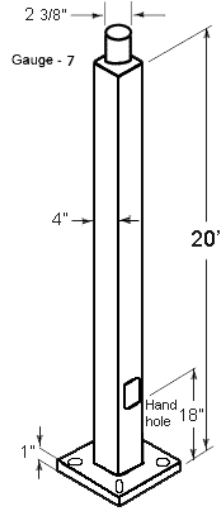
Max EPA's/Max Weights:

- 70MPH 15.7 ft/430 lb.
- 80MPH 10.7 ft/425lb.
- 90MPH 7.3 ft/420 lb.
- 100MPH 4.9 ft/400 lb.
- 110MPH 3.1 ft/395 lb.
- 120MPH 1.7 ft/395lb.
- 130MPH 0.7 ft/360 lb

Other

Terms of Sale:

Pole Terms of Sale is available [online](#).

Dimensions**Features**

- Designed for ground mounting
- Heavy duty TGIC polyester coating
- Reinforced hand holes with grounding lug and removable cover for easy wiring access
- Pole caps, base covers & bolts are sold separately
- Custom manufactured for each application