

Photometric Test Report

Relevant Standards

- ☒ IES LM-79-2008
- ☒ ANSI C82.77:2017

Prepared For

RAB Lighting Inc.

Room 6A33, No.1388, Wuzhong road, Shanghai, China

Xiao Xiang, 15921313292, Gary.Xiao@rabweb.com

Prepared By

Deliver Co., Ltd.

Block 11, 78 Keling Road, SSTP, Suzhou, China

0512-66801950, kevin.jia@szdeliver.com

Project Number

DLF2102103

Report Number

DLF2102103-1a

Test Date

2021/2/2

Issue Date

2021/2/5

Prepared By



Wangzun Zhu

Approved By



Kevin Jia

The results contained in this report pertain only to the tested sample.

This report shall not be reproduced, except in full, without written approval of Deliver Co., Ltd.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP.

1.0 Test Summary

DLC Technical Requirements v5.1

| Indoor - Troffer - 2x2 Luminaires for Ambient Lighting of Interior Commercial Spaces | | | | |
|--|---------------------------------|----------------------|----------------|------------|
| Requirement Category | Test Method | Requirements | | Test value |
| Luminaire Output (lm) (Goniophotometer - Section 4.2) | IES LM-79-2008 | 2000 | | 2227 |
| Minimum Luminaire Efficacy (lm/W) (Goniophotometer - Section 4.2) | IES LM-79-2008 | Standard 110 | Premium 125 | 123.4 |
| Power (Input Wattage) (W) (Goniophotometer - Section 4.2) | IES LM-79-2008 | Wrost Case | | 18.1 |
| Total Harmonic Distortion (A%) (THD & PF - section 4.3) | ANSI C82.77:2014 | 20.00% | 120V | 3.16% |
| | | 20.00% | 277V | 6.81% |
| Power Factor (THD & PF - section 4.3) | ANSI C82.77:2014 | 0.9 | 120V | 0.995 |
| | | 0.9 | 277V | 0.901 |
| Allowable CCTs* (K) (Integrating Sphere - Section 4.1) | IES LM-79-2008 | 7 step | 3465±245 | 3485 |
| | | 4 step | 3465±124 | |
| Minimum CRI (Integrating Sphere - Section 4.1) | IES LM-79-2008 CIE 13.3-1995 | ≥80 | | 84 |
| Minimum R9 (Integrating Sphere - Section 4.1) | IES LM-79-2008 CIE 13.3-1995 | ≥0 | | 8 |
| Minimum Rf (Integrating Sphere - Section 4.1) | ANSI/IES TM-30-18 | ≥70 | | 85 |
| Minimum Rg (Integrating Sphere - Section 4.1) | ANSI/IES TM-30-18 | ≥89 | | 95 |
| Minimum IES Rcs,h1 (Integrating Sphere - Section 4.1) | ANSI/IES TM-30-18 | -12%≤IES Rcs,h1≤+23% | | -12% |
| Zonal Lumen Requirement (0°-60°) (Goniophotometer - Section 4.2) | IES LM-79-2008 | ≥75% | | 76.95% |
| Corrected UGR (X=4H, Y=8H, 70/50/20%) (Goniophotometer - Section 4.2) | CIE 190-2010 | <22 | | 20.1 |
| SC: 0-180° (Goniophotometer - Section 4.2) | IES LM-79-2008 | 1.0-2.0 | | 1.28 |
| SC: 90-270° (Goniophotometer - Section 4.2) | IES LM-79-2008 | 1.0-2.0 | | 1.28 |
| Input Voltage (V) | | | | |
| (Goniophotometer - Section 4.2) | IES LM-79-2008 | Wrost Case | | 277 |
| (Goniophotometer - Section 4.2) | | Non-Wrost Case | | 120 |
| Input Current (A) | | | | |
| (Goniophotometer - Section 4.2) | IES LM-79-2008 | Wrost Case | | 0.073 |
| (Goniophotometer - Section 4.2) | | Non-Wrost Case | | 0.148 |
| Power (Input Wattage - W) | | | | |
| (Goniophotometer - Section 4.2) | IES LM-79-2008 | Wrost Case | | 18.1 |
| (Goniophotometer - Section 4.2) | | Non-Wrost Case | | 17.7 |

2.0 Test List

| Test Item | Test | Test Date | Model Number | Sample No. |
|-----------|-------------------------|-----------|----------------------------------|------------|
| 1 | Integrating Sphere Test | 2021/2/2 | SWISHFA-ISLAND 2x2 / 19W / 3500K | A1 |
| 2 | Goniophotometer Test | 2021/2/2 | SWISHFA-ISLAND 2x2 / 19W / 3500K | A1 |
| 3 | THD and PF Test | 2021/2/2 | SWISHFA-ISLAND 2x2 / 19W / 3500K | A1 |

Remark(If any)


- 1、 This report shall not be used by the client to claim product endorsement by NVLAP, NIST or any agency of the US government.
- 2、 The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.

3.0 Production Description

Luminaire Description: SWISHFA-ISLAND 2x2 / 19W / 3500K

Electrical Specification: 120V-277V,50/60HZ

Photos of Luminaire Characteristics

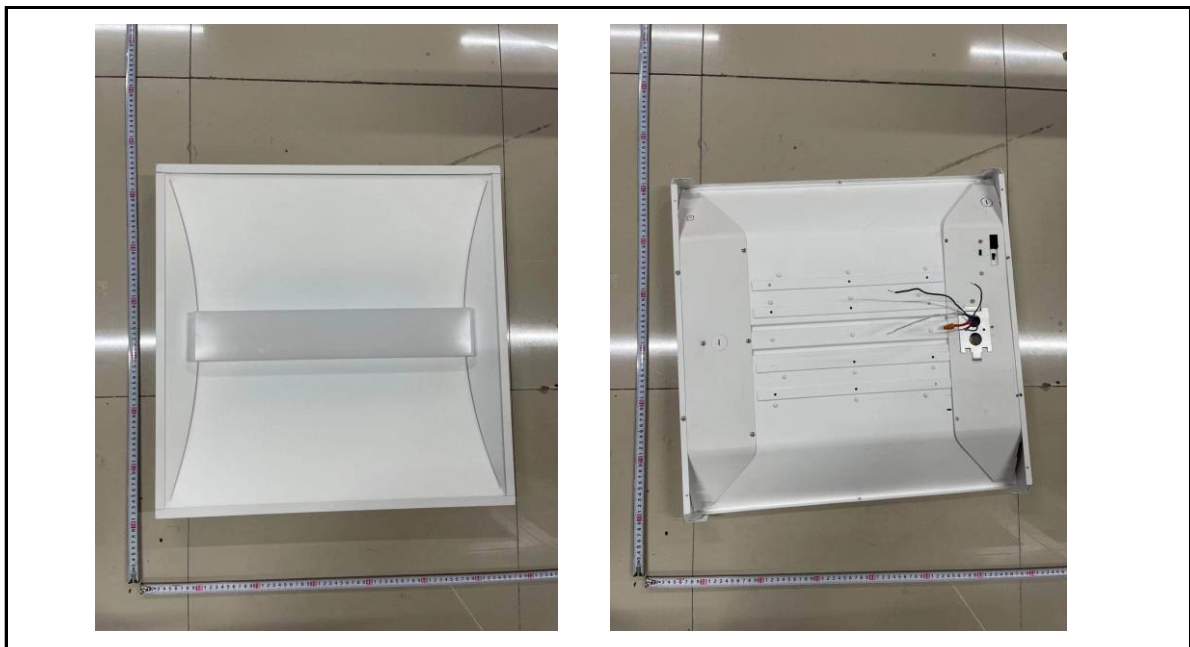

4.0 LM-79 Measurement and Test Results

4.1 Integrating Sphere Test

| | | | |
|---------------------|----------------------------------|---------------------------|------|
| Model No. | SWISHFA-ISLAND 2x2 / 19W / 3500K | Sample ID. | A1 |
| Operate time (Min.) | 90 | Stabilization time (Min.) | 45 |
| Temperature (°C) | 25.3 | Humidity (%RH) | 56.0 |

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$.

The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.

The sample was measured using 4π geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.

Test Result

| Voltage (Vac) | Frequency (Hz) | Current (A) | Power (W) | Power Factor |
|---------------|----------------|-------------|-----------|--------------|
| 120.09 | 60 | 0.148 | 17.7 | 0.995 |
| 277.01 | 60 | 0.073 | 18.2 | 0.901 |


Test Result

| CCT (K) | CRI | R9 | Duv |
|---------|-----|----|---------|
| 3485 | 84 | 8 | 0.00086 |

| Rf | Rg | IES Rcs,h1 |
|----|----|------------|
| 85 | 95 | -12% |

4.1 Integrating Sphere Test

Results

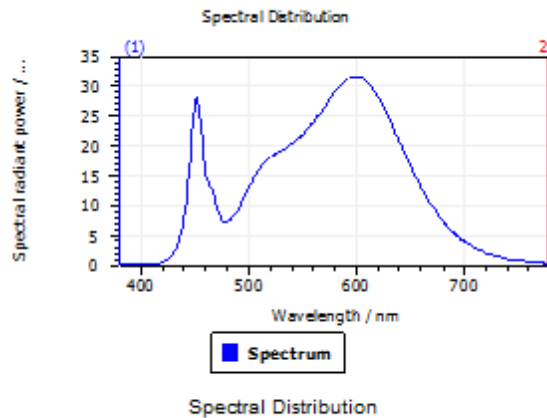


Spectral values

DominantWavelength 580.58 nm
Purity 0.403
PeakWavelength 598.85 nm
Radiant Power 5.049 W
Width50%:

Date: 2021/2/1 10:45:04


Color Coordinates

Correlated Color Temperatu 3485 K
x: 0.4071 u: 0.2357 u': 0.2357
y: 0.3936 v: 0.3418 v': 0.5127
CRI01 81.9 CRI09 8.0
CRI02 90.6 CRI10 78.3
CRI03 96.5 CRI11 82.1
CRI04 82.3 CRI12 65.2
CRI05 82.1 CRI13 84.0
CRI06 87.8 CRI14 98.6
CRI07 84.9 CRI15 74.6
CRI08 62.2 CRI16 71.8
ResultsCRI 83.5

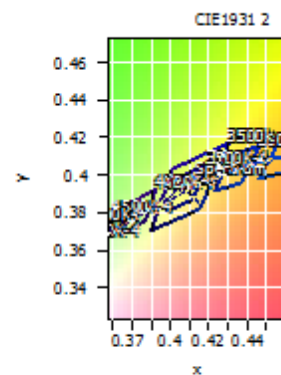

PlanckDistance 8.6E-004

4.1 Integrating Sphere Test

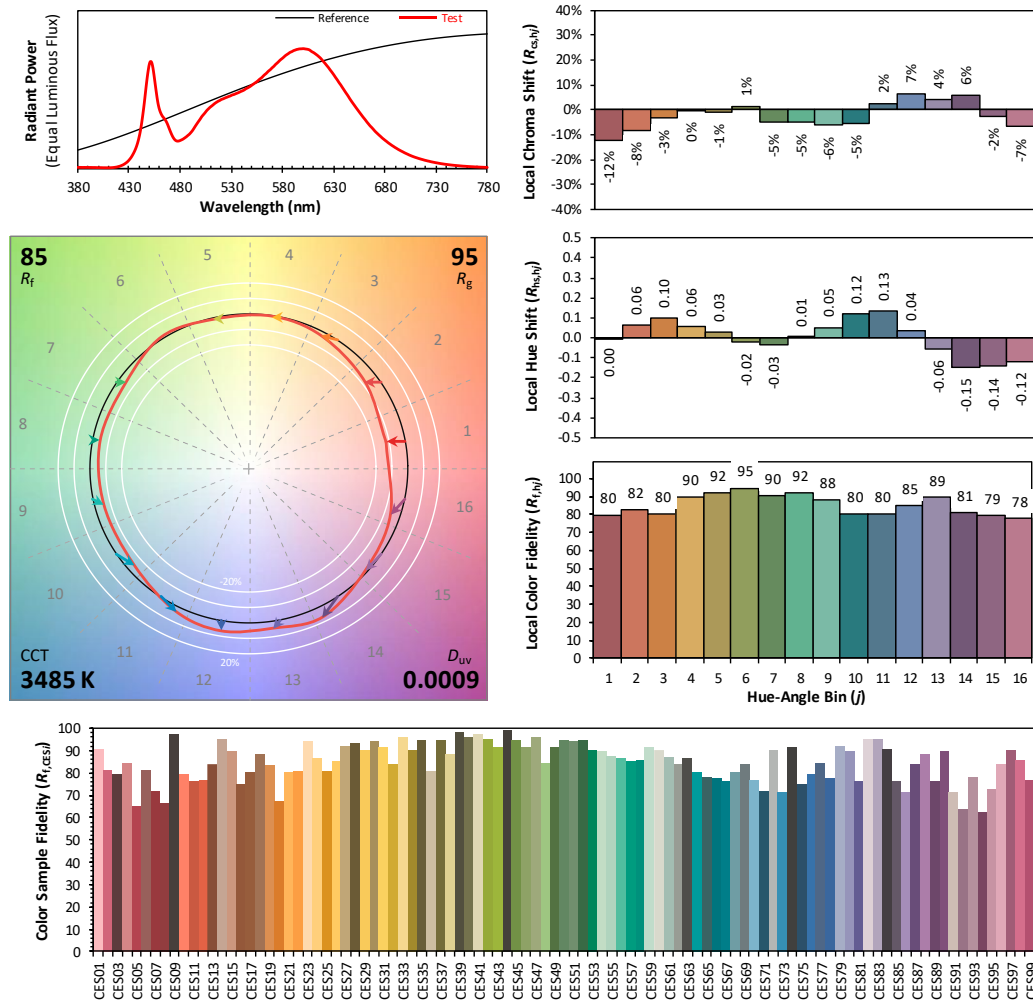

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.4070
 y 0.3936
 u' 0.2357
 v' 0.5127

CIE 13.3-1995
(CRI)
 R_a 83
 R_g 7

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.0

4.0 LM-79 Measurement and Test Results

4.2 Goniophotometer Test

| | | | |
|------------------------|-------------------------------------|------------------------------|------|
| Model No. | SWISHFA-ISLAND 2x2 / 19W / 3500K | Sample ID. | A1 |
| Opreate time (Min.) | 90 | Stabilization time (Min.) | 45 |
| Temperature (°C) | 25.3 | Humidity (%RH) | 54.0 |

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric paramters were measured using a type C goniophotometer and software.

The ambient temperature shall be maintained at 25° C ± 1° C, measured at a point not more than 1 m from the sample and at the same height as the sample.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ±0.2 percent under load.

The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 0.5° vertical intervals and 10° horizontal intervals.

Test Conditions

| Condition | Voltage (Vac) | Frequency (Hz) | Current (A) | Power (W) | Power Factor |
|-------------------|------------------|-------------------|----------------|-----------|-----------------|
| WROST CASE | 277.05 | 60 | 0.073 | 18.1 | 0.896 |
| NON-WROST CASE | 120.02 | 60 | 0.148 | 17.7 | 0.995 |


Test Result

| Flux (lm) | Field Angle(10%) | | Beam Angle(50%) | | Luminous Efficacy (lm/W) |
|--------------|------------------|---------|-----------------|---------|--------------------------------|
| | C0-180 | C90-270 | C0-180 | C90-270 | |
| 2227 | 167.4 | 162.1 | 115.5 | 116.3 | 123.4 |


| Zonal Lumen Requirement (0°-60°) | UGR (X=4H, Y=8H, 70/50/20%) | SC: 0-180° | SC: 90-270° |
|--|-----------------------------------|------------|-------------|
| 76.95% | 20.1 | 1.28 | 1.28 |

4.2 Goniophotometer Test

Light Distrubtion Curve

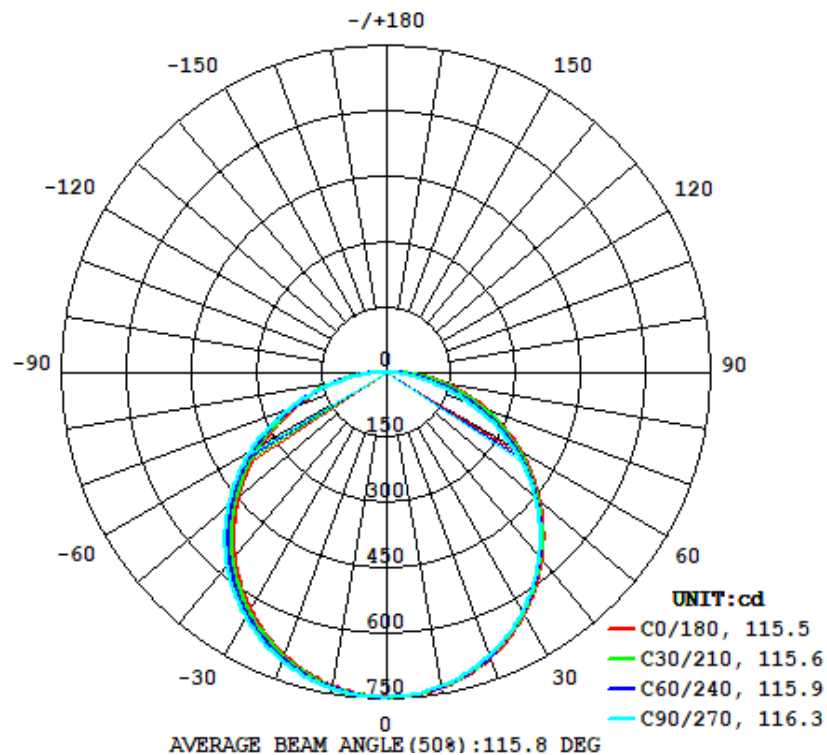

Isolux Plot

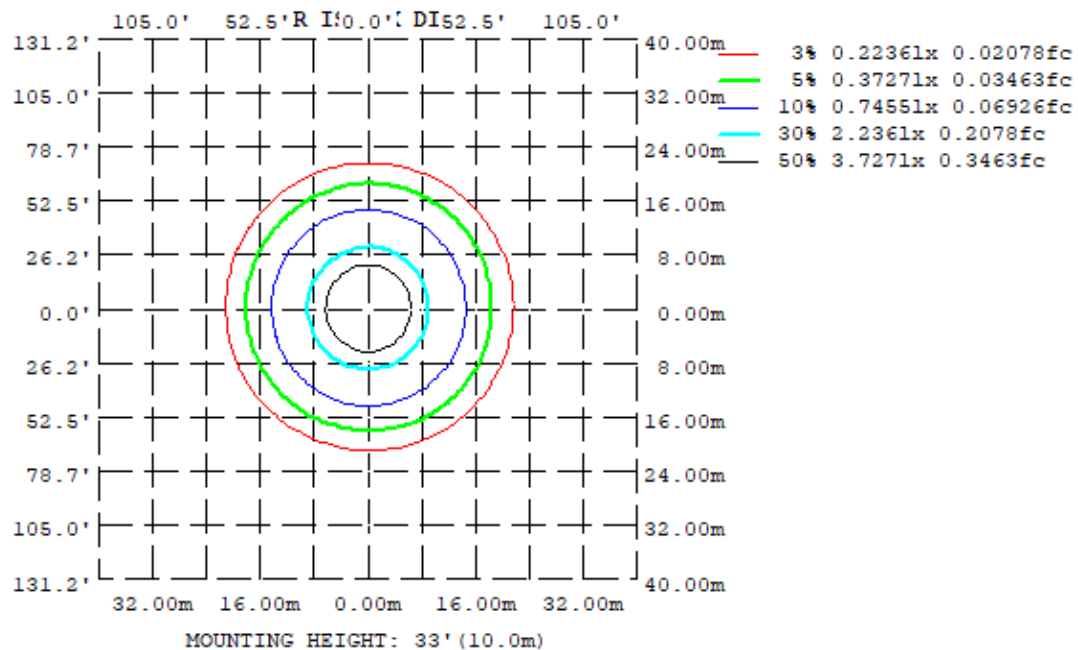

4.2 Goniophotometer Test

Zonal Lumen Summary

| γ | C0 | C45 | C90 | C135 | C180 | C225 | C270 | C315 |
|----------|-----------------------|-------|-------|-------|-------|-------|-------|-------|
| 10 | 734.4 | 732.8 | 730.5 | 729.9 | 730.9 | 734.0 | 737.2 | 737.2 |
| 20 | 698.1 | 694.5 | 692.0 | 689.6 | 691.4 | 697.7 | 704.7 | 704.0 |
| 30 | 639.8 | 634.2 | 632.1 | 626.6 | 628.4 | 638.7 | 649.7 | 647.5 |
| 40 | 561.0 | 554.3 | 551.4 | 543.3 | 545.9 | 559.0 | 573.7 | 570.6 |
| 50 | 465.4 | 457.4 | 452.2 | 444.0 | 447.4 | 461.9 | 478.0 | 476.2 |
| 60 | 358.6 | 347.4 | 335.9 | 331.0 | 336.7 | 350.3 | 365.1 | 367.3 |
| 70 | 244.3 | 228.5 | 203.6 | 209.4 | 221.0 | 230.9 | 234.4 | 248.6 |
| 80 | 130.7 | 107.8 | 73.98 | 89.67 | 108.1 | 109.1 | 102.2 | 125.7 |
| 90 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 100 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 110 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 120 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 130 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 140 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 150 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 160 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 170 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 180 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| DEG | LUMINOUS INTENSITY:cd | | | | | | | |

UGR Table - Corrected

UGR Table - Corrected

| | | | | | | | | | | | |
|----------------|----------------------|------|------|------|------|--------------------|------|------|------|------|--|
| Reflectances | | | | | | | | | | | |
| Ceiling Cavity | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 | |
| Walls | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 | |
| Floor Cavity | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | |
| Room Size | | | | | | | | | | | |
| X=2H Y=2H | UGR Viewed Crosswise | | | | | UGR Viewed Endwise | | | | | |
| | 14.7 | 16.4 | 15.1 | 16.7 | 17.0 | 14.4 | 16.0 | 14.7 | 16.3 | 16.7 | |
| 3H | 16.8 | 18.3 | 17.2 | 18.7 | 19.0 | 16.1 | 17.6 | 16.5 | 18.0 | 18.3 | |
| 4H | 17.7 | 19.1 | 18.1 | 19.5 | 19.8 | 16.8 | 18.2 | 17.2 | 18.5 | 18.9 | |
| 6H | 18.5 | 19.8 | 18.9 | 20.1 | 20.5 | 17.2 | 18.5 | 17.6 | 18.9 | 19.2 | |
| 8H | 18.8 | 20.0 | 19.2 | 20.4 | 20.8 | 17.3 | 18.5 | 17.7 | 18.9 | 19.3 | |
| 12H | 19.0 | 20.3 | 19.5 | 20.6 | 21.1 | 17.3 | 18.5 | 17.7 | 18.9 | 19.3 | |
| 4H 2H | 15.4 | 16.9 | 15.8 | 17.2 | 17.6 | 15.0 | 16.5 | 15.4 | 16.8 | 17.2 | |
| 3H | 17.8 | 19.0 | 18.2 | 19.4 | 19.8 | 17.0 | 18.2 | 17.4 | 18.6 | 19.0 | |
| 4H | 18.8 | 19.9 | 19.2 | 20.3 | 20.7 | 17.8 | 18.9 | 18.2 | 19.3 | 19.7 | |
| 6H | 19.7 | 20.7 | 20.2 | 21.1 | 21.6 | 18.3 | 19.3 | 18.8 | 19.7 | 20.2 | |
| 8H | 20.1 | 21.0 | 20.6 | 21.4 | 21.9 | 18.4 | 19.3 | 18.9 | 19.8 | 20.2 | |
| 12H | 20.4 | 21.3 | 20.9 | 21.7 | 22.2 | 18.5 | 19.3 | 19.0 | 19.8 | 20.2 | |
| 8H 4H | 19.1 | 20.0 | 19.6 | 20.5 | 20.9 | 18.2 | 19.1 | 18.6 | 19.5 | 20.0 | |
| 6H | 20.3 | 21.0 | 20.7 | 21.5 | 22.0 | 18.8 | 19.6 | 19.3 | 20.1 | 20.5 | |
| 8H | 20.8 | 21.4 | 21.3 | 21.9 | 22.4 | 19.0 | 19.7 | 19.5 | 20.2 | 20.7 | |
| 12H | 21.2 | 21.8 | 21.7 | 22.3 | 22.9 | 19.1 | 19.7 | 19.6 | 20.2 | 20.7 | |
| 12H 4H | 19.2 | 20.0 | 19.7 | 20.5 | 20.9 | 18.2 | 19.0 | 18.7 | 19.5 | 20.0 | |
| 6H | 20.3 | 21.0 | 20.8 | 21.5 | 22.0 | 18.9 | 19.6 | 19.4 | 20.1 | 20.6 | |
| 8H | 20.9 | 21.5 | 21.4 | 22.0 | 22.6 | 19.1 | 19.8 | 19.7 | 20.2 | 20.8 | |

Maximum UGR = 22.9

4.2 Goniophotometer Test

ZONAL LUMEN SUMMARY

| | Zonal (lm) | | Total (lm) | Percent |
|---------|------------|---------|------------|---------|
| 0-10 | 70.60 | 0 - 10 | 70.60 | 3.17% |
| 10-20 | 202.65 | 0 - 20 | 273.25 | 12.27% |
| 20-30 | 308.64 | 0 - 30 | 581.89 | 26.13% |
| 30-40 | 375.17 | 0 - 40 | 957.06 | 42.97% |
| 40-50 | 393.96 | 0 - 50 | 1351.02 | 60.66% |
| 50-60 | 362.82 | 0 - 60 | 1713.84 | 76.95% |
| 60-70 | 285.68 | 0 - 70 | 1999.52 | 89.77% |
| 70-80 | 175.34 | 0 - 80 | 2174.86 | 97.65% |
| 80-90 | 52.41 | 0 - 90 | 2227.27 | 100.00% |
| 90-100 | 0.00 | 0 - 100 | 2227.27 | 100.00% |
| 100-110 | 0.00 | 0 - 110 | 2227.27 | 100.00% |
| 110-120 | 0.00 | 0 - 120 | 2227.27 | 100.00% |
| 120-130 | 0.00 | 0 - 130 | 2227.27 | 100.00% |
| 130-140 | 0.00 | 0 - 140 | 2227.27 | 100.00% |
| 140-150 | 0.00 | 0 - 150 | 2227.27 | 100.00% |
| 150-160 | 0.00 | 0 - 160 | 2227.27 | 100.00% |
| 160-170 | 0.00 | 0 - 170 | 2227.27 | 100.00% |
| 170-180 | 0.00 | 0 - 180 | 2227.27 | 100.00% |

4.2 Goniophotometer Test


COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

| RC | 80 | | | | 70 | | | | 50 | | | 30 | | | 10 | | | 0 |
|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1 | 108 | 103 | 99 | 95 | 106 | 101 | 97 | 93 | 97 | 93 | 90 | 93 | 90 | 88 | 89 | 87 | 85 | 83 |
| 2 | 98 | 90 | 83 | 77 | 95 | 88 | 81 | 76 | 84 | 79 | 74 | 81 | 76 | 72 | 78 | 74 | 71 | 68 |
| 3 | 89 | 78 | 70 | 63 | 87 | 77 | 69 | 63 | 74 | 67 | 62 | 71 | 65 | 61 | 68 | 64 | 59 | 57 |
| 4 | 82 | 69 | 60 | 53 | 79 | 68 | 60 | 53 | 65 | 58 | 52 | 63 | 57 | 52 | 61 | 55 | 51 | 49 |
| 5 | 75 | 62 | 53 | 46 | 73 | 61 | 52 | 46 | 59 | 51 | 45 | 57 | 50 | 45 | 55 | 49 | 44 | 42 |
| 6 | 69 | 56 | 46 | 40 | 67 | 55 | 46 | 40 | 53 | 45 | 39 | 51 | 44 | 39 | 49 | 43 | 39 | 36 |
| 7 | 64 | 50 | 41 | 35 | 62 | 49 | 41 | 35 | 48 | 40 | 35 | 46 | 40 | 34 | 45 | 39 | 34 | 32 |
| 8 | 60 | 46 | 37 | 31 | 58 | 45 | 37 | 31 | 44 | 36 | 31 | 43 | 36 | 31 | 41 | 35 | 31 | 29 |
| 9 | 56 | 42 | 34 | 28 | 54 | 41 | 33 | 28 | 40 | 33 | 28 | 39 | 33 | 28 | 38 | 32 | 28 | 26 |
| 10 | 52 | 39 | 31 | 25 | 51 | 38 | 31 | 25 | 37 | 30 | 25 | 36 | 30 | 25 | 35 | 29 | 25 | 23 |

CONE OF LIGHT DIAGRAM

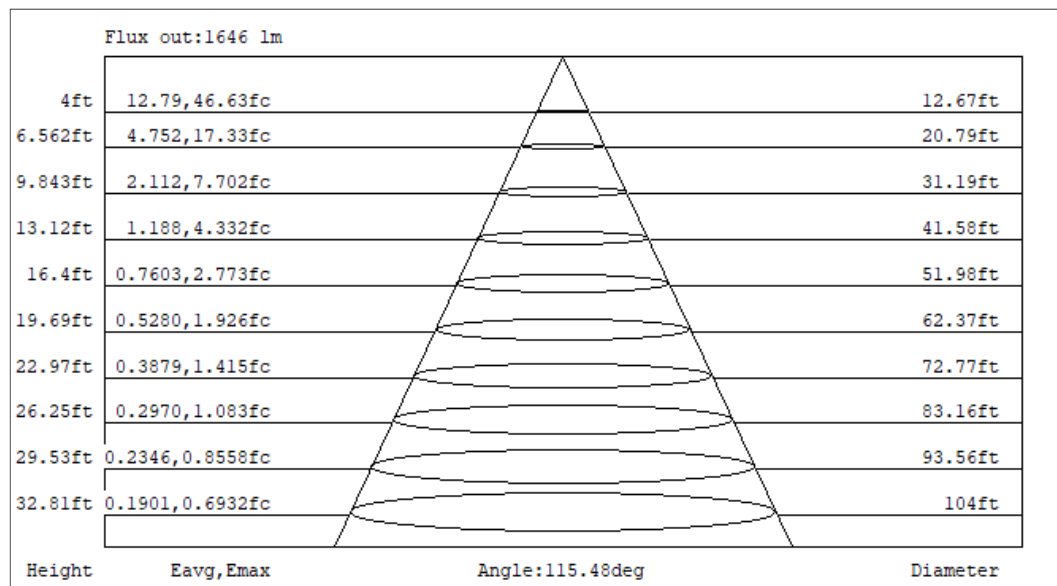

4.0 LM-79 Measurement and Test Results

4.3 THD and PF Test

| | | | |
|---------------------|-------------------------------------|-------------------|------|
| Model No. | SWISHFA-ISLAND 2x2 / 19W / 3500K | Sample ID. | A1 |
| Temperature (°C) | 25.3 | Humidity (%RH) | 56.0 |

Test Method

The samples were tested according to the ANSI C82.77:2002.

The total harmonic distortion shall be measured to the 40th order.

The ambient temperature condition was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$. The sample measurements were made using a digital power meter and power supply. The sample was operated at rated voltage and was stabilized before measurement. The total harmonic distortion were calculated.

Test Results

| Voltage (Vac) | Frequency (Hz) | Current (A) | Power (W) | Power Factor | THD |
|------------------|-------------------|-------------|-----------|--------------|-------|
| 120.09 | 60 | 0.148 | 17.7 | 0.995 | 3.16% |
| 277.01 | 60 | 0.073 | 18.2 | 0.901 | 6.81% |

5.0 Equipment Information

| Test Equipment | | | |
|----------------|---|-----------------------|----------------------|
| Equipment ID | Equipment Name | Last Calibration Date | Calibration Due Date |
| DLF107 | Integrating Sphere System | 2020/12/26 | 2021/12/25 |
| DLF108 | Auxiliary Lamp | 2020/12/26 | 2021/12/25 |
| DLF122 | Measurement Standard Lamp Standard Lamp Type: 220 V, 0.4720 A, Tungsten, Omni-derectional | 2020/12/26 | 2021/12/25 |
| DLF116 | AC Power Source | 2020/12/26 | 2021/12/25 |
| DLF113 | Power Meter | 2020/12/26 | 2021/12/25 |
| DLF112 | Temperature Recorder | 2020/12/26 | 2021/12/25 |
| DLF114 | Temperature & Humidity Datalogger | 2020/12/26 | 2021/12/25 |
| DLF101 | Goniophotometer | 2020/12/26 | 2021/12/25 |
| DLF125 | Standard Lamp Standard Lamp Type: 76.58 V, 6.7875 A, Tungsten, Omni-derectional | 2020/12/26 | 2021/12/25 |
| DLF104 | AC Power Source | 2020/12/26 | 2021/12/25 |
| DLF507 | DC Power Source | 2020/12/26 | 2021/12/25 |
| DLF102 | Power Meter | 2020/12/26 | 2021/12/25 |
| DLF111 | Temperature & Humidity Datalogger | 2020/12/26 | 2021/12/25 |
| DLF119 | Power Meter | 2020/12/26 | 2021/12/25 |
| DLF031 | Temperature data logger | 2020/12/26 | 2021/12/25 |
| DLF022 | Digital power meter | 2020/12/26 | 2021/12/25 |
| DLF003 | Temperature & Humidity Datalogger | 2020/12/26 | 2021/12/25 |

***** End of Test Report*****