

# Photometric Test Report

## Relevant Standards

- ☒ IES LM-79-2008
- ☒ ANSI C82.77:2017

## Prepared For

**RAB Lighting Inc.**

Room 6A33, No.1388, Wuzhong road, Shanghai, China

Xiao Xiang, 15921313292, Gary.Xiao@rabweb.com

## Prepared By

**Deliver Co., Ltd.**

Block 11, 78 Keling Road, SSTP, Suzhou, China

0512-66801950, kevin.jia@szdeliver.com

## Project Number

**DLF2207110**

## Report Number

**DLF2207110-4a**

## Test Date

**2022/7/30**

## Issue Date

**2022/7/31**

## Prepared By



Wangzun Zhu

## Approved By



Kevin Jia

The results contained in this report pertain only to the tested sample.

This report shall not be reproduced, except in full, without written approval of Deliver Co., Ltd.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP.

## 1.0 Test Summary

DLC Technical Requirements v5.1

Indoor - Linear Ambient - Direct Linear Ambient Luminaires				
Requirement Category	Test Method	Requirements		Test value
Luminaire Output (lm) (Goniophotometer - Section 4.2)	IES LM-79-2008	1500		1697
Lumen/ft (Goniophotometer - Section 4.2)	IES LM-79-2008	≥375		848
Minimum Luminaire Efficacy (lm/W) (Goniophotometer - Section 4.2)	IES LM-79-2008	Standard 115	Premium 130	134.6
Power (Input Wattage) (W) (Goniophotometer - Section 4.2)	IES LM-79-2008	Wrost Case		12.6
Total Harmonic Distortion (A%) (THD & PF - section 4.3)	ANSI C82.77:2014	20.00%	120V	7.77%
		20.00%	277V	6.23%
Power Factor (THD & PF - section 4.3)	ANSI C82.77:2014	0.9	120V	0.996
		0.9	277V	0.937
Allowable CCTs* (K) (Integrating Sphere - Section 4.1)	IES LM-79-2008	7 step	5029±355	5129
		4 step	5029±220	
Minimum CRI (Integrating Sphere - Section 4.1)	IES LM-79-2008 CIE 13.3-1995	≥80		81
Minimum R9 (Integrating Sphere - Section 4.1)	IES LM-79-2008 CIE 13.3-1995	≥0		-2
Minimum Rf (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥70		83
Minimum Rg (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥89		94
Minimum IES Rcs,h1 (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	-12%≤IES Rcs,h1≤+23%		-14%
Zonal Lumen Requirement (0°-60°) (Goniophotometer - Section 4.2)	IES LM-79-2008	≥40%		48.90%
Corrected UGR (X=4H, Y=8H, 70/50/20%) (Goniophotometer - Section 4.2)	CIE 190-2010	<22		22.4
Input Voltage (V)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Wrost Case		277
(Goniophotometer - Section 4.2)		Non-Wrost Case		120
Input Current (A)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Wrost Case		0.049
(Goniophotometer - Section 4.2)		Non-Wrost Case		0.099
Power (Input Wattage - W)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Wrost Case		12.6
(Goniophotometer - Section 4.2)		Non-Wrost Case		11.8

## 2.0 Test List

Test Item	Test	Test Date	Model Number	Sample No.
1	Integrating Sphere Test	2022/7/30	TOMO-2/12W/5000K	D1
2	Goniophotometer Test	2022/7/30	TOMO-2/12W/5000K	D1
3	THD and PF Test	2022/7/30	TOMO-2/12W/5000K	D1

### Remark(If any)


- 1、 This report shall not be used by the client to claim product endorsement by NVLAP, NIST or any agency of the US government.
- 2、 The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.

## 3.0 Production Description

**Luminaire Description:** TOMO-2/12W/5000K

**Electrical Specification:** 120V-277V,50/60HZ

### Photos of Luminaire Characteristics

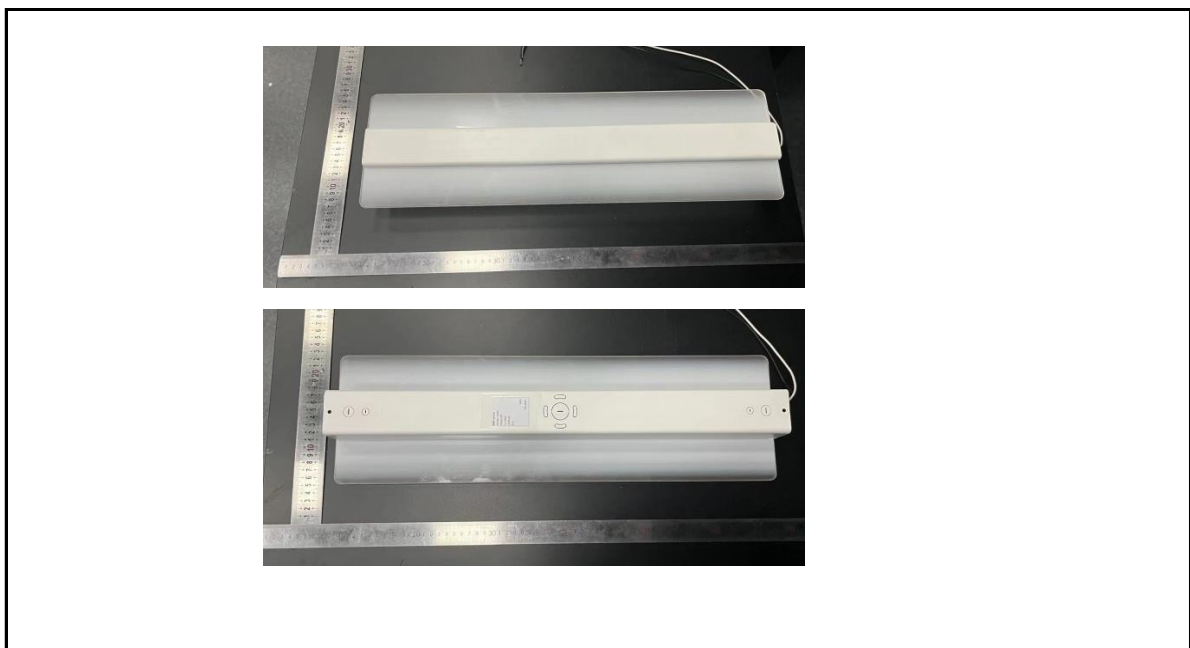

## 4.0 LM-79 Measurement and Test Results

### 4.1 Integrating Sphere Test

Model No.	TOMO-2/12W/5000K	Sample ID.	D1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.3	Humidity (%RH)	56.0

#### Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at  $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$ .

The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within  $\pm 0.2$  percent under load.

The sample was measured using  $4\pi$  geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.

#### Test Result

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
119.95	60	0.098	11.7	0.996
277.00	60	0.048	12.5	0.937


#### Test Result

CCT (K)	CRI	R9	Duv
5129	81	-2	0.006

Rf	Rg	IES Rcs,h1
83	94	-14%

## 4.1 Integrating Sphere Test

### Results

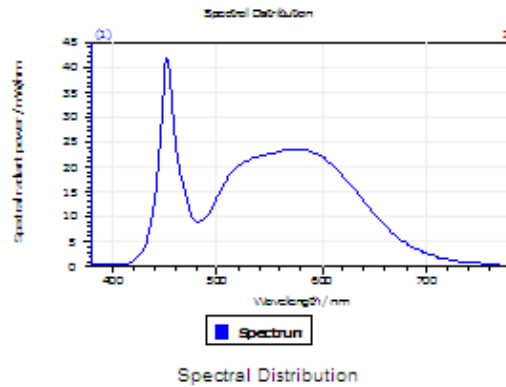


#### Spectral values

DominantWavelength 565.85 nm  
Purity 0.113  
PeakWavelength 452.23 nm  
Radiant Power 4.596 W  
Width50%:

#### Color Coordinates

Correlated Color Temperat 5129 K  
x: 0.3425 u: 0.2059 u': 0.2059  
y: 0.3616 v: 0.3260 v': 0.4891  
CRI01 78.4 CRI09 -1.7  
CRI02 86.6 CRI10 68.2  
CRI03 92.3 CRI11 78.4  
CRI04 79.8 CRI12 55.2  
CRI05 78.8 CRI13 80.6  
CRI06 81.2 CRI14 96.0  
CRI07 86.7 CRI15 71.8  
CRI08 64.5 CRI16 70.1  
ResultsCRI 81.0



PlanckDistance 6.0E-003

## 4.1 Integrating Sphere Test







### IES TM-30-18 Color Rendition Report

Source: DLF2207110-4a

Manufacturer: RAB Lighting Inc.

Date: 2022/7/30

Model: TOMO-2/12W/5000K

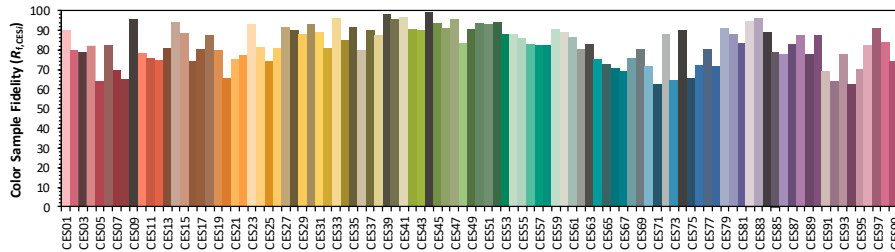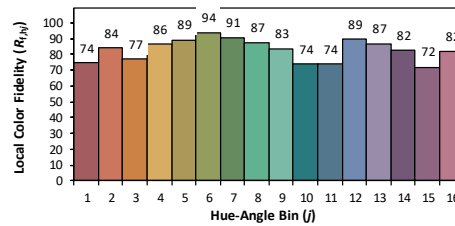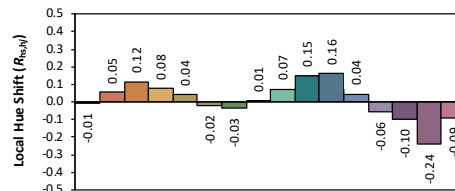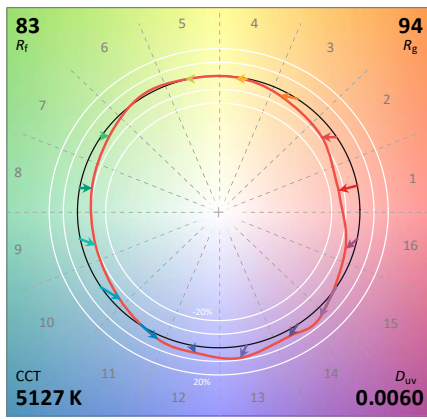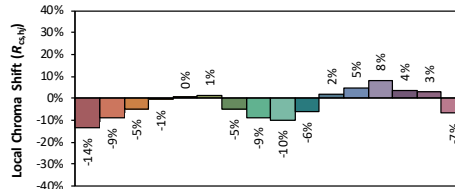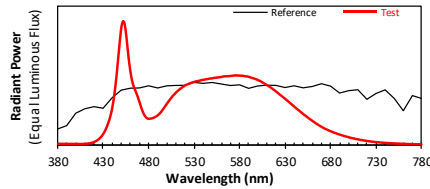

**Notes:** This is a recommended method for displaying ANSI/IES TM-30-18 information.

$x$  0.3425  
 $y$  0.3616  
 $u'$  0.2059  
 $v'$  0.4891

CIE 13.3-1995  
(CRI)

$R_a$  81  
 $R_g$  -1

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.0

## 4.0 LM-79 Measurement and Test Results

### 4.2 Goniophotometer Test

Model No.	TOMO-2/12W/5000K	Sample ID.	D1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.3	Humidity (%RH)	54.0

#### Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using a type C goniophotometer and software.

The ambient temperature shall be maintained at  $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$ , measured at a point not more than 1 m from the sample and at the same height as the sample.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within  $\pm 0.2$  percent under load.

The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at  $0.5^{\circ}$  vertical intervals and  $10^{\circ}$  horizontal intervals.

#### Test Conditions

Condition	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
WROST CASE	277.00	60	0.049	12.6	0.935
NON-WROST CASE	120.03	60	0.099	11.8	0.996


#### Test Result

Flux (lm)	Field Angle(10%)		Beam Angle(50%)		Luminous Efficacy (lm/W)
	C0-180	C90-270	C0-180	C90-270	
1697	358.1	360.0	153.9	137.5	134.6


Zonal Lumen Requirement ( $0^{\circ}$ - $60^{\circ}$ )	UGR (X=4H, Y=8H, 70/50/20%)	Length(ft)	Lumen/ft
48.90%	22.4	2.00	848

## 4.2 Goniophotometer Test

### Light Distrubtion Curve

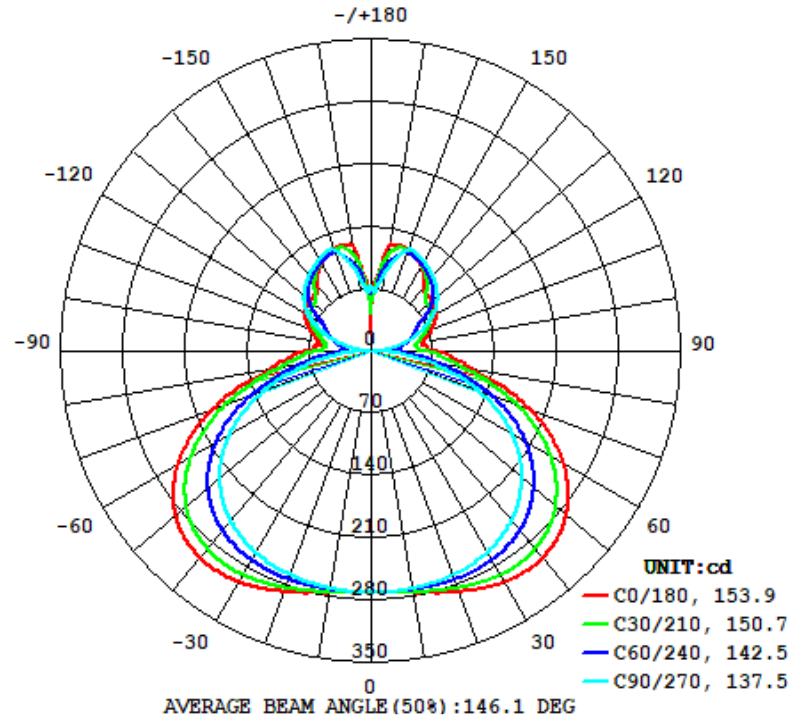

### Isolux Plot

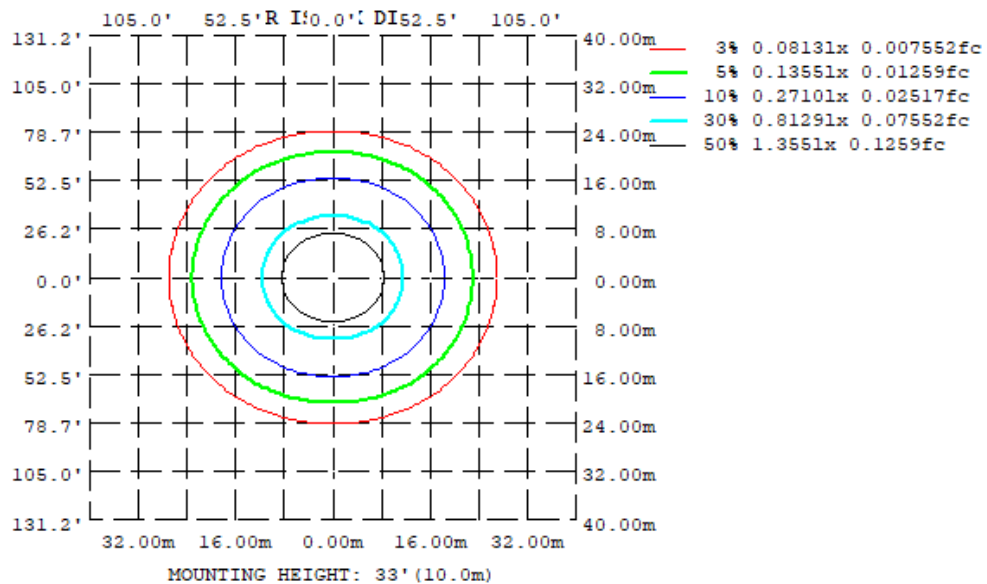



## 4.2 Goniophotometer Test

### Zonal Lumen Summary

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315
10	276.1	273.3	270.8	273.3	276.1	273.3	270.8	273.3
20	287.8	278.1	268.1	278.1	287.8	278.1	268.1	278.1
30	299.8	280.9	261.4	280.9	299.8	280.9	261.4	280.9
40	302.3	276.1	247.8	276.1	302.3	276.1	247.8	276.1
50	287.8	256.8	223.3	256.8	287.8	256.8	223.3	256.8
60	251.0	218.0	184.1	218.0	251.0	218.0	184.1	218.0
70	190.0	159.6	127.9	159.6	190.0	159.6	127.9	159.6
80	113.9	91.86	59.74	91.86	113.9	91.86	59.74	91.86
90	71.22	45.88	4.050	45.88	71.22	45.88	4.050	45.88
100	59.53	45.39	21.89	45.39	59.53	45.39	21.89	45.39
110	74.18	59.01	54.18	59.01	74.18	59.01	54.18	59.01
120	85.81	71.40	81.86	71.40	85.81	71.40	81.86	71.40
130	90.64	82.49	99.36	82.49	90.64	82.49	99.36	82.49
140	94.94	104.3	110.6	104.3	94.94	104.3	110.6	104.3
150	113.5	115.2	119.1	115.2	113.5	115.2	119.1	115.2
160	122.6	121.3	120.9	121.3	122.6	121.3	120.9	121.3
170	120.2	100.8	88.50	100.8	120.2	100.8	88.50	100.8
180	21.27	57.25	73.10	57.25	21.27	57.25	73.10	57.25
DEG	LUMINOUS INTENSITY:cd							

### UGR Table - Corrected

#### UGR Table - Corrected

Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	14.4	15.6	15.1	16.4	17.3	16.0	17.2	16.7	18.0	18.9
	3H	16.5	17.6	17.3	18.4	19.4	18.5	19.6	19.3	20.4	21.3
	4H	17.4	18.4	18.1	19.2	20.1	19.6	20.6	20.4	21.4	22.4
	6H	18.0	19.0	18.7	19.7	20.7	20.5	21.5	21.3	22.3	23.3
	8H	18.2	19.1	19.0	19.9	20.9	21.1	22.0	21.9	22.8	23.8
	12H	18.3	19.2	19.1	20.0	21.0	21.6	22.5	22.4	23.3	24.3
4H	2H	15.4	16.5	16.2	17.2	18.2	16.6	17.6	17.4	18.4	19.4
	3H	17.7	18.6	18.5	19.4	20.4	19.3	20.2	20.1	21.0	22.0
	4H	18.7	19.5	19.4	20.3	21.3	20.6	21.4	21.4	22.2	23.2
	6H	19.4	20.1	20.2	21.0	22.0	21.7	22.5	22.5	23.3	24.3
	8H	19.7	20.3	20.5	21.2	22.2	22.4	23.0	23.2	23.9	24.9
	12H	19.8	20.4	20.7	21.3	22.3	23.1	23.7	23.9	24.5	25.6
8H	4H	19.3	20.0	20.1	20.8	21.8	20.9	21.6	21.7	22.4	23.4
	6H	20.2	20.8	21.1	21.7	22.7	22.3	22.8	23.1	23.7	24.7
	8H	20.6	21.1	21.4	22.0	23.0	23.1	23.6	23.9	24.5	25.5
	12H	20.8	21.3	21.7	22.2	23.2	24.0	24.4	24.8	25.3	26.4
12H	4H	19.4	20.0	20.2	20.9	21.9	20.9	21.5	21.8	22.4	23.4
	6H	20.5	21.0	21.3	21.8	22.9	22.4	22.9	23.2	23.7	24.8
	8H	20.9	21.4	21.8	22.2	23.3	23.3	23.7	24.1	24.6	25.7

Maximum UGR = 26.4

## 4.2 Goniophotometer Test

### ZONAL LUMEN SUMMARY


	Zonal (lm)		Total (lm)	Percent
0-10	26.00	0 - 10	26.00	1.53%
10-20	78.22	0 - 20	104.22	6.14%
20-30	129.56	0 - 30	233.78	13.78%
30-40	175.25	0 - 40	409.03	24.11%
40-50	206.76	0 - 50	615.79	36.30%
50-60	213.82	0 - 60	829.61	48.90%
60-70	188.45	0 - 70	1018.06	60.01%
70-80	130.52	0 - 80	1148.58	67.70%
80-90	69.15	0 - 90	1217.73	71.78%
90-100	44.02	0 - 100	1261.75	74.37%
100-110	53.50	0 - 110	1315.25	77.52%
110-120	68.20	0 - 120	1383.45	81.54%
120-130	75.05	0 - 130	1458.50	85.97%
130-140	74.09	0 - 140	1532.59	90.33%
140-150	68.56	0 - 150	1601.15	94.38%
150-160	54.63	0 - 160	1655.78	97.60%
160-170	32.67	0 - 170	1688.45	99.52%
170-180	8.13	0 - 180	1696.58	100.00%

## 4.2 Goniophotometer Test

### COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	76	76	76	72
1	101	95	90	86	95	90	86	82	81	77	74	72	69	67	64	62	60	56
2	90	82	74	68	85	77	71	65	69	64	59	62	57	54	55	51	48	45
3	82	71	62	55	77	67	59	53	60	54	48	53	48	44	47	43	40	36
4	74	62	53	46	70	59	50	44	52	46	40	47	41	37	42	37	33	30
5	68	55	45	39	64	52	43	37	46	39	34	42	36	31	37	32	28	25
6	62	49	40	33	58	46	38	32	42	34	29	37	31	27	33	28	24	22
7	57	44	35	29	54	42	33	28	37	30	25	34	28	23	30	25	21	19
8	53	40	31	25	50	38	30	24	34	27	22	31	25	21	27	22	19	17
9	49	36	28	22	47	34	27	21	31	24	20	28	22	18	25	20	17	15
10	46	33	25	20	44	31	24	19	29	22	18	26	20	16	23	18	15	13

### CONE OF LIGHT DIAGRAM

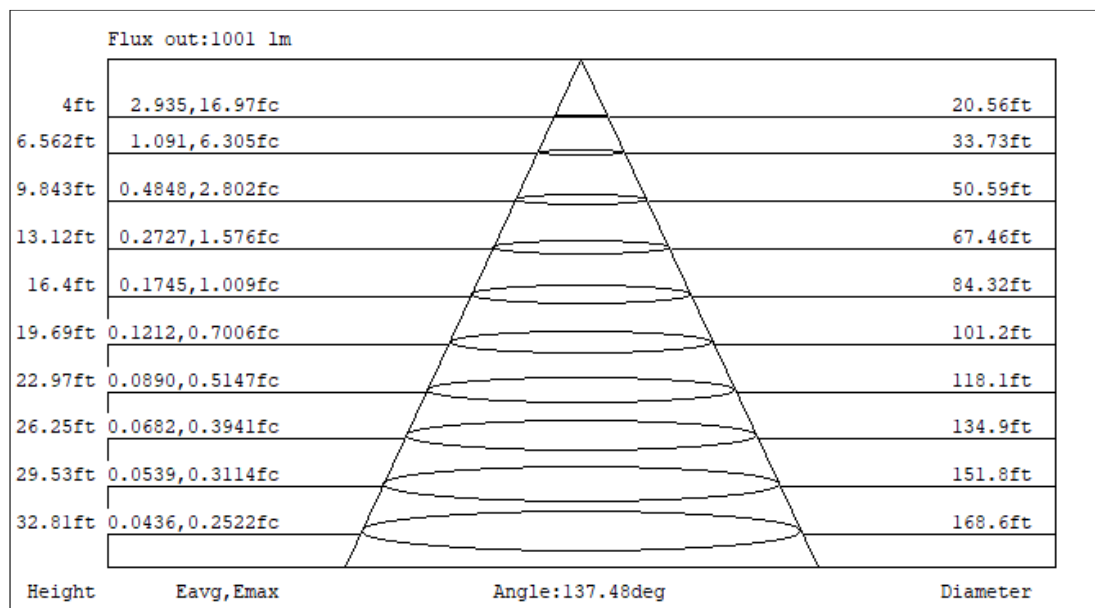

## 4.0 LM-79 Measurement and Test Results

### 4.3 THD and PF Test

Model No.	TOMO-2/12W/5000K	Sample ID.	D1
Temperature (°C)	25.3	Humidity (%RH)	56.0

#### Test Method

The samples were tested according to the ANSI C82.77:2002.

The total harmonic distortion shall be measured to the 40th order.

The ambient temperature condition was maintained at  $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$ . The sample measurements were made using a digital power meter and power supply. The sample was operated at rated voltage and was stabilized before measurement. The total harmonic distortion were calculated.

#### Test Results

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	THD
119.95	60	0.098	11.7	0.996	7.77%
277.00	60	0.048	12.5	0.937	6.23%

## 5.0 Equipment Information

Test Equipment			
Equipment ID	Equipment Name	Last Calibration Date	Calibration Due Date
DLF107	Integrating Sphere System	2021/12/26	2022/12/25
DLF108	Auxiliary Lamp	2021/12/26	2022/12/25
DLF122	Measurement Standard Lamp Standard Lamp Type: 220 V, 0.4720 A, Tungsten, Omni-derectional	2021/12/26	2022/12/25
DLF116	AC Power Source	2021/12/26	2022/12/25
DLF113	Power Meter	2021/12/26	2022/12/25
DLF112	Temperature Recorder	2021/12/26	2022/12/25
DLF114	Temperature & Humidity Datalogger	2021/12/26	2022/12/25
DLF101	Goniophotometer	2021/12/26	2022/12/25
DLF125	Standard Lamp Standard Lamp Type: 76.58 V, 6.7875 A, Tungsten, Omni-derectional	2021/12/26	2022/12/25
DLF104	AC Power Source	2021/12/26	2022/12/25
DLF507	DC Power Source	2021/12/26	2022/12/25
DLF102	Power Meter	2021/12/26	2022/12/25
DLF111	Temperature & Humidity Datalogger	2021/12/26	2022/12/25
DLF119	Power Meter	2021/12/26	2022/12/25
DLF031	Temperature data logger	2021/12/26	2022/12/25
DLF022	Digital power meter	2021/12/26	2022/12/25
DLF003	Temperature & Humidity Datalogger	2021/12/26	2022/12/25

\*\*\*\*\* End of Test Report\*\*\*\*\*