

**LM-79-08 Test Report**  
For  
**RAB LIGHTING INC**

**(Brand Name: N/A)**

408 W 14th St, New York, NY 10014, USA

**Model name(s):**  
**WFD34-6**

**Report Type:** Testing and Report According to IES LM-79-2008

**Type of  
Luminaire:** Downlights

**Report Date:** 2025-05-09

**Prepared By:**

Test & Report By:



Engineer: Sun Fangfang

Review By:



Manager: Huang Qichong

<b>1.1 Rated Values:</b>	
Rated Voltage / Frequency	120Vac, 60 Hz
Nominal Power	9.5W
Rated Initial Lamp Lumen	800lm (mode 2700K)
Declared CCT	2700K/3000K/3500K/4000K/5000K

### 1.2 Test Specifications:

Test item	<ol style="list-style-type: none"> <li>1. Total Luminous Flux</li> <li>2. Luminous Distribution Intensity</li> <li>3. Luminous Efficacy</li> <li>4. Correlated Color Temperature</li> <li>5. Color Rendering Index</li> <li>6. Chromaticity Coordinate</li> <li>7. Electrical Parameters</li> </ol>
Reference Standard	<ol style="list-style-type: none"> <li>1. IES LM-79-2008 Electrical and Photometric Measurements of Solid-State Lighting Products</li> <li>2. ANSI C78.377-2015 Specifications for the Chromaticity of Solid State Lighting Products</li> <li>3. CIE 13.3-1995 Method of Measuring and Specifying Colour Rendering Properties of Light Sources</li> <li>4. CIE 15-2004 Technical Report Colorimetry</li> <li>5. IESNA LM-16-93 Practical Guide to Colorimetry of Light Source</li> <li>6. IESNA TM-16-05 Technical Memorandum on Light Emitting Diode (LED) Sources and Systems</li> </ol>
Reference Work Instruction	QD25

### 1.3 Test Methods

<p><b>1) Photometric and Light Distribution Measurement – Goniophotometer Method:</b> Photometric parameters were measured using the goniophotometer and software. The ambient temperature shall be maintained at 25°C ±1°C, measured at a point not more than 1 m from the sample and at the same height as the sample. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 1°vertical intervals and 22.5°horizontal intervals.</p>
<p><b>2) Chromaticity Measurement – Sphere-Spectroradiometer Method:</b> Chromaticity parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at 25°C ±1°C. The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral power distribution taken at 5 nm intervals over the range of 380 to 780 nm</p>
<p><b>3) Electrical Measurements:</b> Electrical parameters were measured using power meters incorporated in goniophotometer or sphere-spectroradiometer system. The ambient temperature surrounding the sample was maintained at 25°C ±1°C. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Voltage, frequency, current, power, power factor and total harmonic distortion were measured by and read from the power meter.</p>

**2.1.1 Electrical, Photometric and Chromaticity Measurements**

<b>Test date</b>	2025-05-07	<b>Test Ambient:</b>	25.1 °C
<b>Test Orientation</b>	As intended	<b>Stabilization Time (min)</b>	90
<b>Model Number</b>	WFD34-6	2700K	

**Electrical Measurement:**

Sample No.	Voltage (Vac)	Frequency (Hz )	Current (A)	Power (W)	Power Factor
202504270117	120.0	60	0.086	9.45	0.916


**Chromaticity Measurement - Sphere-Spectroradiometer Method:**







Parameter	Result	Special Color Rendering Indices			
Test Voltage (V)	120	R1	98	R9	64
Frequency (Hz)	60	R2	99	R10	95
CCT (K)	2742	R3	98	R11	98
Duv	-0.0013	R4	97	R12	85
Chromaticity (x, y)	x=0.4542 y=0.4057	R5	97	R13	98
Chromaticity (u', v')	u'=0.2611 v'=0.5246	R6	95	R14	97
Color Rendering Index (CRI)	94.9	R7	91	R15	92
R9	64	R8	84	--	--
Rg	100				
Rf	91				
Rcs,h1%	-6				

**Photometric Measurement – Goniophotometer Method:**

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Total Luminous (lm)	821.8
Luminous Efficacy (lm/W)	86.96
Beam Angle (°)	96.7
Center Beam Candle Power (cd)	373.9

# Spectral Power Distribution & Chromaticity Diagram

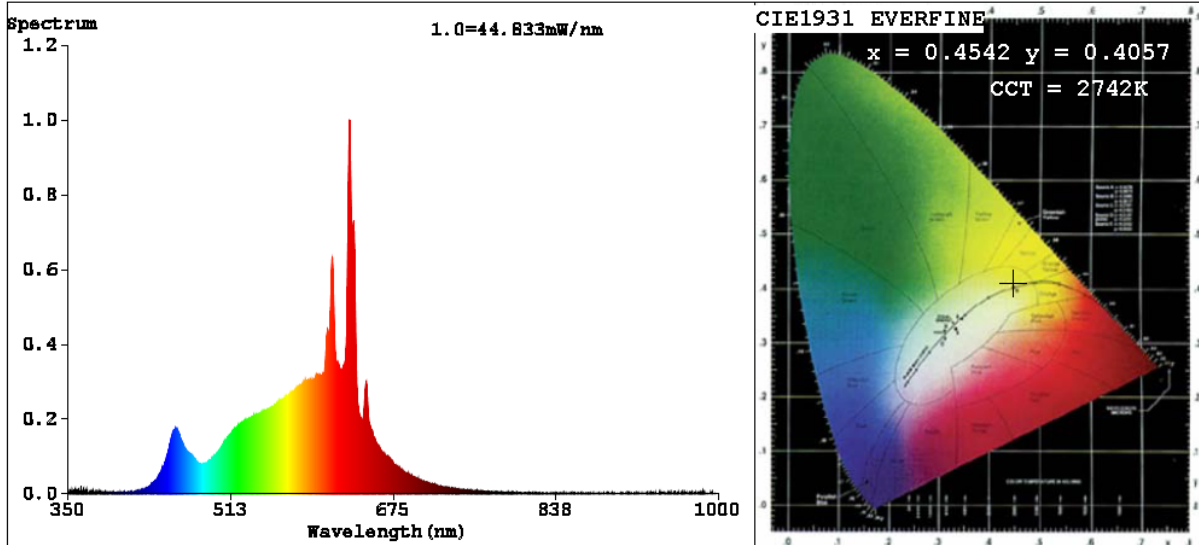

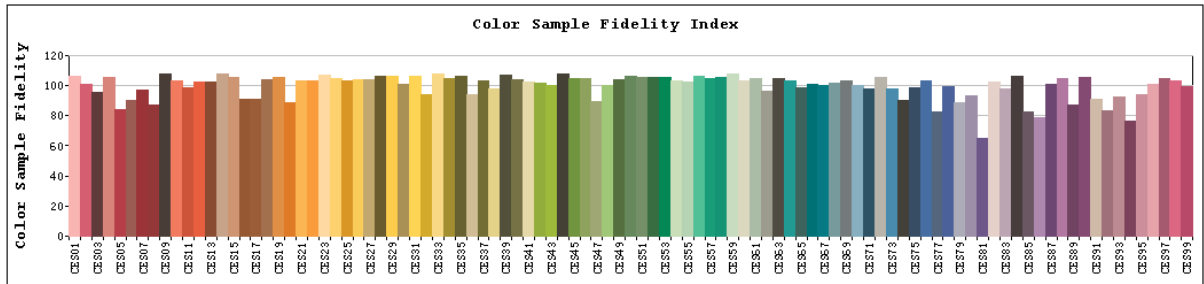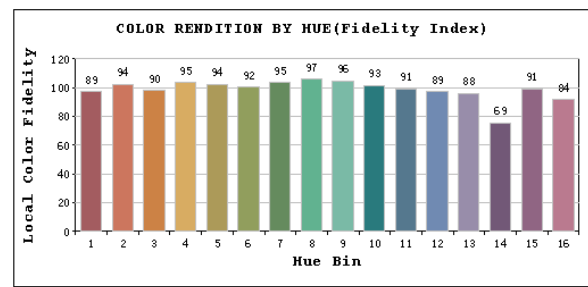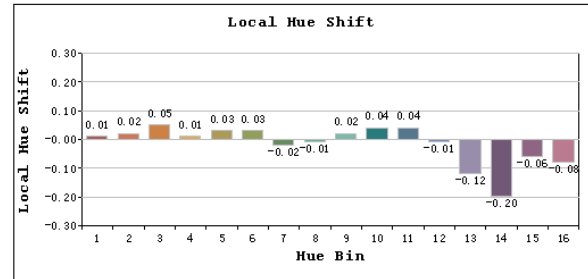
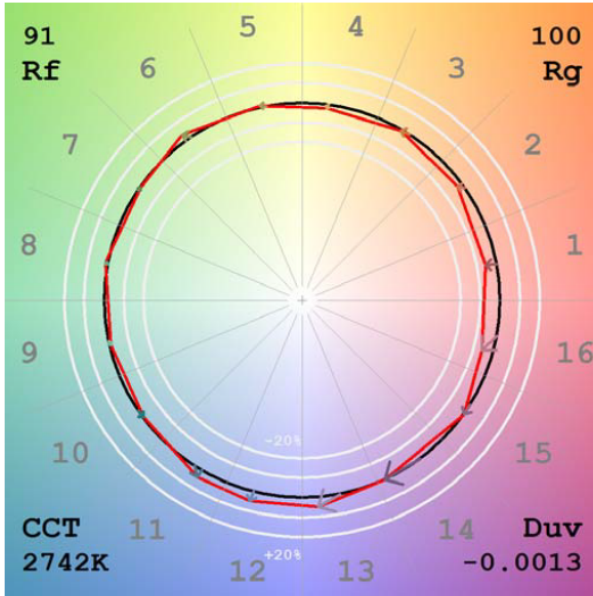
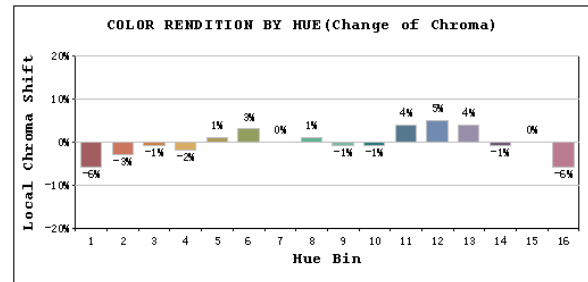
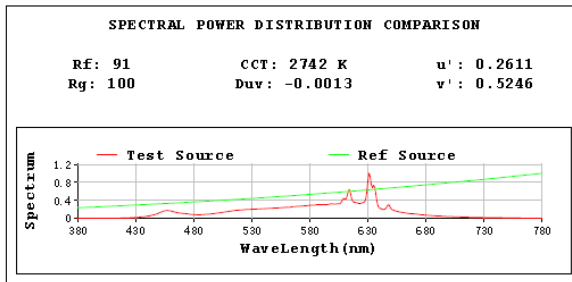


# Zonal Lumen Tabulation

Zonal Lumen Summary		
Zone	Lumens	% Luminaire
0-30	280.2	34.1%
0-40	448.3	54.6%
0-60	734.0	89.3%
60-90	87.7	10.7%
70-100	20.7	2.5%
90-120	0.0	0.0%
0-90	821.8	100.0%
90-180	0.0	0.0%
0-180	821.8	100.0%

Lumens Per Zone					
Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	35.2	4.3%	90-100	0.0	0.0%
10-20	98.9	12.0%	100-110	0.0	0.0%
20-30	146.1	17.8%	110-120	0.0	0.0%
30-40	168.1	20.5%	120-130	0.0	0.0%
40-50	161.5	19.7%	130-140	0.0	0.0%
50-60	124.2	15.1%	140-150	0.0	0.0%
60-70	67.0	8.2%	150-160	0.0	0.0%
70-80	17.7	2.2%	160-170	0.0	0.0%
80-90	3.0	0.4%	170-180	0.0	0.0%

## Photometric Data

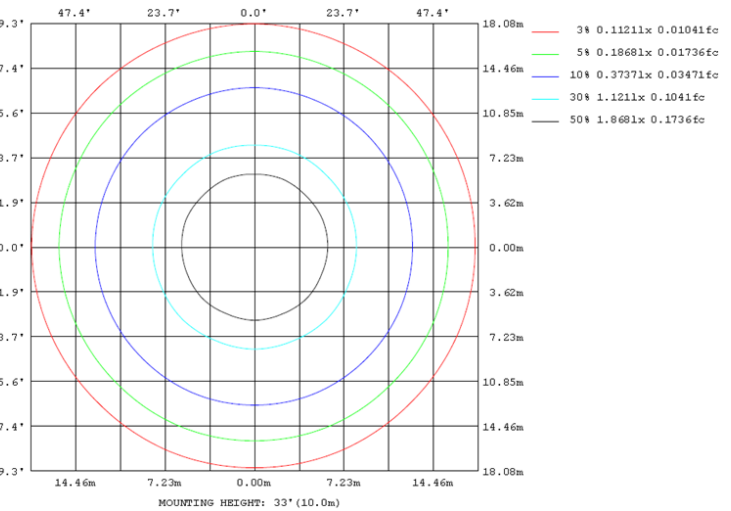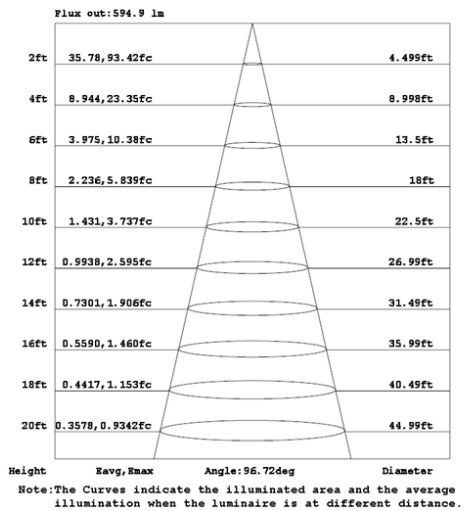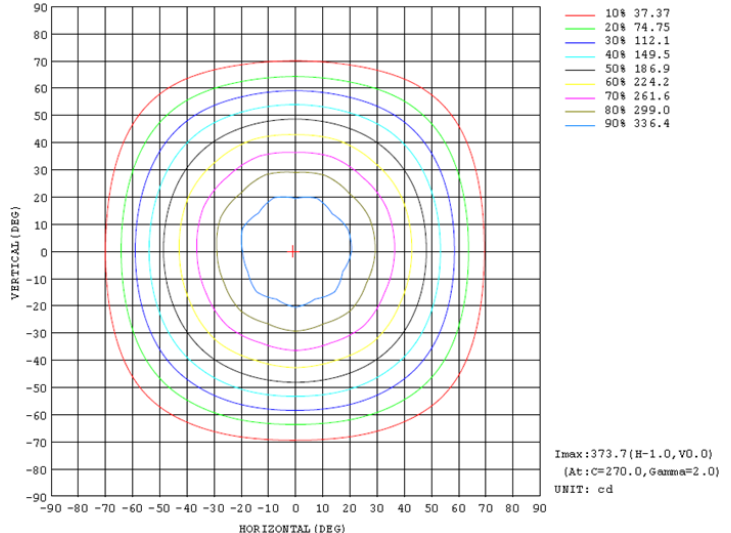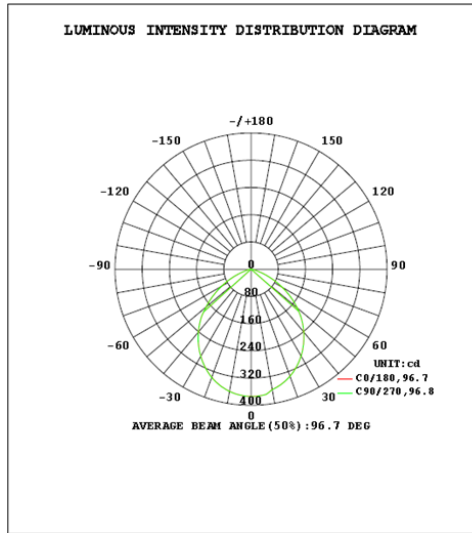



## 2.1.2 Electrical, Photometric and Chromaticity Measurements

Test date	2025-05-07	Test Ambient:	25.1 °C
Test Orientation	As intended	Stabilization Time (min)	90
Model Number	WFD34-6	3000K	

### Electrical Measurement:

Sample No.	Voltage (Vac)	Frequency (Hz )	Current (A)	Power (W)	Power Factor
202504270117	120.0	60	0.084	9.35	0.920


### Chromaticity Measurement - Sphere-Spectroradiometer Method:

Parameter	Result	Special Color Rendering Indices			
Test Voltage (V)	120	R1	99	R9	73
Frequency (Hz)	60	R2	99	R10	98
CCT (K)	2956	R3	99	R11	98
Duv	-0.0030	R4	98	R12	83
Chromaticity (x, y)	x=0.4357 y=0.3962	R5	98	R13	99
Chromaticity (u', v')	u'=0.2532 v'=0.5180	R6	94	R14	98
Color Rendering Index (CRI)	95.7	R7	92	R15	96
R9	73	R8	88	--	--
Rg	101				
Rf	92				
Rcs,h1%	-4				







### Photometric Measurement – Goniophotometer Method:

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Total Luminous (lm)	858.9
Luminous Efficacy (lm/W)	91.86

# Spectral Power Distribution & Chromaticity Diagram

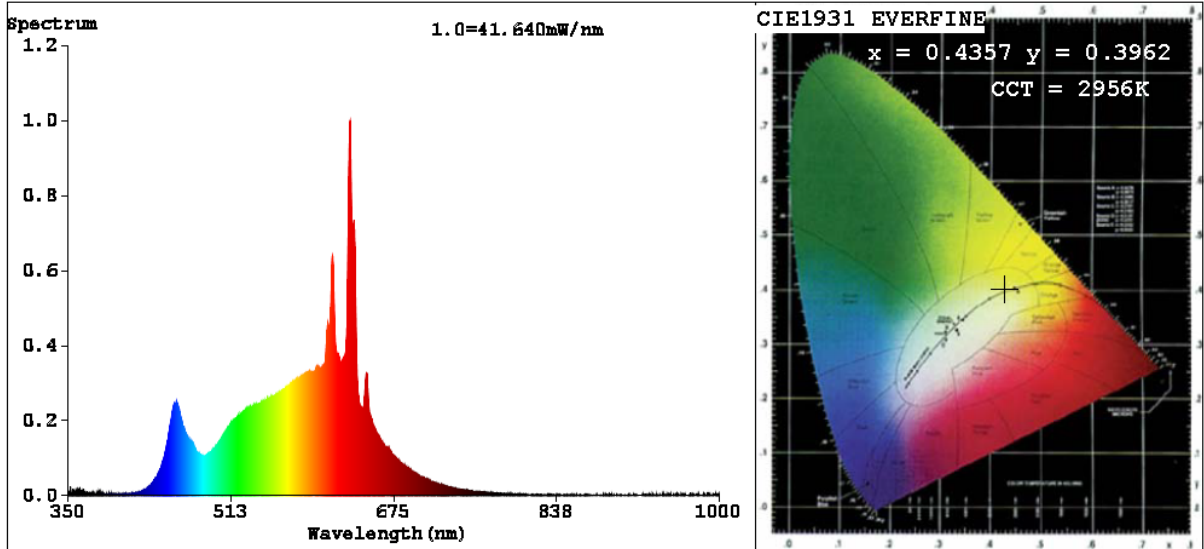

# TM30

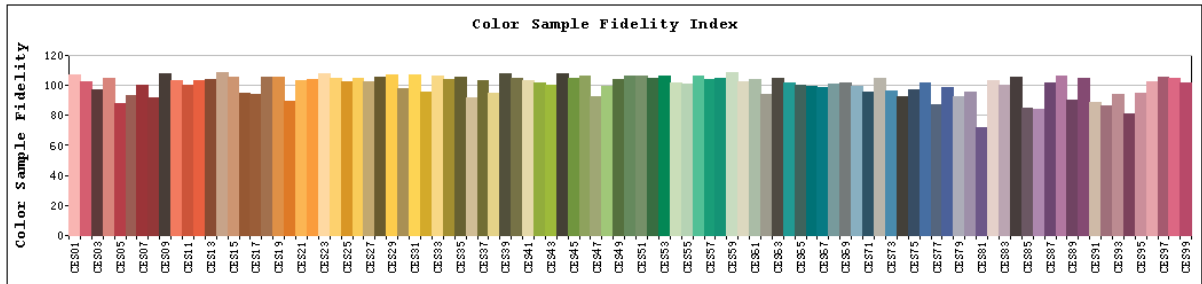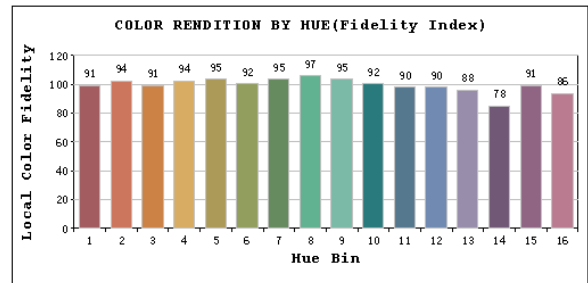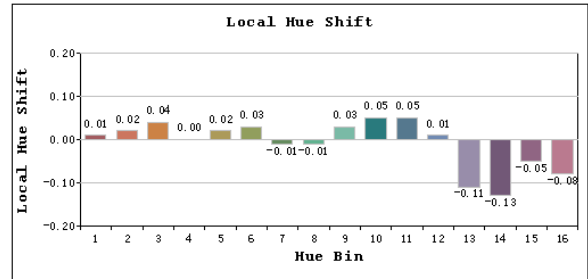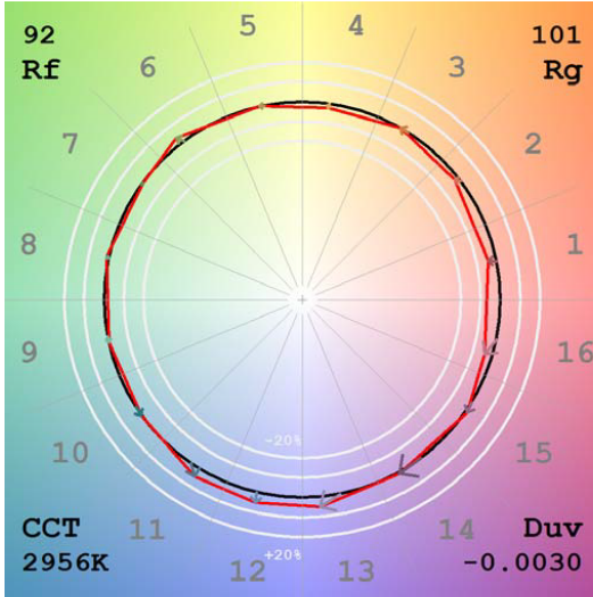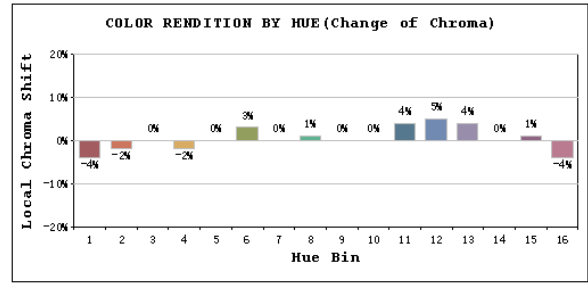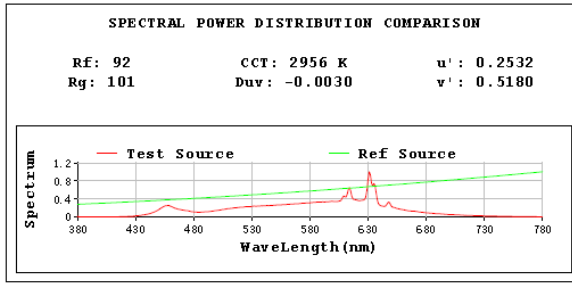

**2.1.3 Electrical, Photometric and Chromaticity Measurements**

<b>Test date</b>	2025-05-07	<b>Test Ambient:</b>	25.1 °C
<b>Test Orientation</b>	As intended	<b>Stabilization Time (min)</b>	90
<b>Model Number</b>	WFD34-6	3500K	

**Electrical Measurement:**

Sample No.	Voltage (Vac)	Frequency (Hz )	Current (A)	Power (W)	Power Factor
202504270117	120.0	60	0.084	9.28	0.926


**Chromaticity Measurement - Sphere-Spectroradiometer Method:**

Parameter	Result	Special Color Rendering Indices			
Test Voltage (V)	120	R1	98	R9	85
Frequency (Hz)	60	R2	98	R10	98
CCT (K)	3374	R3	98	R11	98
Duv	-0.0044	R4	98	R12	80
Chromaticity (x, y)	x=0.4077 y=0.3820	R5	97	R13	98
Chromaticity (u', v')	u'=0.2409 v'=0.5080	R6	94	R14	98
Color Rendering Index (CRI)	96.2	R7	94	R15	98
R9	85	R8	92	--	--
Rg	101				
Rf	92				
Rcs,h1%	-3				







**Photometric Measurement – Goniophotometer Method:**

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Total Luminous (lm)	897.8
Luminous Efficacy (lm/W)	96.75

# Spectral Power Distribution & Chromaticity Diagram

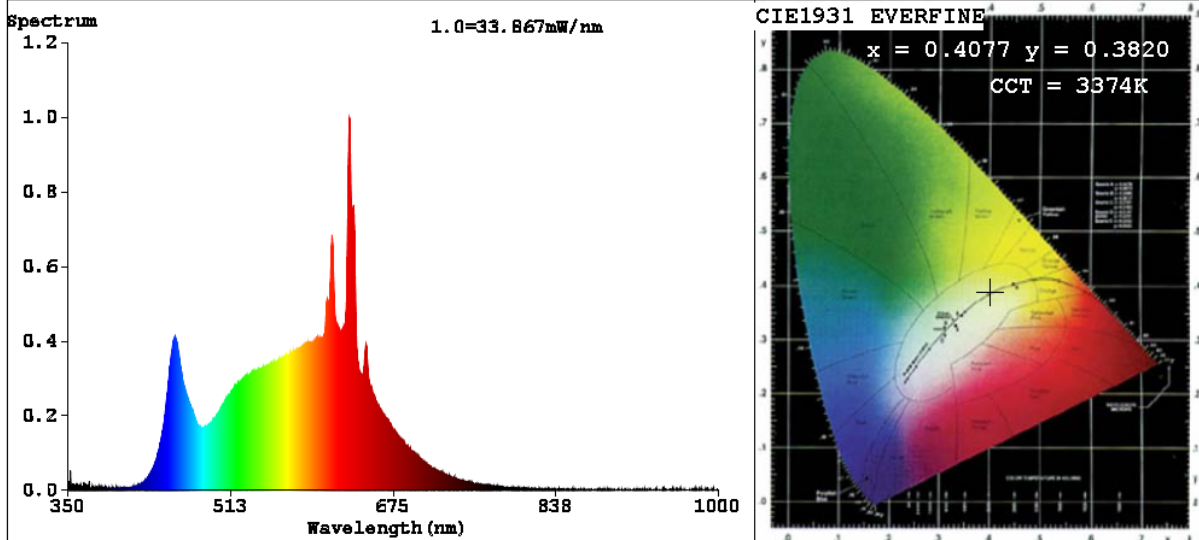

# TM30

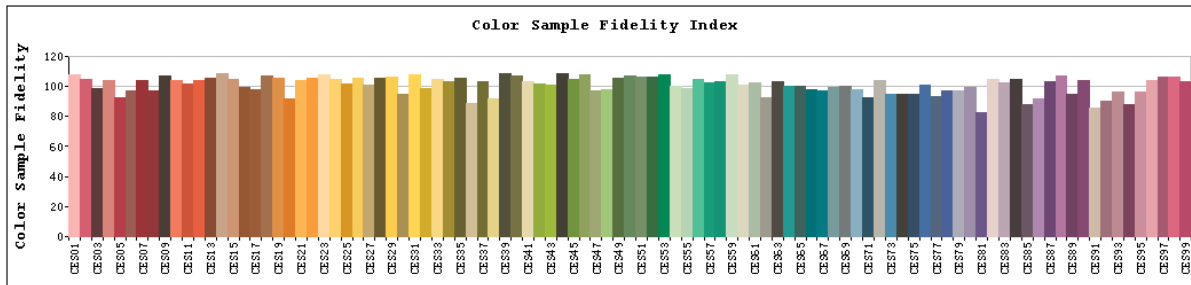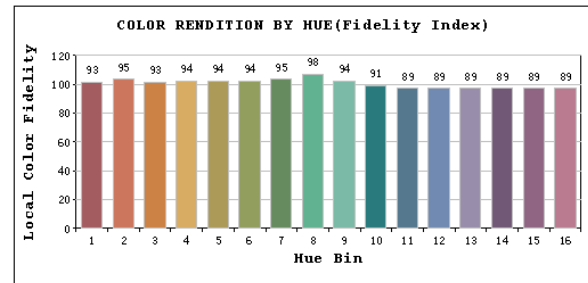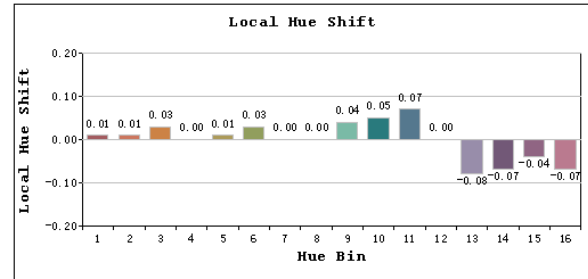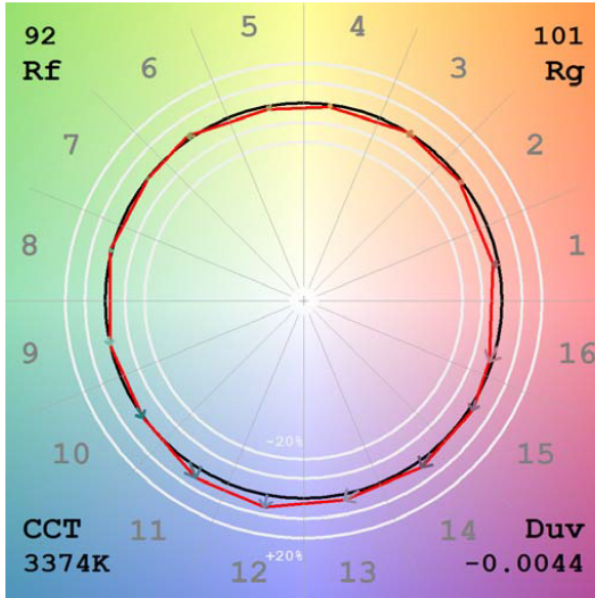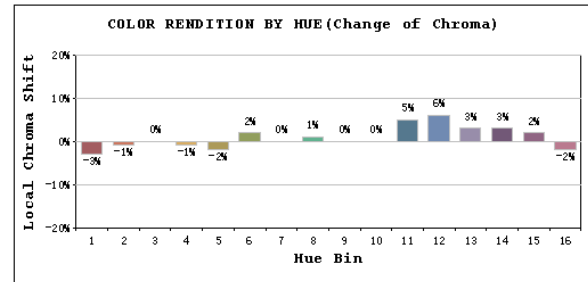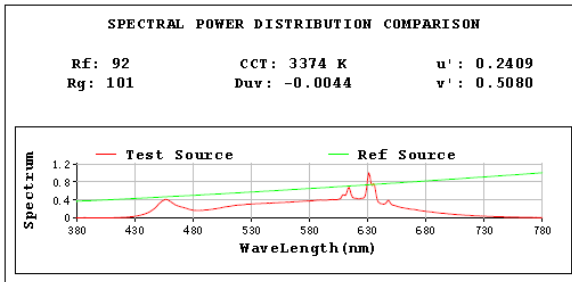

**2.1.4 Electrical, Photometric and Chromaticity Measurements**

<b>Test date</b>	2025-05-07	<b>Test Ambient:</b>	25.1 °C
<b>Test Orientation</b>	As intended	<b>Stabilization Time (min)</b>	90
<b>Model Number</b>	WFD34-6	4000K	

**Electrical Measurement:**

Sample No.	Voltage (Vac)	Frequency (Hz )	Current (A)	Power (W)	Power Factor
202504270117	120.0	60	0.084	9.32	0.922


**Chromaticity Measurement - Sphere-Spectroradiometer Method:**







Parameter	Result	Special Color Rendering Indices			
Test Voltage (V)	120	R1	97	R9	91
Frequency (Hz)	60	R2	98	R10	99
CCT (K)	3771	R3	98	R11	98
Duv	-0.0042	R4	98	R12	77
Chromaticity (x, y)	x=0.3877 y=0.3722	R5	97	R13	98
Chromaticity (u', v')	u'=0.2317 v'=0.5006	R6	94	R14	98
Color Rendering Index (CRI)	96.6	R7	95	R15	97
R9	91	R8	95	--	--
Rg	101				
Rf	93				
Rcs,h1%	-2				

**Photometric Measurement – Goniophotometer Method:**

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Total Luminous (lm)	896.3
Luminous Efficacy (lm/W)	96.17

# Spectral Power Distribution & Chromaticity Diagram

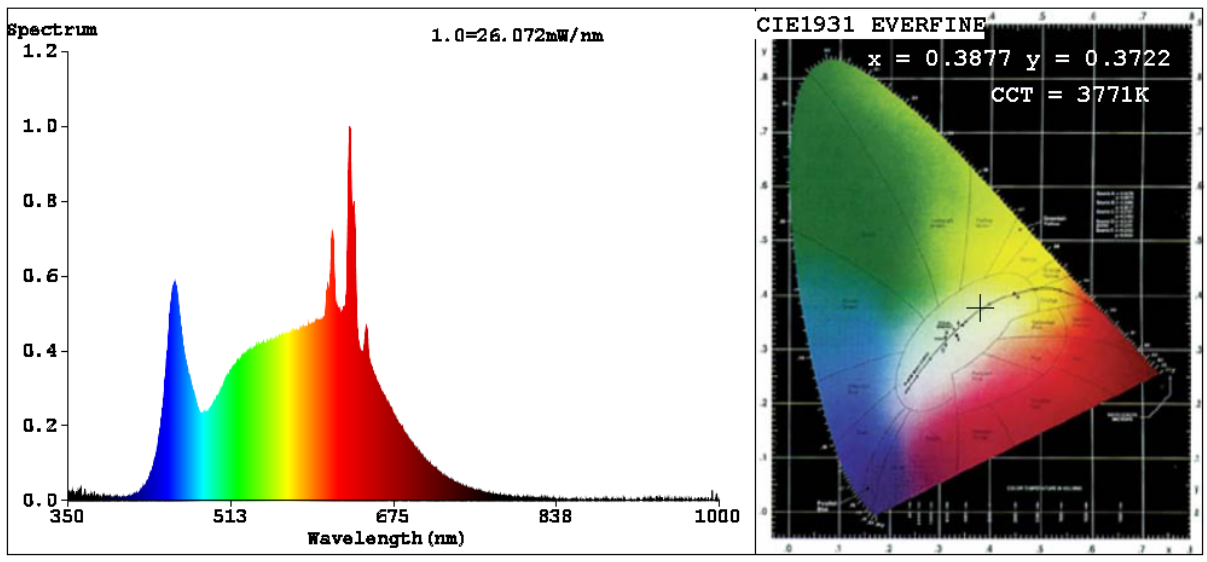

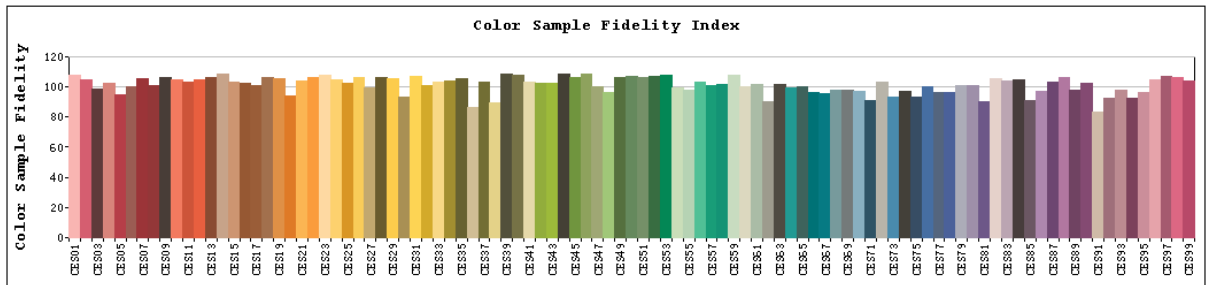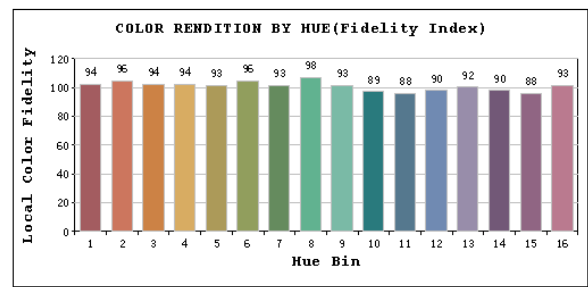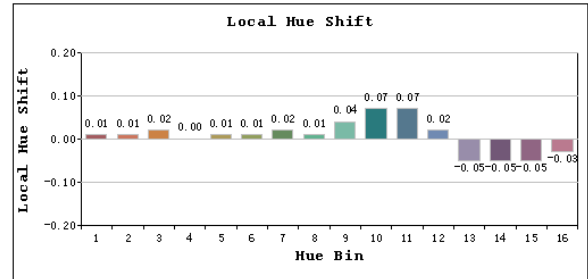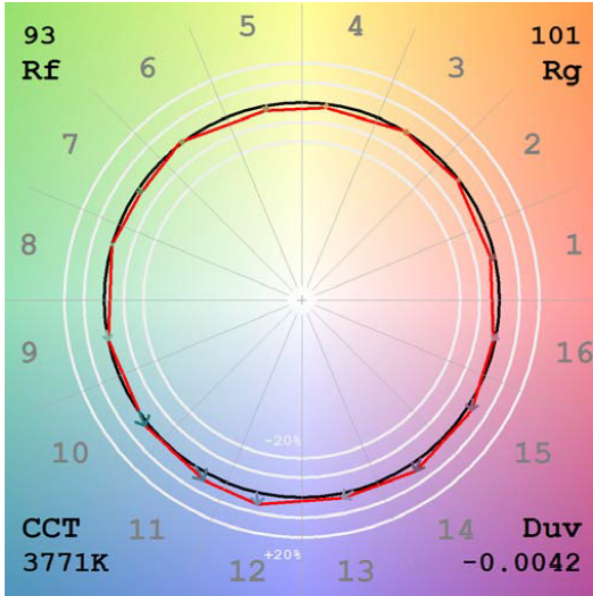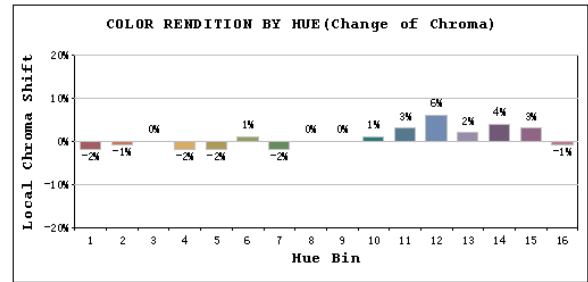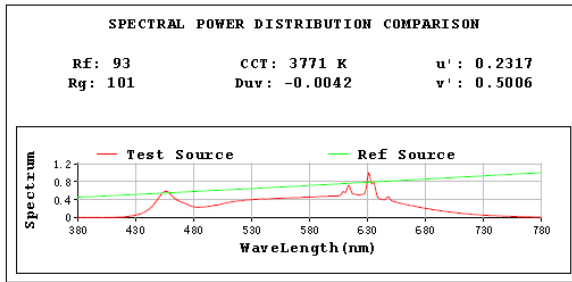

**2.1.5 Electrical, Photometric and Chromaticity Measurements**

<b>Test date</b>	2025-05-07	<b>Test Ambient:</b>	25.1 °C
<b>Test Orientation</b>	As intended	<b>Stabilization Time (min)</b>	90
<b>Model Number</b>	WFD34-6	5000K	

**Electrical Measurement:**

Sample No.	Voltage (Vac)	Frequency (Hz )	Current (A)	Power (W)	Power Factor
202504270117	120.0	60	0.085	9.39	0.916


**Chromaticity Measurement - Sphere-Spectroradiometer Method:**

Parameter	Result	Special Color Rendering Indices			
Test Voltage (V)	120	R1	97	R9	90
Frequency (Hz)	60	R2	99	R10	94
CCT (K)	4905	R3	97	R11	94
Duv	0.0001	R4	94	R12	68
Chromaticity (x, y)	x=0.3478 y=0.3539	R5	94	R13	98
Chromaticity (u', v')	u'=0.2124 v'=0.4862	R6	94	R14	98
Color Rendering Index (CRI)	95.6	R7	96	R15	95
R9	90	R8	95	--	--
Rg	100				
Rf	93				
Rcs,h1%	-2				







**Photometric Measurement – Goniophotometer Method:**

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Total Luminous (lm)	819.4
Luminous Efficacy (lm/W)	87.26

# Spectral Power Distribution & Chromaticity Diagram


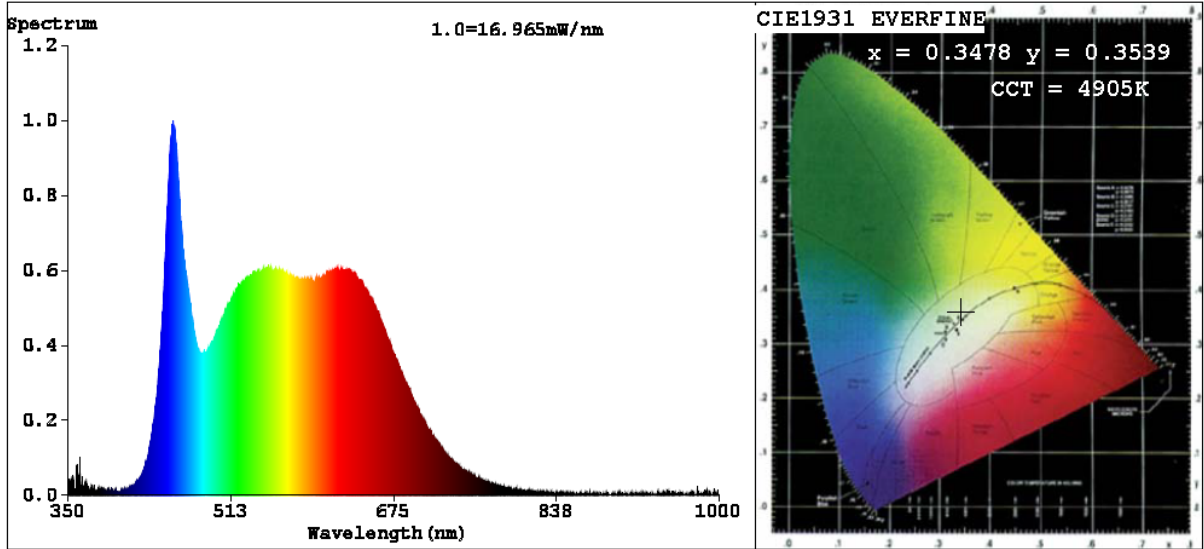


# TM30

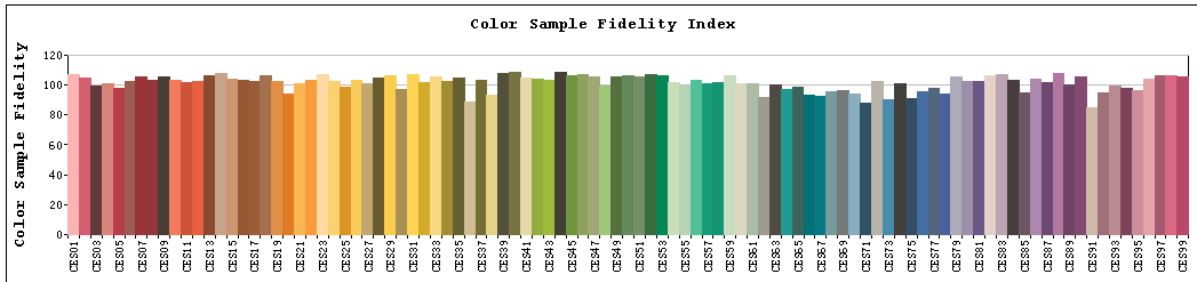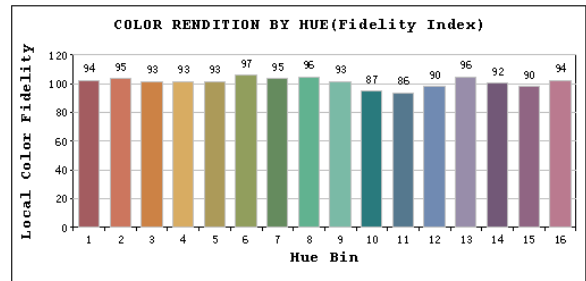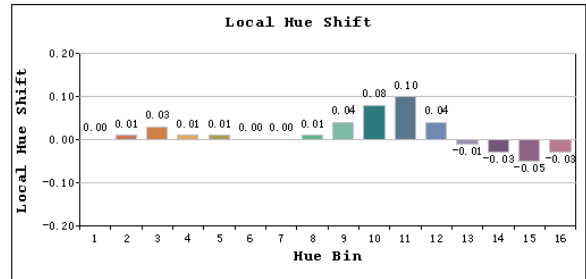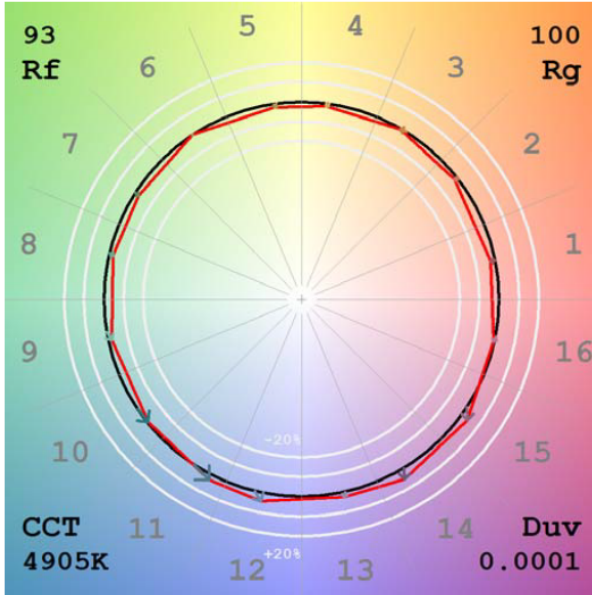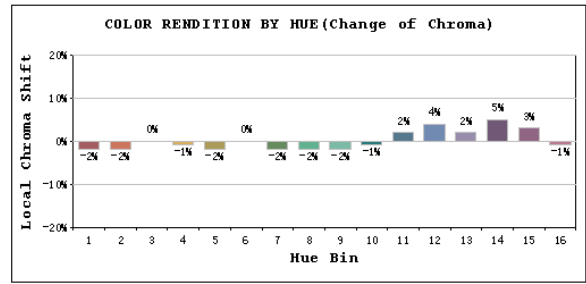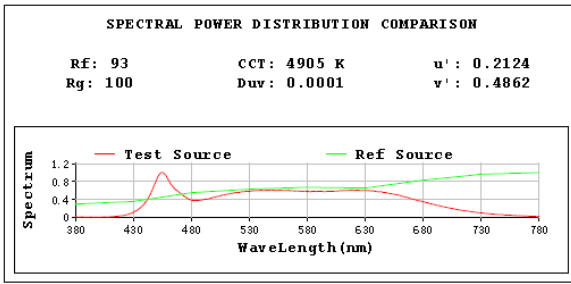

Sample No.	Wattage and CCT setting	Test Voltage(V)	Flux(lm)	P(W)	Luminous Efficacy lm/W
WFD34-6	2700K setting	120	821.8	9.45	86.96
	3000K setting	120	858.9	9.35	91.86
	3500K setting	120	897.8	9.28	96.75
	4000K setting	120	896.3	9.32	96.17
	5000K setting	120	819.4	9.39	87.26

**3. Product Photo**

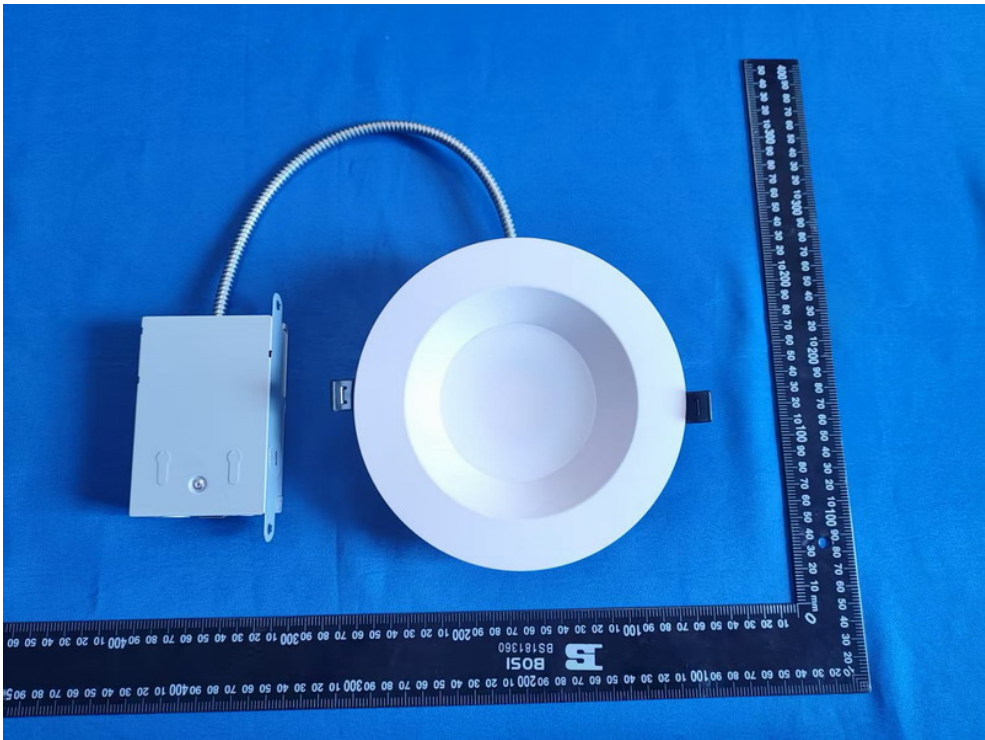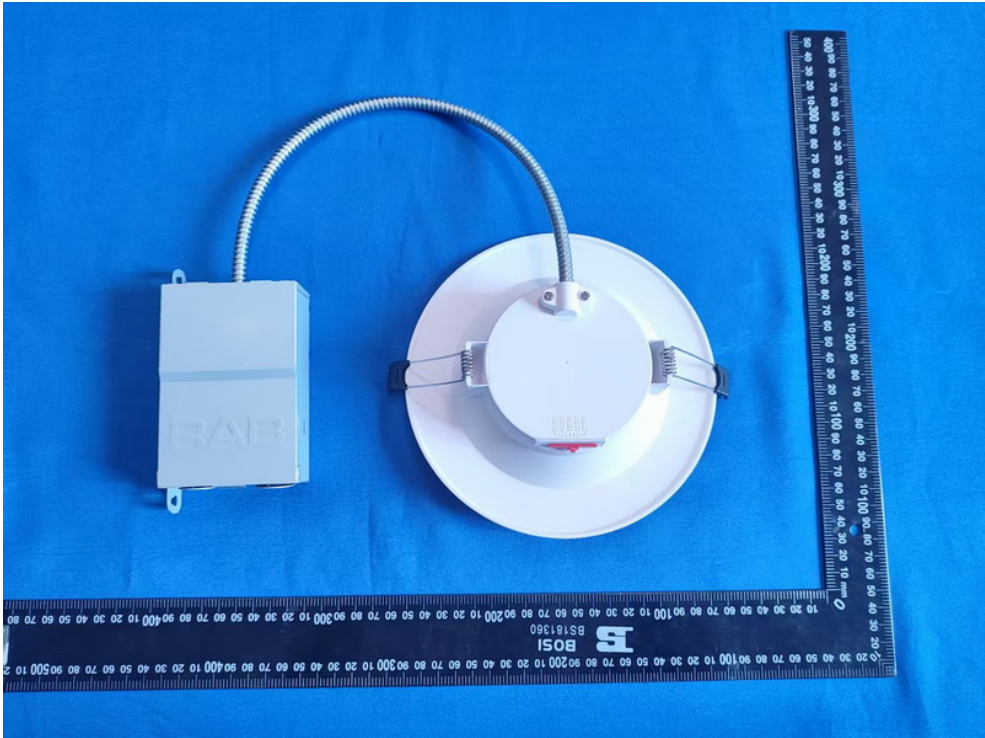

**\*\*\*\*\* END OF REPORT \*\*\*\*\***