

**LM-79-08 Test Report**  
For  
**RAB LIGHTING INC**

**(Brand Name: N/A)**

408 W 14th St, New York, NY 10014, USA

**Model name(s):**  
**WFRX-6RB/NL**

**Report Type:** Testing and Report According to IES LM-79-2008

**Type of  
Luminaire:** Downlights

**Report Date:** 2025-11-21


**Prepared By:**

Test & Report By:



Engineer: Sun Fangfang

Review By:



Manager: Huang Qichong

<b>1.1 Rated Values:</b>	
Rated Voltage / Frequency	120Vac, 60 Hz
Nominal Power	9.0W/11.0W/13.0W
Rated Initial Lamp Lumen	850lm/1000lm/1200lm (mode5000K)
Declared CCT	2700K/3000K/3500K/4000K/5000K

### 1.2 Test Specifications:

Test item	<ol style="list-style-type: none"> <li>1. Total Luminous Flux</li> <li>2. Luminous Distribution Intensity</li> <li>3. Luminous Efficacy</li> <li>4. Correlated Color Temperature</li> <li>5. Color Rendering Index</li> <li>6. Chromaticity Coordinate</li> <li>7. Electrical Parameters</li> </ol>
Reference Standard	<ol style="list-style-type: none"> <li>1. IES LM-79-2008 Electrical and Photometric Measurements of Solid-State Lighting Products</li> <li>2. ANSI C78.377-2015 Specifications for the Chromaticity of Solid State Lighting Products</li> <li>3. CIE 13.3-1995 Method of Measuring and Specifying Colour Rendering Properties of Light Sources</li> <li>4. CIE 15-2004 Technical Report Colorimetry</li> <li>5. IESNA LM-16-93 Practical Guide to Colorimetry of Light Source</li> <li>6. IESNA TM-16-05 Technical Memorandum on Light Emitting Diode (LED) Sources and Systems</li> </ol>
Reference Work Instruction	QD25

### 1.3 Test Methods

<p><b>1) Photometric and Light Distribution Measurement – Goniophotometer Method:</b> Photometric parameters were measured using the goniophotometer and software. The ambient temperature shall be maintained at 25°C ±1°C, measured at a point not more than 1 m from the sample and at the same height as the sample. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 1°vertical intervals and 22.5°horizontal intervals.</p>
<p><b>2) Chromaticity Measurement – Sphere-Spectroradiometer Method:</b> Chromaticity parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at 25°C ±1°C. The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral power distribution taken at 5 nm intervals over the range of 380 to 780 nm</p>
<p><b>3) Electrical Measurements:</b> Electrical parameters were measured using power meters incorporated in goniophotometer or sphere-spectroradiometer system. The ambient temperature surrounding the sample was maintained at 25°C ±1°C. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Voltage, frequency, current, power, power factor and total harmonic distortion were measured by and read from the power meter.</p>

**2.1.1 Electrical, Photometric and Chromaticity Measurements**

<b>Test date</b>	2025-11-19	<b>Test Ambient:</b>	25.1 °C
<b>Test Orientation</b>	As intended	<b>Stabilization Time (min)</b>	90
<b>Model Number</b>	WFRX-6RB/NL	5000K	

**Electrical Measurement:**

Sample No.	Voltage (Vac)	Frequency (Hz )	Current (A)	Power (W)	Power Factor
202510160006	120.0	60	0.103	12.10	0.980


**Chromaticity Measurement - Sphere-Spectroradiometer Method:**

Parameter	Result	Special Color Rendering Indices			
Test Voltage (V)	120	R1	98	R9	84
Frequency (Hz)	60	R2	97	R10	91
CCT (K)	4952	R3	94	R11	95
Duv	0.0022	R4	98	R12	70
Chromaticity (x, y)	x=0.3469 y=0.3574	R5	96	R13	98
Chromaticity (u', v')	u'=0.2104 v'=0.4878	R6	94	R14	96
Color Rendering Index (CRI)	96.4	R7	98	R15	96
R9	84	R8	95	--	--
Rg	102				
Rf	94				
Rcs,h1%	-3				







**Photometric Measurement – Goniophotometer Method:**

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Total Luminous (lm)	1230.4
Luminous Efficacy (lm/W)	101.69
Beam Angle (°)	106.9
Center Beam Candle Power (cd)	466.5

# Spectral Power Distribution & Chromaticity Diagram

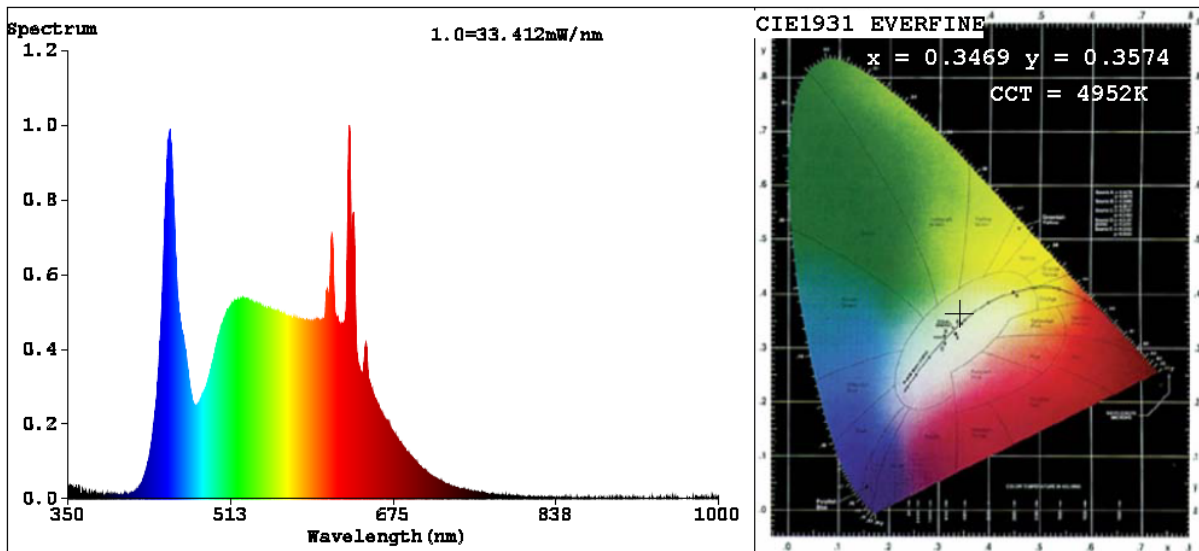

# TM30

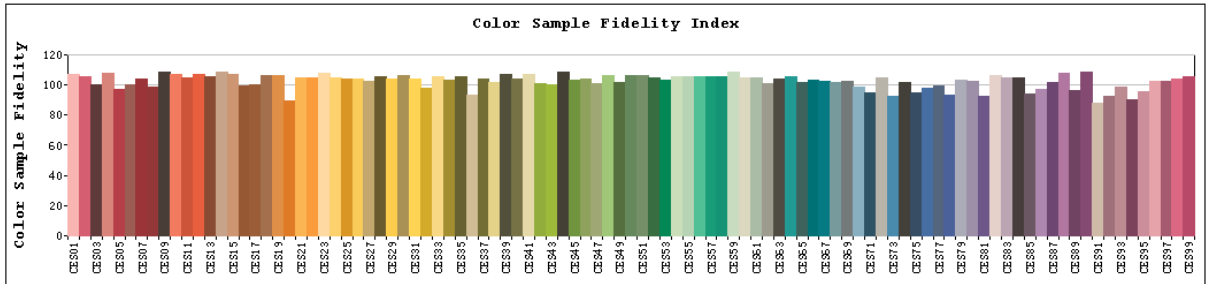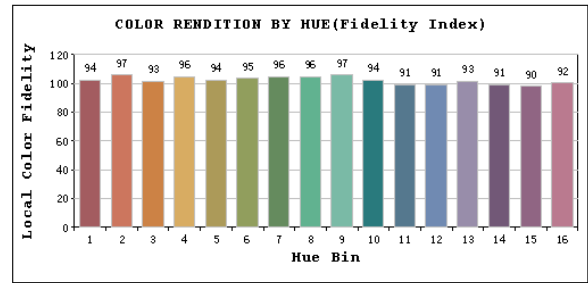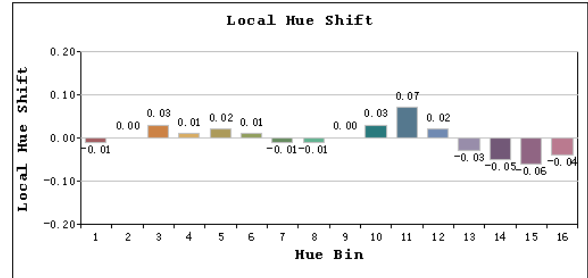
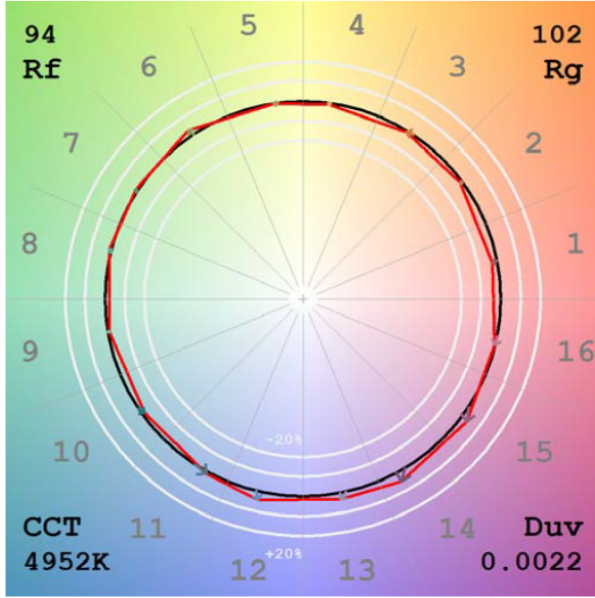
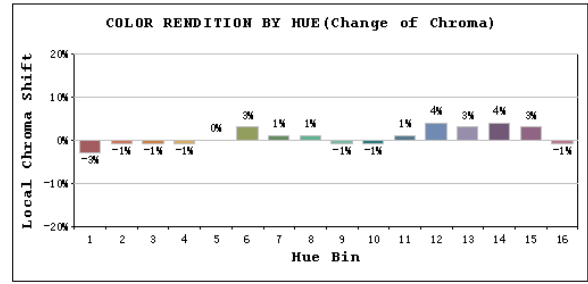
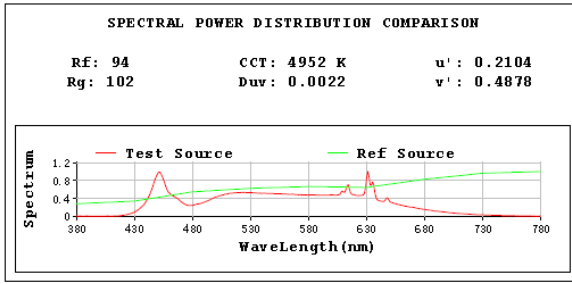


# Zonal Lumen Tabulation

Zonal Lumen Summary		
Zone	Lumens	% Luminaire
0-30	356.2	28.9%
0-40	576.3	46.8%
0-60	998.2	81.1%
60-90	232.2	18.9%
70-100	88.8	7.2%
90-120	0.0	0.0%
0-90	1230.4	100.0%
90-180	0.0	0.0%
0-180	1230.4	100.0%

Lumens Per Zone					
Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	44.0	3.6%	90-100	0.0	0.0%
10-20	125.0	10.2%	100-110	0.0	0.0%
20-30	187.2	15.2%	110-120	0.0	0.0%
30-40	220.1	17.9%	120-130	0.0	0.0%
40-50	224.2	18.2%	130-140	0.0	0.0%
50-60	197.8	16.1%	140-150	0.0	0.0%
60-70	143.5	11.7%	150-160	0.0	0.0%
70-80	75.2	6.1%	160-170	0.0	0.0%
80-90	13.6	1.1%	170-180	0.0	0.0%

## Photometric Data

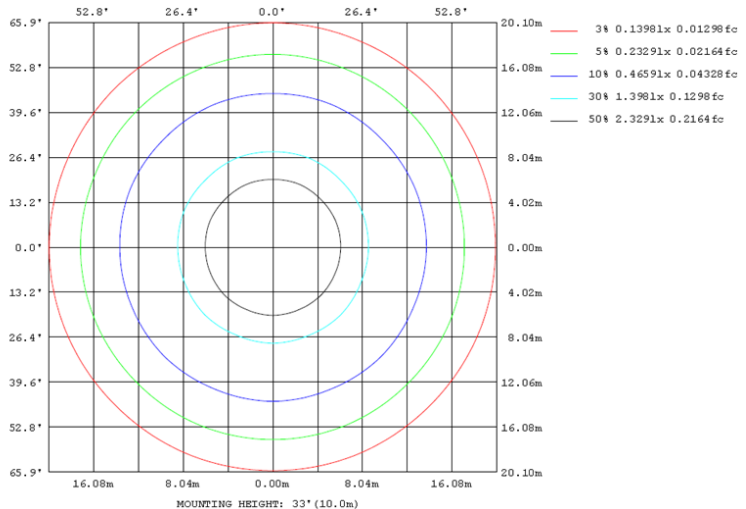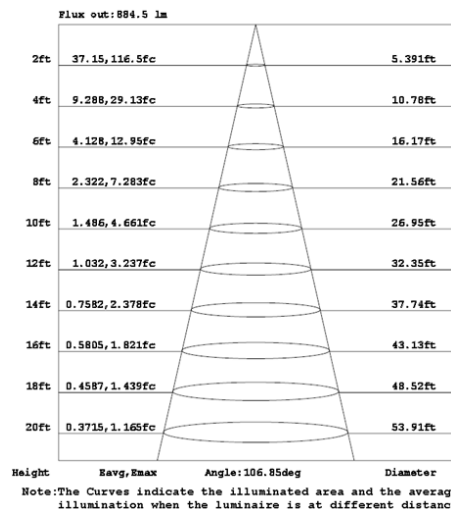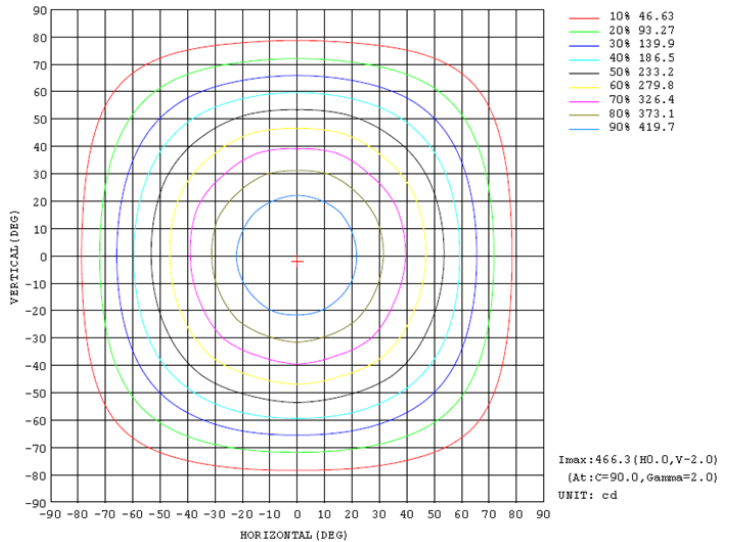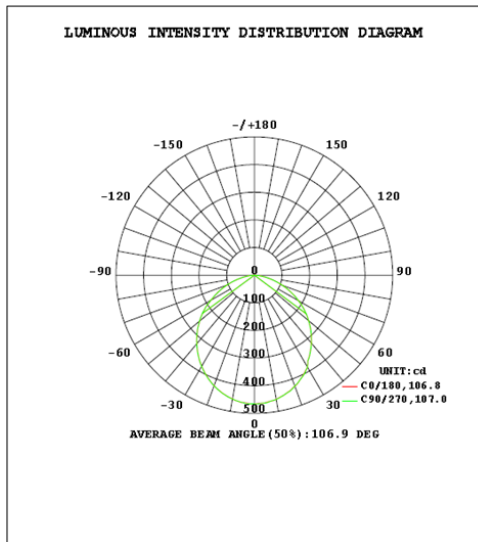



## 2.1.2 Electrical, Photometric and Chromaticity Measurements

Test date	2025-11-19	Test Ambient:	25.1 °C
Test Orientation	As intended	Stabilization Time (min)	90
Model Number	WFRX-6RB/NL	2700K	

### Electrical Measurement:

Sample No.	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
202510160006	120.0	60	0.102	12.10	0.980


### Chromaticity Measurement - Sphere-Spectroradiometer Method:

Parameter	Result	Special Color Rendering Indices			
Test Voltage (V)	120	R1	97	R9	62
Frequency (Hz)	60	R2	99	R10	97
CCT (K)	2740	R3	99	R11	98
Duv	-0.0015	R4	97	R12	88
Chromaticity (x, y)	x=0.4542 y=0.4053	R5	97	R13	98
Chromaticity (u', v')	u'=0.2612 v'=0.5245	R6	95	R14	99
Color Rendering Index (CRI)	94.6	R7	91	R15	91
R9	62	R8	82	--	--
Rg	100				
Rf	92				
Rcs,h1%	-6				







### Photometric Measurement – Goniophotometer Method:

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Total Luminous (lm)	1185.5
Luminous Efficacy (lm/W)	97.98

# Spectral Power Distribution & Chromaticity Diagram

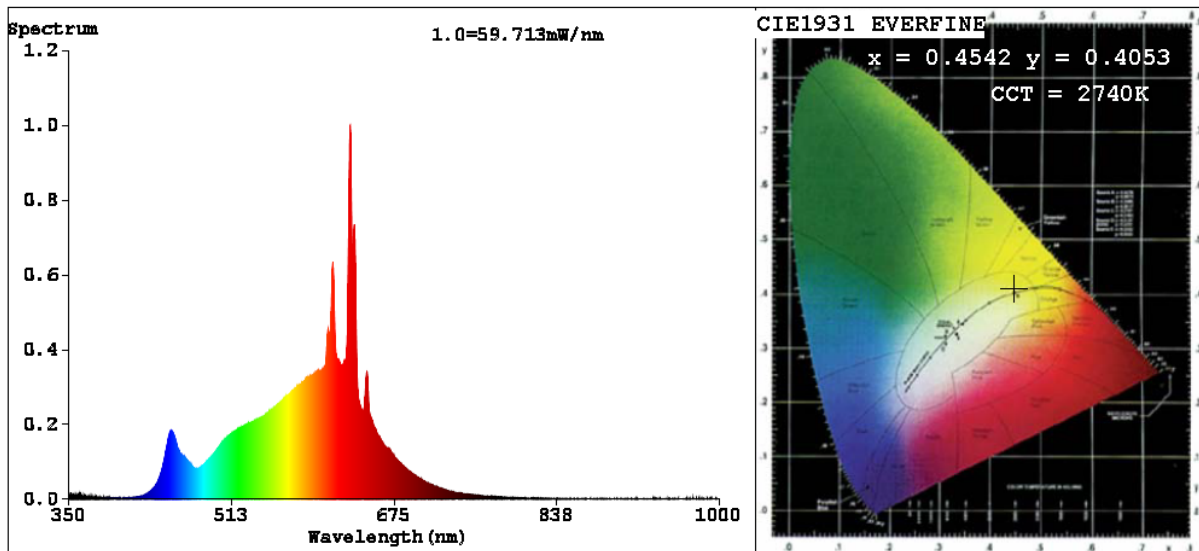

# TM30

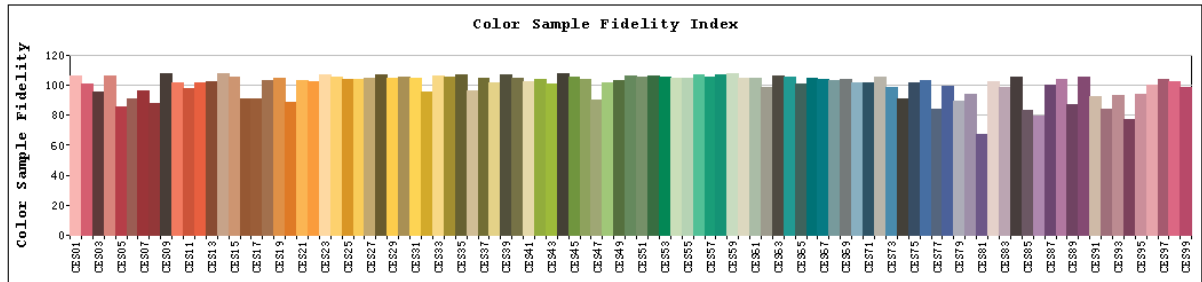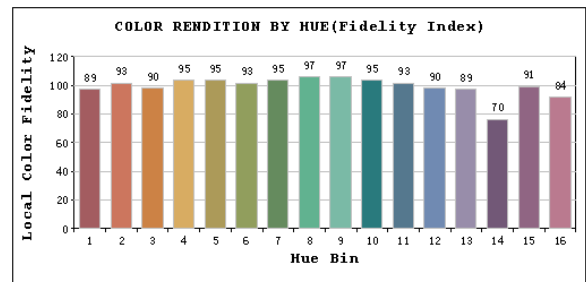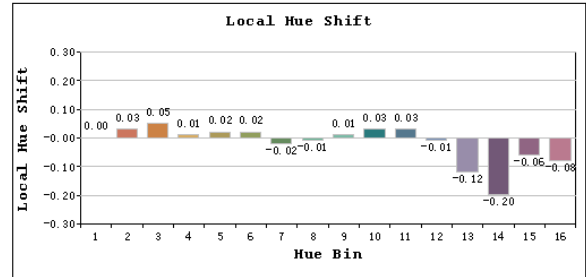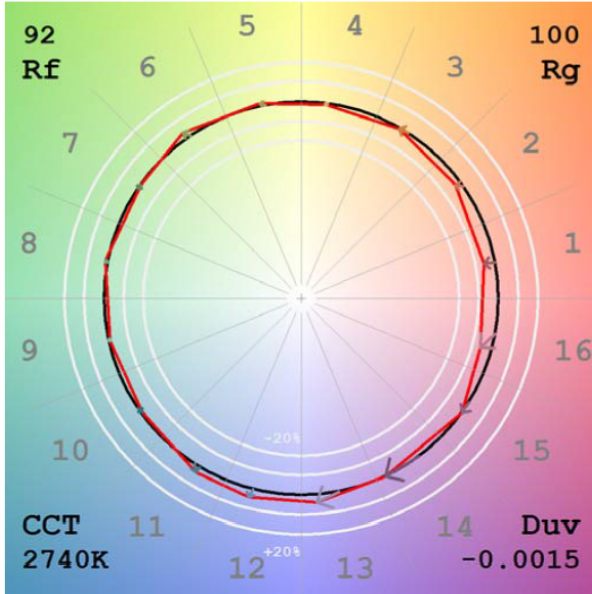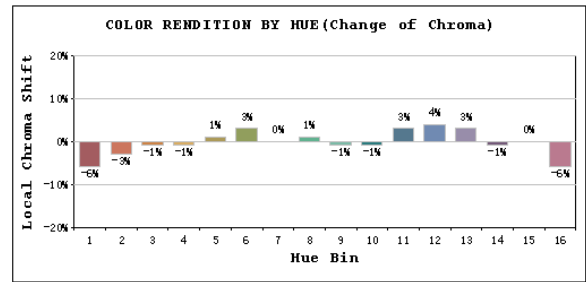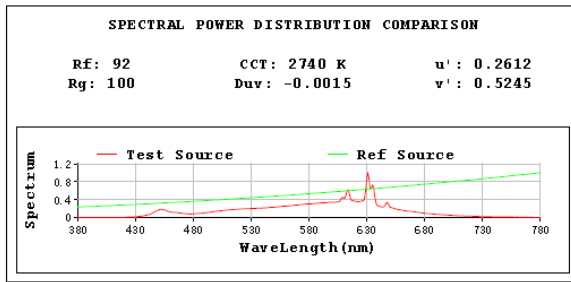

### 2.1.3 Electrical, Photometric and Chromaticity Measurements

Test date	2025-11-19	Test Ambient:	25.1 °C
Test Orientation	As intended	Stabilization Time (min)	90
Model Number	WFRX-6RB/NL	3000K	

#### Electrical Measurement:

Sample No.	Voltage (Vac)	Frequency (Hz )	Current (A)	Power (W)	Power Factor
202510160006	120.0	60	0.103	12.10	0.980


#### Chromaticity Measurement - Sphere-Spectroradiometer Method:







Parameter	Result	Special Color Rendering Indices			
Test Voltage (V)	120	R1	99	R9	73
Frequency (Hz)	60	R2	99	R10	98
CCT (K)	3060	R3	99	R11	96
Duv	-0.0028	R4	98	R12	86
Chromaticity (x, y)	x=0.4288 y=0.3944	R5	99	R13	99
Chromaticity (u', v')	u'=0.2495 v'=0.5163	R6	95	R14	98
Color Rendering Index (CRI)	96.1	R7	93	R15	95
R9	73	R8	88	--	--
Rg	102				
Rf	93				
Rcs,h1%	-4				

#### Photometric Measurement – Goniophotometer Method:

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Total Luminous (lm)	1198.6
Luminous Efficacy (lm/W)	99.06

# Spectral Power Distribution & Chromaticity Diagram

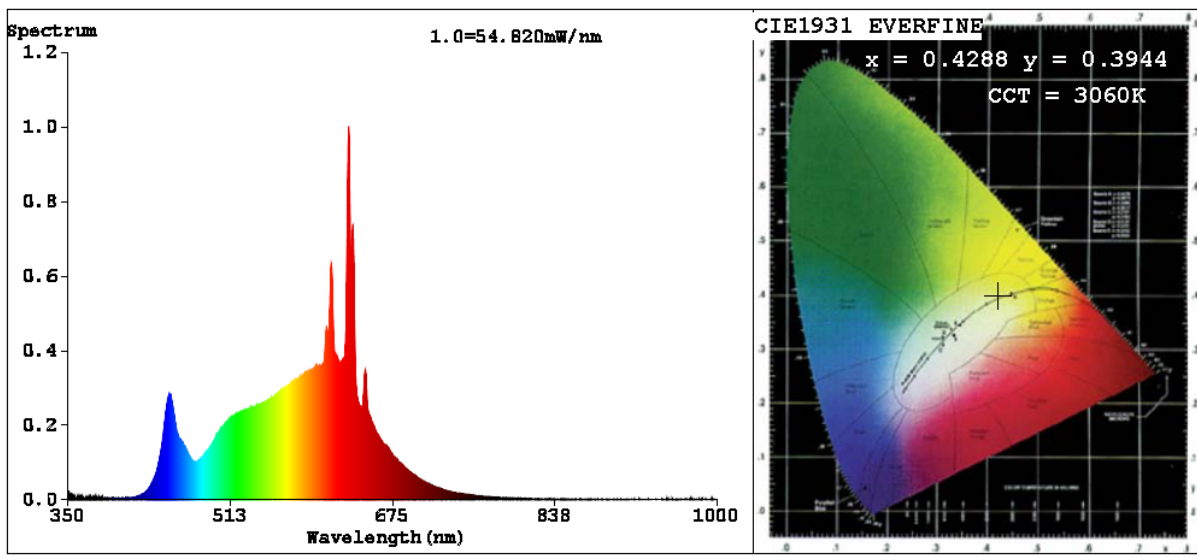

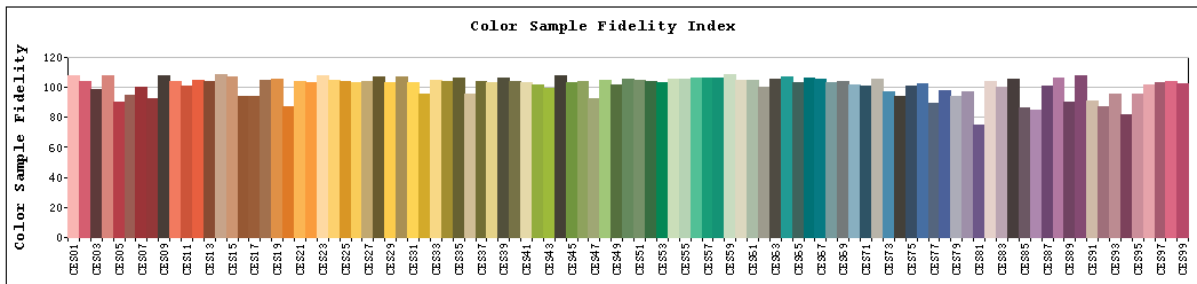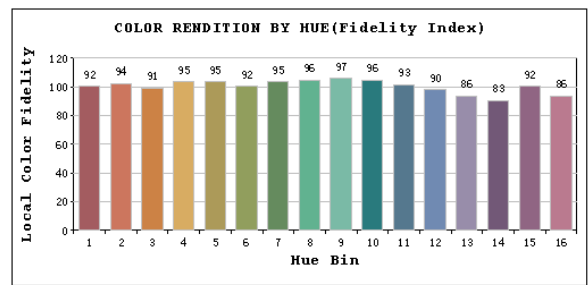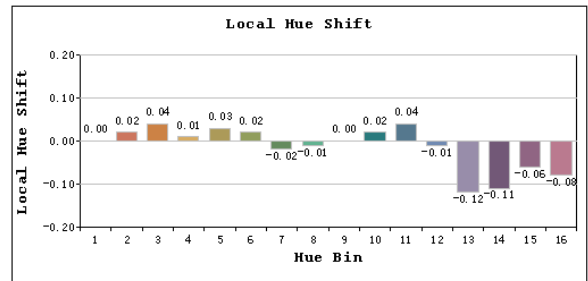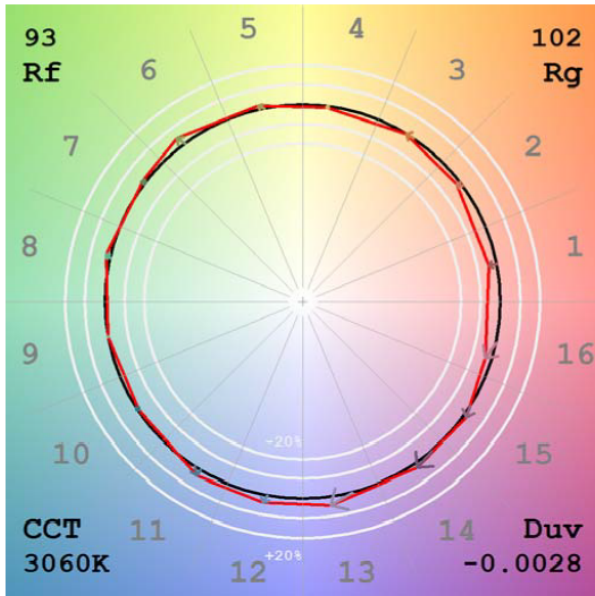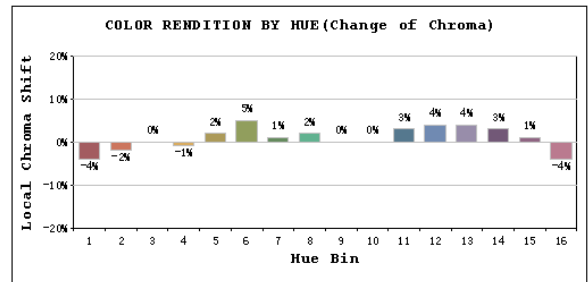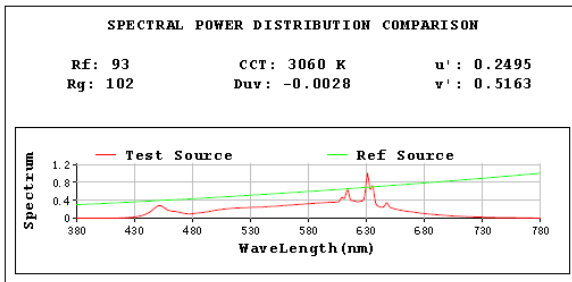

**2.1.4 Electrical, Photometric and Chromaticity Measurements**

<b>Test date</b>	2025-11-19	<b>Test Ambient:</b>	25.1 °C
<b>Test Orientation</b>	As intended	<b>Stabilization Time (min)</b>	90
<b>Model Number</b>	WFRX-6RB/NL	3500K	

**Electrical Measurement:**

Sample No.	Voltage (Vac)	Frequency (Hz )	Current (A)	Power (W)	Power Factor
202510160006	120.0	60	0.102	12.00	0.980


**Chromaticity Measurement - Sphere-Spectroradiometer Method:**







Parameter	Result	Special Color Rendering Indices			
Test Voltage (V)	120	R1	98	R9	83
Frequency (Hz)	60	R2	99	R10	98
CCT (K)	3522	R3	97	R11	94
Duv	-0.0031	R4	97	R12	83
Chromaticity (x, y)	x=0.4010 y=0.3817	R5	99	R13	99
Chromaticity (u', v')	u'=0.2366 v'=0.5068	R6	95	R14	97
Color Rendering Index (CRI)	96.8	R7	95	R15	98
R9	83	R8	93	--	--
Rg	102				
Rf	93				
Rcs,h1%	-3				

**Photometric Measurement – Goniophotometer Method:**

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Total Luminous (lm)	1215.7
Luminous Efficacy (lm/W)	101.31

# Spectral Power Distribution & Chromaticity Diagram

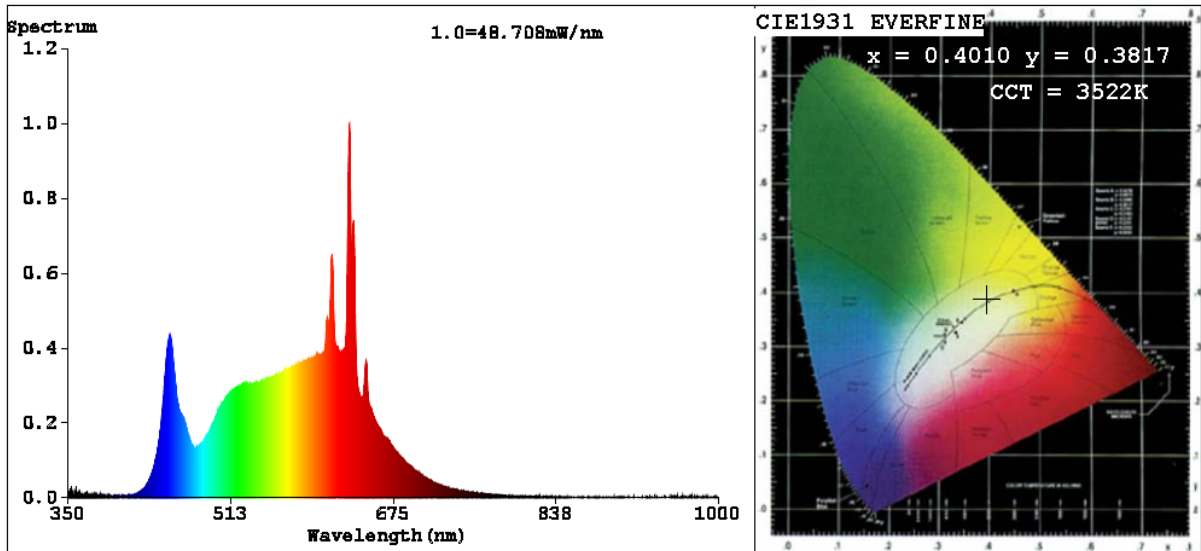

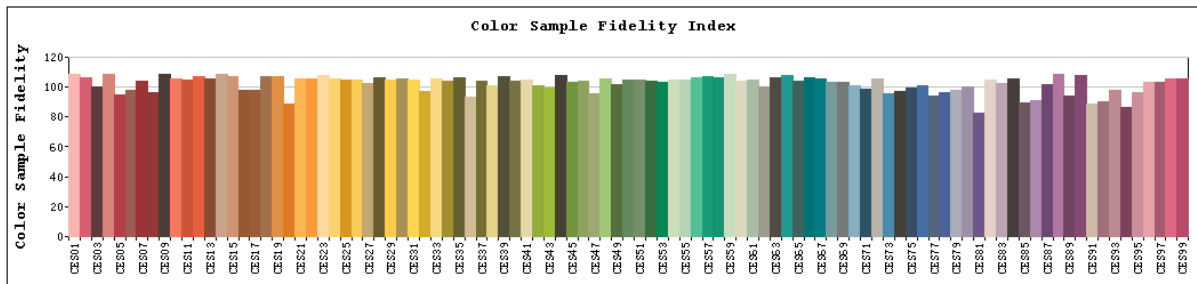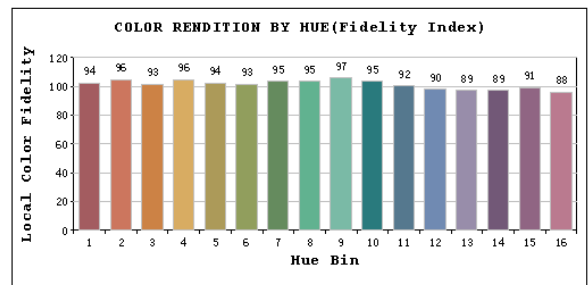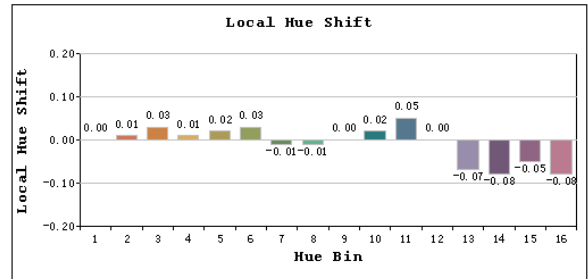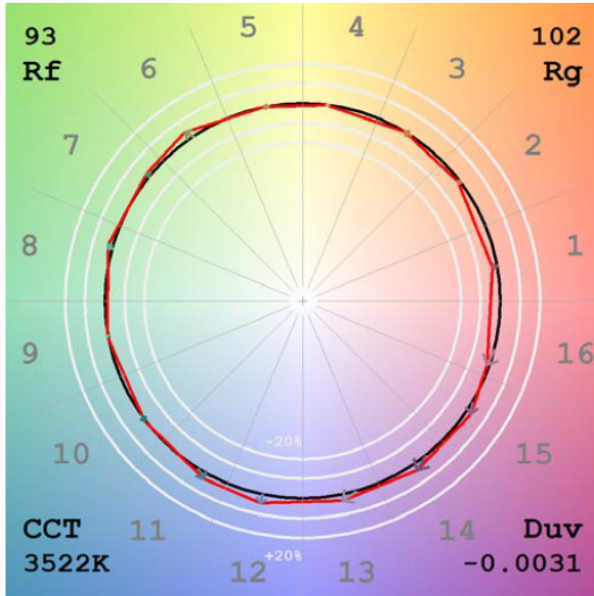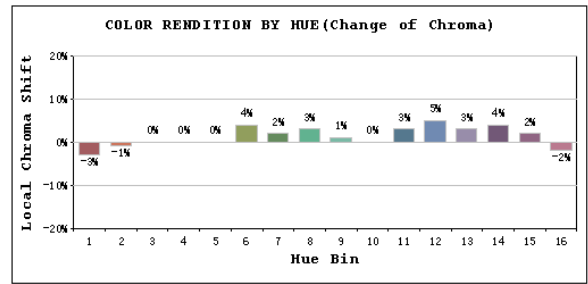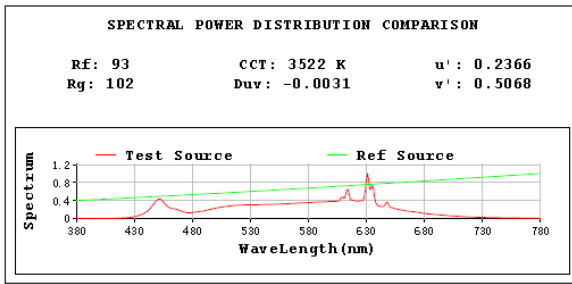

## 2.1.5 Electrical, Photometric and Chromaticity Measurements

<b>Test date</b>	2025-11-19	<b>Test Ambient:</b>	25.1 °C
<b>Test Orientation</b>	As intended	<b>Stabilization Time (min)</b>	90
<b>Model Number</b>	WFRX-6RB/NL	4000K	

### Electrical Measurement:

Sample No.	Voltage (Vac)	Frequency (Hz )	Current (A)	Power (W)	Power Factor
202510160006	120.0	60	0.102	12.00	0.980


### Chromaticity Measurement - Sphere-Spectroradiometer Method:







Parameter	Result	Special Color Rendering Indices			
Test Voltage (V)	120	R1	98	R9	87
Frequency (Hz)	60	R2	99	R10	96
CCT (K)	4005	R3	96	R11	94
Duv	-0.0019	R4	97	R12	78
Chromaticity (x, y)	x=0.3790 y=0.3719	R5	99	R13	99
Chromaticity (u', v')	u'=0.2261 v'=0.4992	R6	96	R14	97
Color Rendering Index (CRI)	97.2	R7	97	R15	98
R9	87	R8	95	--	--
Rg	102				
Rf	94				
Rcs,h1%	-3				

### Photometric Measurement – Goniophotometer Method:

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Total Luminous (lm)	1223.6
Luminous Efficacy (lm/W)	101.96


# Spectral Power Distribution & Chromaticity Diagram

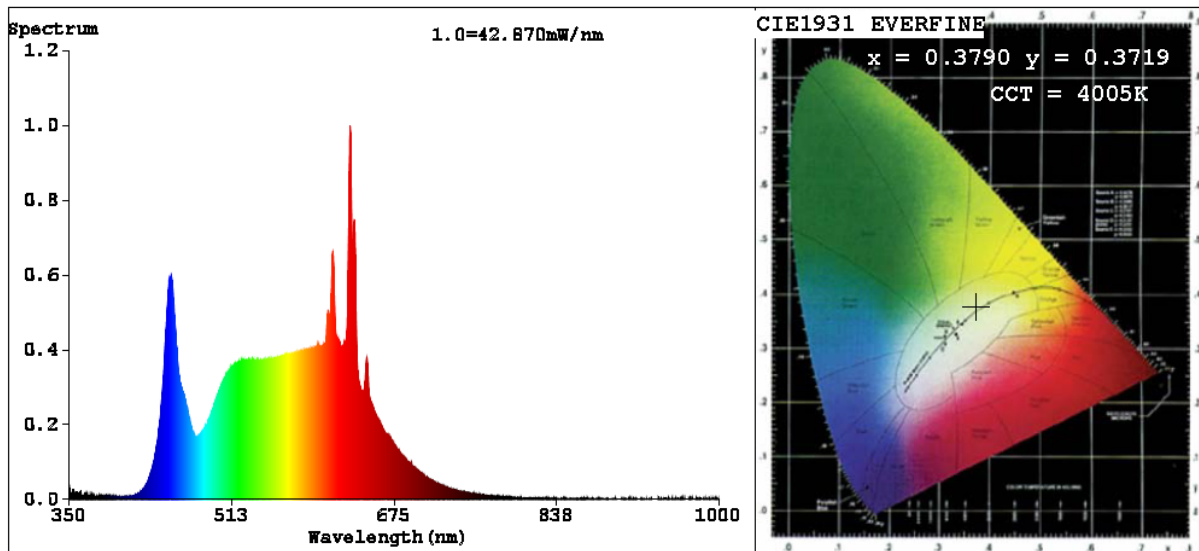

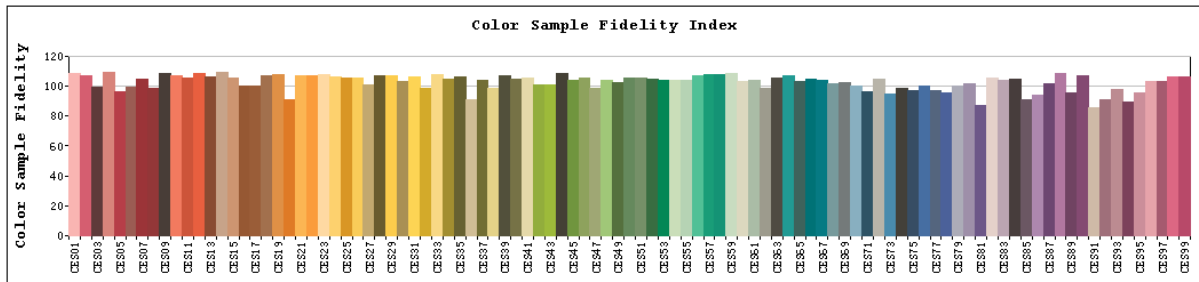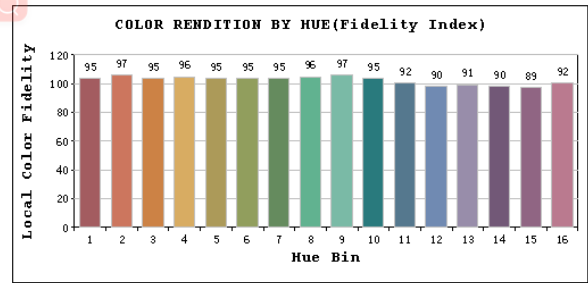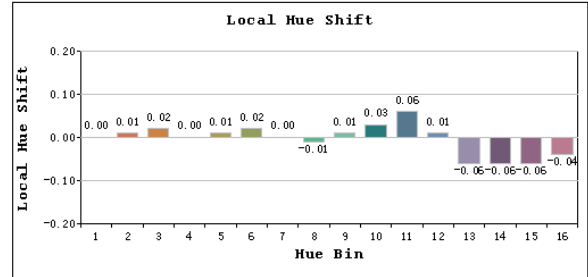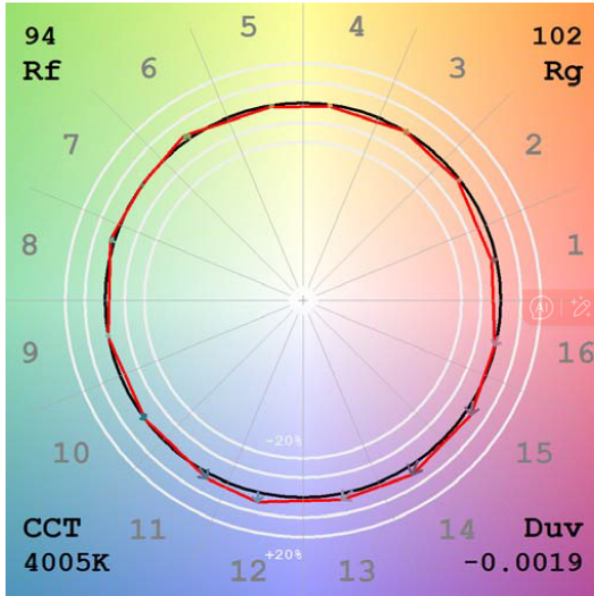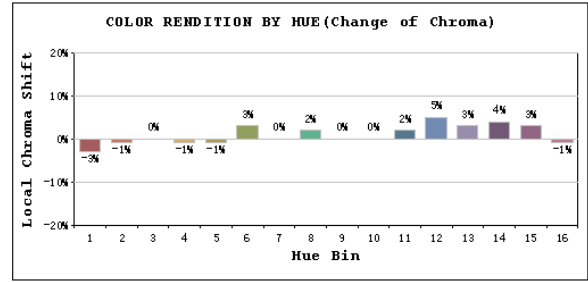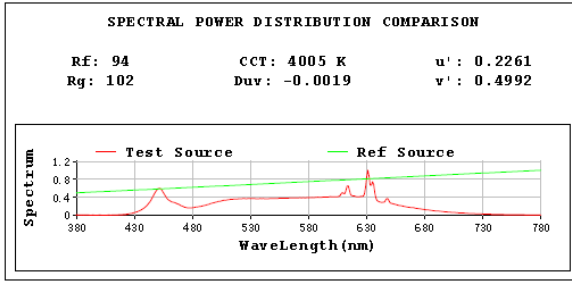

Sample No.	Wattage and CCT setting	Test Voltage(V)	Flux(lm)	P(W)	Luminous Efficacy lm/W
WFRX-6RB/NL	9W-5000K setting	120	910.6	8.88	102.55
	11W-5000K setting	120	1077.9	10.50	102.66
	13W-2700K setting	120	1185.5	12.10	97.98
	13W-3000K setting	120	1198.6	12.10	99.06
	13W-3500K setting	120	1215.7	12.00	101.31
	13W-4000K setting	120	1223.6	12.00	101.96
	13W-5000K setting	120	1230.4	12.10	101.69

**3. Product Photo**

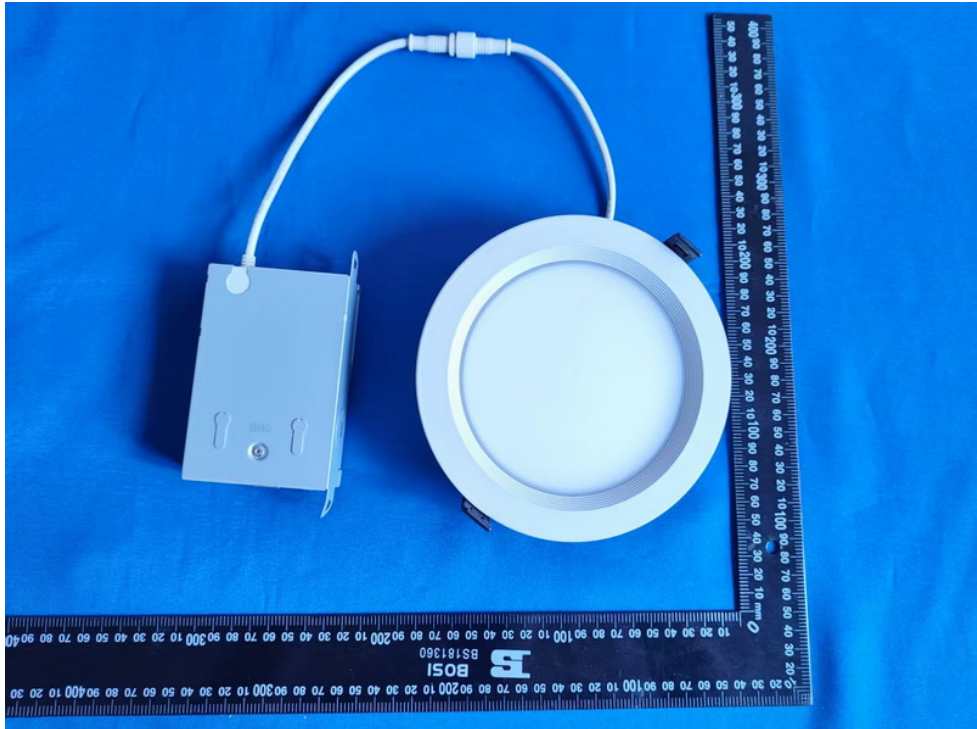

**\*\*\*\*\* END OF REPORT \*\*\*\*\***