



| | |
|---------------------|--------------|
| Project: | Type: |
| Prepared By: | Date: |

| Driver Info | | LED Info | |
|-------------|------------------|----------------|----------------------|
| Type | Constant Current | Watts | 150W |
| 120V | N/A | Color Temp | 4000K (Neutral) |
| 208V | N/A | Color Accuracy | 84/84/83 CRI |
| 240V | N/A | L70 Lifespan | 100,000 Hours |
| 277V | N/A | Lumens | 10807/13144/19897 lm |
| Input Watts | 74/90.6/145W | Efficacy | 146.1/145/137.2 lm/W |

Technical Specifications

Field Adjustability

Field Adjustable (Wattage):

Field adjustable light output in 3 discrete steps:
Medium Housing: 150W/90W/78W (factory default 150W)

Compliance

UL Listed:

Suitable for wet locations

IP Rating:

Ingress protection rating of IP66 for dust and water

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

DLC Listed:

This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at designlights.org to confirm the qualification status of a specific SKU prior to specification or purchase.

LED Characteristics

LEDs:

Long-life, high-efficiency, discrete, surface-mount LEDs

Color Consistency:

7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Color Stability:

LED color temperature is warranted to Shift no more than 200K in color temperature over a 5-year period

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for (SSL) Products, ANSI C78.377-2017.

Electrical

Driver:

78W: Constant Current, Class 2, 480V, 50/60 Hz, 480V:0.20A

90W: Constant Current, Class 2, 480V, 50/60 Hz, 480V:0.23A

150W: Constant Current, Non-Class 2, 480V, 50/60 Hz, 480V: 0.32A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

6.06% 480V

Power Factor:

95.8% at 480V

Surge Protection:

Line to Line: 10 kV
Line to Ground: 6 kV

Performance

Lifespan:

100,000-Hour LED lifespan based on IESlm-80 results and TM-21 calculations

Wattage Equivalency:

Equivalent to 400W Metal Halide

Optical

IES Classification:

The Type II distribution is meant for lighting large areas, located by the roadside. Typically found on wide walkways, on ramps, entrance roadways and bike paths.

Bug Rating:

150W: B3 U0 G2
90W: B3 U0 G2
78W: B3 U0 G1

Technical Specifications (continued)

Construction

Cold Weather Starting:

The minimum starting temperature is -40°F (-40°C)

Ambient Temperature :

Max Power Temp Rating: 104°F (40°C)

Middle Power Temp Rating: 52°C (125°F)

Low Power Temp Rating: 54°C (130°F)

Housing:

Die-cast aluminum

Tilt Increment:

Rotates in 5 degree increments

Lens:

Polycarbonate lens

Reflector:

Aluminum reflector with white polycarbonate

Vibration Rating:

3G vibration rating per ANSI C136.31

Effective Projected Area (EPA):

1 Fixture: 0.42

2 Fixtures at 90°: 0.66

2 Fixtures at 180°: 0.83

3 Fixtures at 90°: 1.08

4 Fixtures at 90°: 1.08

Gaskets:

High-temperature silicone gaskets

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Installation

Mounting:


2 3/8" slipfitter mount with stainless steel hardware

Other

10-Year, No-Compromise Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of ten (10) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

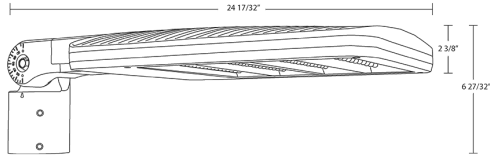

Features

- 0-10V dimmable standard
- IP66 Rated
- 100,000-Hour LED lifespan
- 10-Year, No-Compromise Warranty

Ordering Matrix

| Family | Housing Size | Distribution | Mounting | Color Temp | Finish | Driver | Options |
|--------|---|---|---|---|---|---|---|
| ALED | M | 2T | SF | N | W | /480 | |
| | M = Medium (150W/90W/78W) L = Large (260W/220W/170W) XL = Extra Large (385W/345W/300W) S = Small (80W/60W/40W) | 2T = Type II 3T = Type III 4T = Type IV 5T = Type V AT = Auto Dealership Optic | Blank = Universal Pole Mount SF = Slipfitter WM = Wall Mount | Blank = 5000K Cool Y = 3000K Warm ¹ N = 4000K Neutral | Blank = Bronze W = White B = Black | Blank = 120-277V, 0-10V Dimming /480 = 480V, 0-10V Dimming | Blank = No Option /7PR = 7 Pin Twistlock Receptacle /WS2 = Wattstopper, 20ft lens /WS4 = Wattstopper, 40ft lens ³ |

¹ Dark sky approved in 3000K, available only on Small and Medium fixtures

² 480V available only on Medium, Large & Extra Large fixtures

³ Wattstopper option available only On Large & Extra Large fixtures