



Color: Bronze

Weight: 2.9 lbs

| | |
|---------------------|--------------|
| Project: | Type: |
| Prepared By: | Date: |

| Driver Info | | LED Info | |
|-------------|-------------------|----------------|------------------|
| Type | Constant Current | Watts | 40/30/20W |
| 120V | 0.34A/0.25A/0.17A | Color Temp | 3000/4000/5000K |
| 208V | N/A | Color Accuracy | 82-86 CRI |
| 240V | N/A | L70 Lifespan | 100,000 Hours |
| 277V | 0.15A/0.11A/0.09A | Lumens | 3,160-5,899 lm |
| Input Watts | 21.5-40.5W | Efficacy | 130.9-156.1 lm/W |

Technical Specifications

Compliance

UL Listed:

Suitable for wet locations

IP Rating:

Ingress protection rating of IP65 for dust and water

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

DLC Listed:

This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at designlights.org to confirm the qualification status of a specific SKU prior to specification or purchase.

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Color Stability:

LED color temperature is warranted to Shift no more than 200K in color temperature over a 5-year period

Color Consistency:

7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Electrical

Driver:

40W: Constant Current, Class 1, 120V or 277V, 50/60Hz, 120V: 0.34A or 277V: 0.15A
 30W: Constant Current, Class 1, 120V or 277V, 50/60Hz, 120V: 0.25A or 277V: 0.11A
 20W: Constant Current, Class 1, 120V or 277V, 50/60Hz, 120V: 0.17A or 277V: 0.09A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

Power Factor:

99.3% at 120V, 97.5% at 277V

Voltage:

120 or 277V

Dim to Off:

Yes

Surge Protection:

4 kV

Aux Power Supply:

Yes

Performance

Lifespan:

100,000-Hour LED lifespan based on IESIm-80 results and TM-21 calculations

Wattage Equivalency:

40W: Replaces up to 175W Metal Halide (MH)

30W: Replaces up to 150W Metal Halide (MH)

20W: Replaces up to 100W Metal Halide (MH)

Construction

Cold Weather Starting:

The minimum starting temperature is -40°F (-40°C)

Technical Specifications (continued)

Maximum Ambient Temperature:

Suitable for use in up to 104°F (40°C)

Housing:

Die-cast aluminum

Lens:

Polycarbonate lens

Reflector:

Polycarbonate

Gaskets:

Silicone rubber

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Installation

Mounting:


PARK34 accommodates surface mounting and its unique, removable adapter allows for both 1/2" and 3/4" NPT pendant mounting (by others).

Other

5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

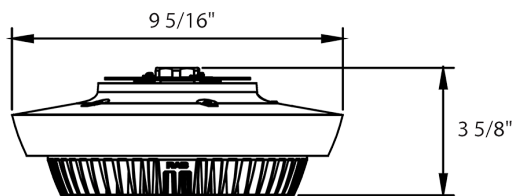

Features

- 0-10V Dimming, standard
- 100,000-hour LED lifespan
- IP65 rating protects against dust and water
- 5-Year, limited warranty

Ordering Matrix

| Family | Wattage | Color Temp | Finish | Driver | Options |
|--------|----------------------------------|--|-----------------------------|-------------------------------------|--|
| PARK34 | 40 | | | | |
| | 40 = 40/30/20W 70 = 70/60/50W | Blank = 3000/4000/5000K CCT Adjustable | W = White Blank = Bronze | Blank = 120V or 277V, 0-10V Dimming | Blank = No Option /E = Battery Backup |