



Color: Bronze

Weight: 9.5 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant	Watts	60/50/40/30W
120V	0.50A	Color Temp	3000/4000/5000K
208V	0.29A	Color Accuracy	82-85 CRI
240V	0.25A	L70 Lifespan	100,000 Hours
277V	0.22A	Lumens	3,727-9,105 lm
Input Watts	29.3-61W	Efficacy	117.1-161.5 lm/W

Technical Specifications

Field Adjustability

Cutoff Adjustability:

45°, 30°, 15° and 0° (factory default 45°)

Field Adjustable:

Field Adjustable Light Output:

60W/50W/40W/30W (factory default 60W)

Color temperature selectable 3000K, 4000K and 5000K (factory default 4000K)

Compliance

UL Listed:

Suitable for wet locations

DLC Listed:

This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at designlights.org to confirm the qualification status of a specific SKU prior to specification or purchase.

Electrical

Driver:

Constant Current, Class 1, 120-277V, 50/60 Hz:
60W: 120V: 0.50A, 208V: 0.29A, 240V: 0.25A, 277V: 0.22A

50W: 120V: 0.41A, 208V: 0.24A, 240V: 0.21A, 277V: 0.19

40W: 120V: 0.34A, 208V: 0.20A, 240V: 0.18A, 277V: 0.15A

30W: 120V: 0.25A, 208V: 0.15A, 240V: 0.13A, 277V: 0.11A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

Photocell:

Integrated photocell included with on/off switch

Battery Backup:

Battery backup will operate the fixture for 90 minutes if power fails. Wired for 120-277V.

Battery Backup Light Loss Factor:

60W: 0.15

50W: 0.18

40W: 0.22

30W: 0.3

Surge Protection:

DM 4 kV+ CM 6 kV

Performance

Lifespan:

100,000-Hour LED lifespan based on IESlm-80 results and TM-21 calculations

Performance Data:

[Click here for the W22-M-60 performance data](#)

Wattage Equivalency:

60W: Replaces up to 250W Metal Halide (MH) or 200W High Pressure Sodium (HPS)

50W: Replaces up to 250W Metal Halide (MH) or 200W High Pressure Sodium (HPS)

40W: Replaces up to 175W Metal Halide (MH) or 150W High Pressure Sodium (HPS)

30W: Replaces up to 150W Metal Halide (MH) or 100W High Pressure Sodium (HPS)

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Technical Specifications (continued)

Construction

Housing:

Die-cast aluminum

Lens:

Glass

Reflector:

Aluminum

Cold Weather Starting:

The minimum starting temperature is 32°F/0°C

Ambient Temperature

Maximum Ambient Temperature:

Suitable for use in up to 122°F (50°C)

Green Technology:

Mercury and UV free. RoHS-compliant components.

Finish:

Formulated for high durability and long-lasting color

Installation

Mounting:

Surface mount for recessed junction box; 3 conduit entry points

Optical

BUG Rating:

60W: B2 U4 G5

50W: B2 U4 G4

40W: B1 U3 G4


30W: B1 U3 G3

Other

5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

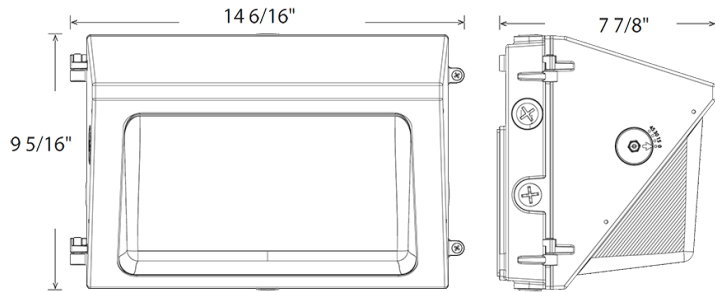

Features

- 100,000-Hour LED lifespan
- 0-10V dimming standard
- 5-Year, limited warranty

Ordering Matrix

Family	Housing Size	Wattage	Color Temp	Finish	Forward Throw	Driver	Controls	Battery Backup
W22	M	60						/E
	M = Medium L = Large S = Small	30 = 30/25/20/15W ¹ 60 = 60/50/40/30W ² 100 = 100/85/70/50W ² 150 = 150/125/100/75W ³	Blank = 3000/4000/5000K Adjustable	Blank = Bronze W = White	Blank = Adjustable Throw 0°/15°/30°/45°	Blank = 120-277V /480 = 480V	Blank = Selectable Photocell /LCBS/MVS = Selectable Photocell w/Lightcloud Blue MVS Sensor	Blank = None /E = Battery Backup

¹ S (Small) models only

² M (Medium) models only

³ L (Large) models only

⁴ Battery backup available only on M (Medium) and L (Large) models with 120-277V